


WMHP Series

Features

- AEC-Q200 (WMHP20 & WMHP35)
- TO-220 & TO-247 standard power packages
- Very low thermal resistance
- Non-inductive thick film technology
- 20 to 100 watt high power resistors
- Single screw mounting to heatsink
- Suitable for high frequency / fast pulse use

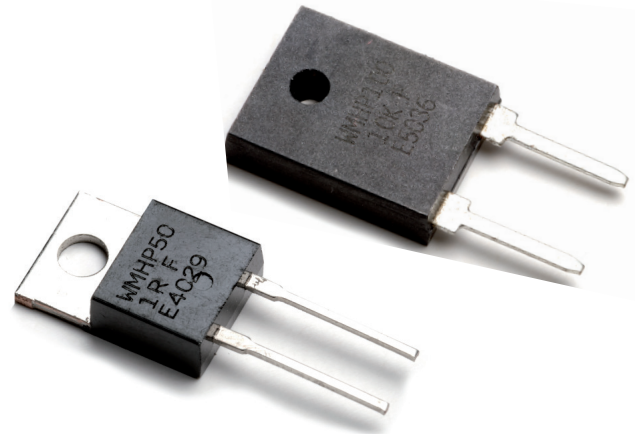

All parts are Pb-free and comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

Electrical Data

| | WMHP20 | WMHP35 | WMHP50 | WMHP100 | Conditions | |
|---------------------------|--------|---|--------|-------------|-------------|---------------------------------------|
| Package style | TO-220 | | | TO-247 | | |
| Power rating | watts | 20 | 35 | 50 | 100 | Heatsink with 25°C flange temperature |
| Power rating | watts | 1.5 | 2.5 | 3 | 3.5 | Without heatsink, in free air 25°C |
| Limiting element voltage | volts | 350 | | | 700 | dc or ac rms |
| Resistance range | ohms | R05 – 10K | | R05 to 100K | | |
| Dielectric strength | volts | 1800 | | | | ac rms for 60s |
| Working temperature range | °C | -65 to 150 | | -65 to 175 | | |
| Insulation resistance | ohms | >10G | | | | Between terminals and tab |
| Tolerances | % | ≤1R0: ±5 >1R0: ±1, ±5 | | | | |
| TCR | ppm/°C | ≤R20: ±1000 >R20-3R0: ±300 >3R0-10R: ±100 >10R: ±50 | | | 25 to 105°C | |
| Standard values | | E24 preferred | | | | |

Physical Data

| Dimensions (mm) & Weight (g) | | | | |
|------------------------------|-------------|-------------|--|--|
| | TO-220 | TO-247 | | |
| A | 10.16 ±0.25 | 15.75 ±0.26 | | |
| B | 15 ±0.3 | 20.7 ±0.26 | | |
| C | 4.6 ±0.2 | 4.95 ±0.26 | | |
| D | 3.85 ±0.15 | 3.63 ±0.1 | | |
| E | 13.75 ±0.5 | 14.48 ±1.27 | | |
| F | 4 max | 2.79 ±0.76 | | |
| G | 5.08 ±0.25 | 3.63 ±0.18 | | |
| H | 0.78 ±0.08 | 1.52 ±0.1 | | |
| J | 1.3 ±0.1 | 10.16 ±0.26 | | |
| K | 6.4 ±0.25 | 5.33 ±0.26 | | |
| L | 0.51 ±0.15 | 0.81 ±0.26 | | |
| M | 2.27 ±0.25 | 2.41 ±0.26 | | |
| Wt | 2.0 nom | 3.7 nom | | |

Performance Data

| Test | Performance |
|--|-------------|
| Load at Rated Power: 2000hrs at rated power | ±ΔR% 1 |
| Short Term Overload: 2 x rated power with applied voltage not to exceed 1.5 x maximum continuous operating voltage for 5 seconds | ±ΔR% 0.5 |
| Damp Heat with Load: 40 ±2°C, 90 – 95% RH, maximum working voltage 1.5 hours on, 0.5 hours off, 1000 hours | ±ΔR% 1 |
| Thermal Shock: -65°C/150°C, 100cycles | ±ΔR% 0.3 |
| Terminal Strength: 2.4N pull test | ±ΔR% 0.2 |

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

BI Technologies IRC Welwyn

www.ttelectronics.com/resistors

WMHP Series

Temperature Derating

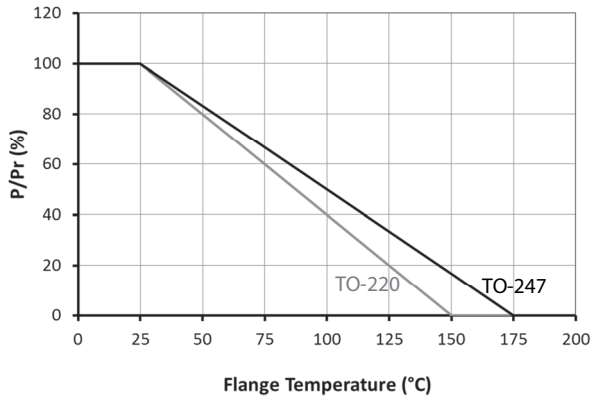


Mounting

The resistor should be mounted to a heatsink using a suitable thermal interface material. The maximum tightening torque for the M3 mounting screw is 0.9Nm.


Pulse Performance

Single Pulse ($P_{mean} \ll P_r$) Condition

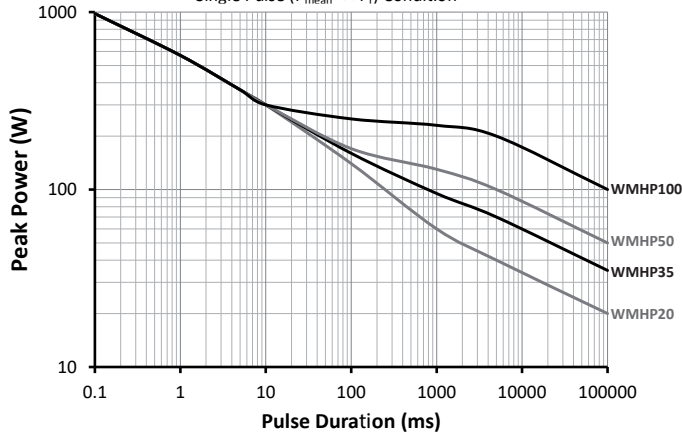

Pulse performance for durations $\geq 1s$ is dependent on mounting conditions. The short term overload power limit is 2 x power rating for 5s.


Typical High Frequency Performance

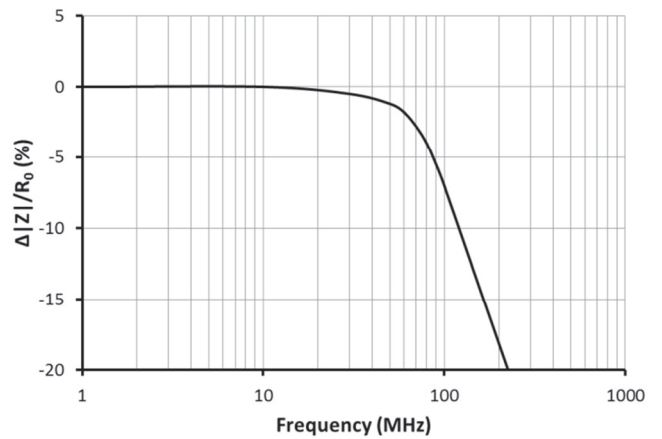

Typical high frequency characteristics for WMHP35-220R. Self resonant frequency is 1GHz.

Ordering Procedure

Example: WMHP35-10KJ (WMHP35 at 10 kilohms $\pm 5\%$, Pb-free)



| 1 | 2 | 3 | 4 | Packing |
|------|--------|------------------|---------------|-----------------|
| Type | Rating | Value | Tolerance | |
| WMHP | 20 | 3 / 4 characters | F = $\pm 1\%$ | Plastic tubes |
| | 35 | R = ohms | J = $\pm 5\%$ | TO-220: 50/tube |
| | 50 | K = kilohms | | TO-247: 30/tube |
| | 100 | | | |

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.