

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0903273320**  
**Status:** **Active**  
**Overview:** Picoflex Ribbon-Cable Connectors  
**Description:** Picoflex PF-50, Low Profile, IDT Receptacle, 20 Circuits, White, Gold (Au) Plated, Bag

**Documents:**

<a href="#">3D Model (PDF)</a>	<a href="#">Application Specification 908140000-AS-000 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Packaging Specification PK-90327-001-001 (PDF)</a>
<a href="#">3D Model</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Product Specification PS-99020-0011-001 (PDF)</a>	

**Agency Certification**


CSA	LR19980
UL	E29179

**General**

Product Family	Ribbon Cable / Wire Trap Connectors
Series	<u>90327</u>
Comments	Low Profile
Component Type	Housing
Gender	Receptacle
Glow-Wire Capable	No
Overview	<u>Picoflex Ribbon-Cable Connectors</u>
Product Name	Picoflex
Taxonomy	Connector Housings
UPC	800753669550

**Physical**

Circuits (Loaded)	20
Circuits (maximum)	20
Color - Resin	White
Durability (mating cycles max)	100
Entry Angle	Vertical
Flammability	94V-0
Lock to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	Polyester
Net Weight	1.180/g
Number of Rows	2
PCB Locator	No
PCB Retention	None
Packaging Type	Bag
Pitch - Mating Interface	1.27mm
Pitch - Termination Interface	1.27mm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	IDT or Pierce
Wire Insulation Diameter	1.00mm max.
Wire Size AWG	26, 28
Wire/Cable Type	Ribbon Cable

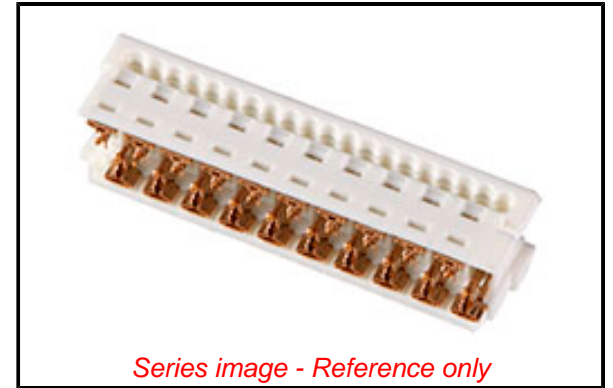

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2022)4187-DC (10  
June 2022)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

90327 Series

**Mates With**

Low Profile Vertical 90325 , Low Profile  
Right Angle 90800 , 90715 , 90814 , 90779  
Vertical, 91714 1.27mm Pitch Picoflex PF-50  
Header

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
Extractor Tool for Connectors	<u>621006000</u>
Extraction Tool for Picoflex PF-50 Connectors, 4-26 Circuits	<u>690081070</u>
PremiumGrade Hand Crimp Tool	<u>690081090</u>

**Electrical**

Current - Maximum per Contact  
Voltage - Maximum

1.2A  
250V

**Material Info****Reference - Drawing Numbers**

Application Specification  
Packaging Specification  
Product Specification  
Sales Drawing

908140000-AS-000  
PK-90327-001-001  
PS-99020-0011-001  
SDA-90327-001

for Picoflex PF-50  
IDT Receptacle,  
4-26 Circuits, 26  
or 28 AWG Flat  
Cable, 1.00mm max.  
thickness

Arbor Press Fixture [690201902](#)

Arbor Press Fixture [690201908](#)

Semi-Automatic [691271001](#)

Bench Press PB14

for 4-26 Circuit

Semi-Automatic [691271004](#)

PB14 Bench Press

with Auto De-reeling

Assembly of De- [691275045](#)

Tape Unit for

PB14 Part Number

691271001

This document was generated on 02/01/2023

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**