


Product description M12-A connecting cable for food and beverage industry, Contacts: 4, unshielded, moulded cable, IP69K, Ecolab, FDA compliant, Special TPE grey, 4 x 0.34 mm<sup>2</sup>, stainless steel, 10 m

Area M12-A series 763  
Part no. 77 3730 3727 40404-1000


### Illustration



### Scale drawing

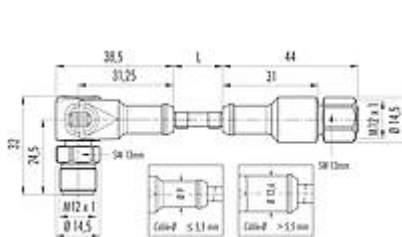

### Contact arrangement (Plug-in side)

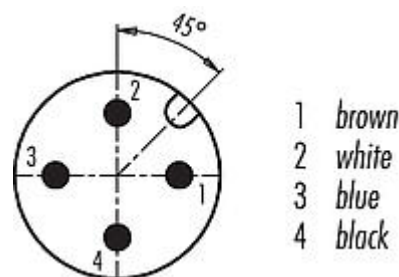

## Technical data

### General features

Part no.	77 3730 3727 40404-1000
Connector design	connecting cable for food and beverage industry
Cable length	10 m
Version	connecting cable
Connector locking system	screw
Termination	moulded cable
Degree of protection	IP69K IP67
Cross-sectional area	0.34 mm <sup>2</sup> / AWG 22
Temperature range from/to	-40 °C / 105 °C
Mechanical operation	> 100 Mating cycles
Additional information	stainless steel
Weight (g)	75.00
Customs tariff number	85444290

### Electrical parameters

Rated voltage	250 V
Rated impulse voltage	2500 V
Rated current (40 °C)	4,0 A
Insulation resistance	≥ 10 <sup>10</sup> Ω
Pollution degree	3
Overvoltage category	II
Insulating material group	II
EMC compliance	unshielded

# Product data sheet

## Automation technology - sensors and actuators



Product description	M12-A connecting cable for food and beverage industry, Contacts: 4, unshielded, moulded cable, IP69K, Ecolab, FDA compliant, Special TPE grey, 4 x 0.34 mm <sup>2</sup> , stainless steel, 10 m
Area	M12-A series 763
Part no.	77 3730 3727 40404-1000

### Material

Housing material	PP
Contact body material	PP
Contact material	CuZn (brass) / CuSn (bronze)
Contact plating	Au (gold)
Locking material	stainless steel
REACH SVHC	None (No pollutants)
SCIP number	SCIP-number not available

### Authorization/approvals

Approvals	Ecolab, FDA compliant
-----------	-----------------------

### Classifications

eCl@ss 11.1	27-06-03-11
ETIM 7.0	EC001855

### Declarations of conformity

Low Voltage Directive	2014/35/EU (EN 60529:1991;EN 60204-1:2018)
RoHS Directive	2011/65/EU (EN 50581:2012)

### Cable data - Structure of the cable

Cable diameter	4.7 mm
Cross section	4 x 0.34 mm <sup>2</sup>
Sheath material	Special TPE
Single-lead insulation	modified TPE
Single-lead structure	43 x 0.10 mm
Cable color	grey

### Cable data - Mechanical properties

Bending radius, fixed cable	≥ 5 x Ø
Bending radius, moving cable	≥ 10 x Ø
Bending cycles	2 million
Permitted acceleration	5 m/s <sup>2</sup>
Travel speed	≤ 200 m/min (5 m horizontal distance)

### Cable data - Thermal properties

Temperature range cable in move from/to	-25 °C / 105 °C
Temperature range cable fixed from/to	-50 °C / 105 °C



Product description	<b>M12-A connecting cable for food and beverage industry, Contacts: 4, unshielded, moulded cable, IP69K, Ecolab, FDA compliant, Special TPE grey, 4 x 0.34 mm<sup>2</sup>, stainless steel, 10 m</b>
Area	<b>M12-A series 763</b>
Part no.	<b>77 3730 3727 40404-1000</b>

## **General Disclaim Notice**

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP 67 and IP 68 are not suitable for use under water. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).