

Start Track Spot Small DALI


START Track Spot S DALI 1350lm 940 WB BLK

0004948



Product features

- Spotlight for track mounting, decorative heat sink, black (RAL 9005) housing, equipped with Global GAC69 Pulse Adaptor, 1352 Lm, 14 W, 97 Lm/W, 4000 K, drive current: 350 mA, CRI 90, 64° beam angle, DALI dimmable, IP20, IK02, 50000 hrs, (H x W) 200 x 140 mm.

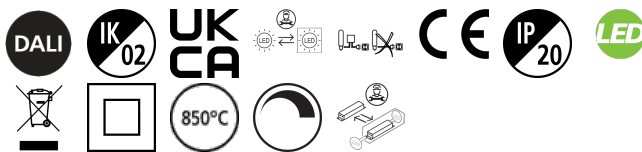

PRODUCT OVERVIEW

Product name	START Track Spot S DALI 1350lm 940 WB BLK
Technology	LED
Housing	Aluminium
Mount	Track mounting
Fixture rating	Enclosed
General application	Retail
ETIM Class	EC001744
E-number FI	4274483
E-number SE	7426222
Warranty	5 years
Fixture luminous flux (lm)	1352
Luminaire efficacy (lm/W)	97
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	64
Photobiological Risk Group	RG1
Total power consumption (W)	14
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK02
Product EAN number	5410288049489

Start Track Spot Small DALI

START Track Spot S DALI 1350lm 940 WB BLK
0004948

DATA TABLE

General data

Product name	START Track Spot S DALI 1350lm 940 WB BLK
Technology	LED
Housing	Aluminium
Mount	Track mounting
Fixture rating	Enclosed
General application	Retail
Operating temperature range (°C)	1°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4274483
E-number SE	7426222
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1352
Luminaire efficacy (lm/W)	97
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	64
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	14
Current (A)	0.06
Mains voltage (V)	230-240V
Lamp power factor	0.96
Electrical protection	Class II
Control gear required	Yes
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	350
Inrush Current (A)	20
Inrush Duration (µs)	140
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	40

Start Track Spot Small DALI

START Track Spot S DALI 1350lm 940 WB BLK

0004948

Max. Luminaires per 13A C Breaker	56
Max. Luminaires per 16A C Breaker	64
Max. Luminaires per 20A C Breaker	80
Max. Luminaires per 10A B Breaker	21
Max. Luminaires per 13A B Breaker	28
Max. Luminaires per 16A B Breaker	35
Max. Luminaires per 20A B Breaker	44

Lifetime data

Lifespan L70 B50	50000
Lifespan L70 B20	50000
Lifespan L70 B10	50000
Lifespan L80 B50	50000
Lifespan L80 B20	50000
Lifespan L80 B10	50000
Lifespan L90 B50	50000
Lifespan L90 B20	50000
Lifespan L90 B10	50000

Physical data

Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK02
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Width (mm)	140
Nominal Product Height (mm)	200
Weight (kg)	0.94

Packaging

Single packaging type	Carton
Product EAN number	5410288049489
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05410288049489
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

Safety data

Optimal operating condition (°C)	1-25
Dry applications use only	Yes

PHOTOMETRY


Start Track Spot Small DALI

START Track Spot S DALI 1350lm 940 WB BLK
0004948

0.5	0.62	E(0°) E(C0)	31.8°	8568 1721
1.0	1.24	E(0°) E(C0)	31.8°	1390 430
1.5	1.86	E(0°) E(C0)	31.8°	618 191
2.0	2.48	E(0°) E(C0)	31.8°	347 108
2.5	3.10	E(0°) E(C0)	31.8°	222 69
3.0	3.72	E(0°) E(C0)	31.8°	154 48

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 63.6°)

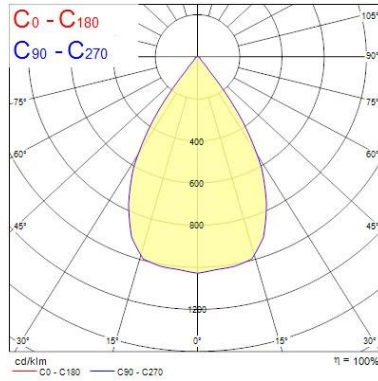

TECHNICAL DRAWINGS

