



Model Number

NMB6-12GH50-E2

Features

- 6 mm flush
- Active surface metal
- One-piece housing with stainless steel (V4A; 1.4435)

Accessories

BF 12
Mounting flange, 12 mm

Technical Data

General specifications

Switching function		Normally open (NO)
Output type		PNP
Rated operating distance	s_n	6 mm
Installation		flush in mild steel
Output polarity		DC
Assured operating distance	s_a	0 ... 4.86 mm
Reduction factor r_{AI}		1
Reduction factor r_{CU}		0.85
Reduction factor r_{304}		0.5 (0.9 of material thickness 2 mm)
Reduction factor r_{Si37}		1
Output type		3-wire

Nominal ratings

Installation conditions		
A		0 mm
B		6 mm
C		18 mm
F		50 mm
Operating voltage	U_B	10 ... 30 V
Switching frequency	f	0 ... 600 Hz
Hysteresis	H	3 ... 15 typ. 5 %
Reverse polarity protection		yes
Short-circuit protection		yes
Voltage drop	U_d	≤ 2 V
Operating current	I_L	0 ... 200 mA
Off-state current	I_r	≤ 0.1 mA
No-load supply current	I_0	≤ 10 mA
Time delay before availability	t_v	≤ 40 ms
Switching state indicator		LED, yellow

Limit data

Operating pressure statically	80 bar (1160.3 psi) max.
-------------------------------	--------------------------

Functional safety related parameters

MTTF _d	652 a
Mission Time (T _M)	20 a
Diagnostic Coverage (DC)	0 %

Ambient conditions

Ambient temperature	-25 ... 85 °C (-13 ... 185 °F)
---------------------	--------------------------------

Mechanical specifications

Connection type	cabLe TPE-S, 2 m
Housing material	Stainless steel 1.4435 / AISI 316L
Sensing face	Stainless steel 1.4435 / AISI 316L
Degree of protection	IP68 / IP69K
Mass	112 g


Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012


Approvals and certificates

UL approval	cULus Listed, General Purpose
CCC approval	CCC approval / marking not required for products rated ≤ 36 V


Dimensions

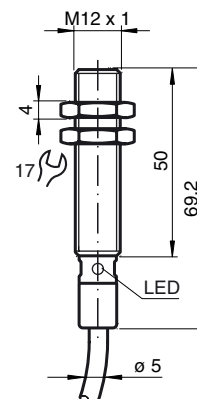

Electrical Connection



Installation Conditions

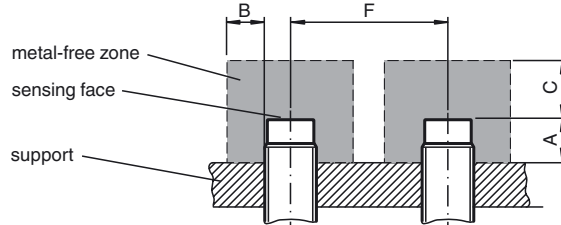

Release date: 2017-12-20 14:02 Date of issue: 2017-12-20 288263_eng.xml