

SAIL-ZW-M12BW-3L3.0V

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

Our developers have focused specifically on this issue and designed a host of different M8 and M12 sensor-actuator cables so you are bound to find the solution you need for your application.

Is there something you have not managed to find or you feel needs explanation? Talk to us!

General ordering data

Type	SAIL-ZW-M12BW-3L3.0V
Order No.	1466210300
Version	Sensor/actuator line, Connecting line, M12 / M12, Number of poles : 3, 3 m, Twin cabling, Shielded: No, LED: Yes, Sheath material: PVC, Halogen: Yes
GTIN (EAN)	4050118275469
Qty.	1 pc(s).

SAIL-ZW-M12BW-3L3.0V**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data**Dimensions and weights**

Net weight 254 g

Technical specifications for cable

Number of poles	3	Core cross-section	0.34 mm ²
Outside diameter	4.9 ± 0.2 mm	Shielded	No
Insulation	PVC	Colour coding	brown, blue, black
Sheath material	PVC	Sheathing colour	Black
Cable length	3 m	Temperature range, moving	-5...80 °C
Temperature range, stationary	-30...80 °C	Halogen	Yes
Suitable for cable carriers	No	Torsion resistance	0 °/m
Resistant to welding beads	No		

General technical data

Version	Twin cabling	connection thread	M12 / M12
Housing main material	PUR	Threaded ring material	Brass, nickel-plated
Coding	A	Protection degree	IP65, IP66, IP67, IP68, when screwed in
Contact surface	Gold-plated	LED	Yes
Rated voltage	24 V	Rated current	4 A
Insulation resistance	10 ⁸ Ω	Temperature range of housing	-25...+85 °C
Tightening torque	M12: 0.8 - 1.2 Nm	Plugging cycles	≥ 100
Pollution severity	3	jumpered	No

Standards

Connector standard IEC 61076-2-101 Certificate no. (cULus) E307231

Classifications

ETIM 6.0	EC001855	eClass 6.2	27-06-91-90
eClass 7.1	27-06-91-90	eClass 8.1	27-06-91-90
eClass 9.0	27-06-91-90	eClass 9.1	27-06-03-13

Approvals

Approvals



ROHS

Conform

Downloads


Brochure/Catalogue [FL FIELDWIRING EN](#)
 Engineering Data [EPLAN, WSCAD](#)

SAIL-ZW-M12BW-3L3.0V

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com


Drawings

Dimensioned drawing

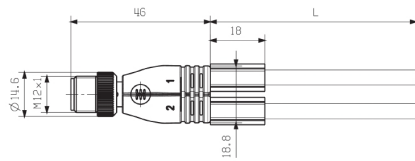


Twin male connector, straight

Pole scheme

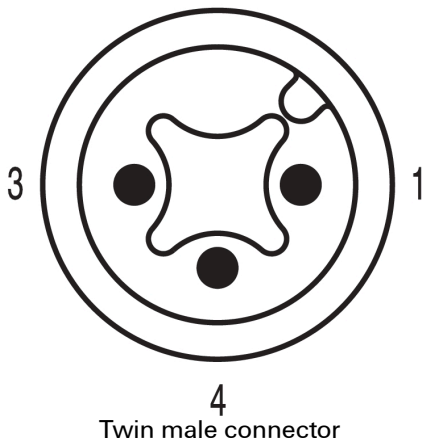


Twin male connector

Wiring diagram

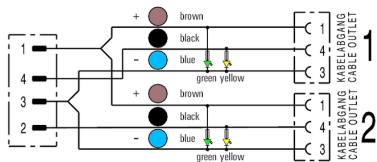


Dimensioned drawing

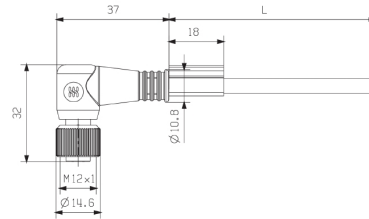

Angled socket

Pole scheme

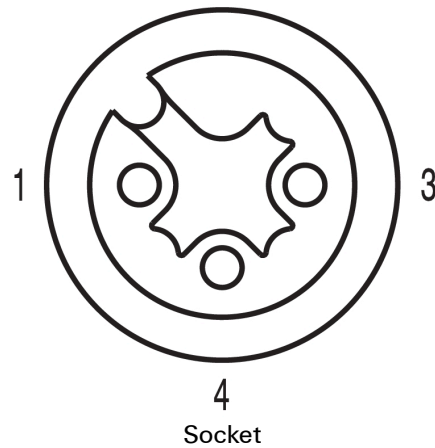

Socket

The ideal tool, the Screwty® with torque function



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F