

T8 Luxline Plus

F70W/T8/840 (184)

0001094



Product features



PRODUCT OVERVIEW

Product name	F70W/T8/840 (184)
Technology	Fluorescent
Watt (Rated) (W)	69.50
Lamp shape	Tube, double-ended
Type	T8 Luxline Plus
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC000108
E-number FI	4940246
E-number Norway	3800917
Luminous flux (lm)	6200
Colour temperature (K)	4000
Light colour	Cool White
Colour Code	840
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	70.00
Product Voltage (V)	128
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Average life (Nominal) (h)	20000
Product EAN number	5410288010946

DATA TABLE

General data

Product name	F70W/T8/840 (184)
Technology	Fluorescent
Watt (Rated) (W)	69.50
Lamp shape	Tube, double-ended
Type	T8 Luxline Plus
Cap/Base	G13
Lamp finish	Frosted/Coated

T8 Luxline Plus

F70W/T8/840 (184)

0001094

Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC000108
E-number FI	4940246
E-number Norway	3800917

Optical data

Luminous flux (lm)	6200
Luminous flux (Rated) (lm)	6200
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	4000
Light colour	Cool White
Colour Code	840
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.96
Rated lumen maint. factor (%) at 4000 h 50Hz	0.94
Rated lumen maint. factor (%) at 6000 h 50Hz	0.92
Rated lumen maint. factor (%) at 8000 h 50Hz	0.91
Rated lumen maint. factor (%) at 12000 h 50Hz	0.90
Rated lumen maint. factor (%) at 16000 h 50Hz	0.89
Rated lumen maint. factor (%) at 20000 h 50Hz	0.87

Electrical data

Wattage (W)	70.00
Watt (Rated) - High frequency (W)	60.00
Current (A)	0.700
Mains voltage (V)	220-240V
Product Voltage (V)	128
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Drive current (mA)	700
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	81

Lifetime data

Average life (Nominal) (h)	20000
Average life (Rated) (h)	20000

T8 Luxline Plus

F70W/T8/840 (184)

0001094

Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94
Rated survival factor (%) at 12000 h 50Hz	0.92
Rated survival factor (%) at 16000 h 50Hz	0.80
Rated survival factor (%) at 20000 h 50Hz	0.50

Physical data

Nominal Product Length (mm)	1800.0
Nominal Product Diameter (mm)	26
Max. Length base to base (mm) - A	1763.8
Length base to pin Min-Max (mm) - B	1768.5-1770.9
Max. Lamp Length (mm) - C/L	1778.0
Max. Lamp Diameter (mm) - D	28.0
Weight (kg)	0.238


Packaging

Single packaging type	Carton
Product EAN number	5410288010946
Packaging single length / height (cm)	177.8
Packaging single width (cm)	2.9
Packaging single depth (cm)	2.8
DUN14 (outer)	15410288010943
Units per outer package	25
Packaging outer length / height (cm)	180.5
Packaging outer width (cm)	15.5
Packaging outer depth (cm)	15.0

Safety data


Lamp mercury content (mg)	2.80
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

PHOTOMETRY

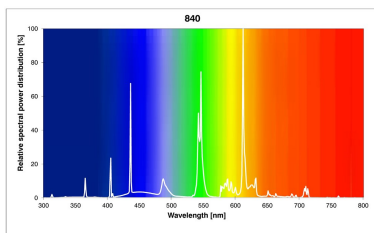


T8 Luxline Plus
F70W/T8/840 (184)
0001094

TECHNICAL DRAWINGS



0001094

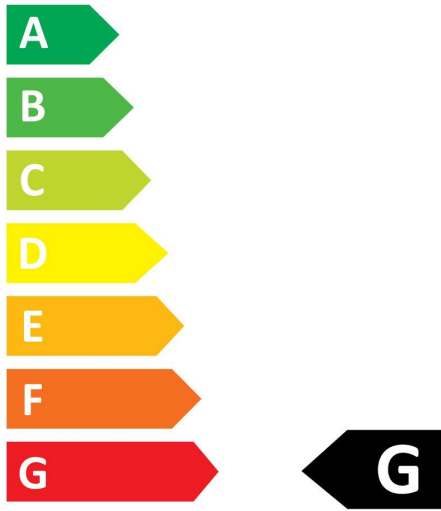

70
kWh/1000h




2019/2015

SYLVANIA

T8 Luxline Plus
F70W/T8/840 (184)
0001094



0001094

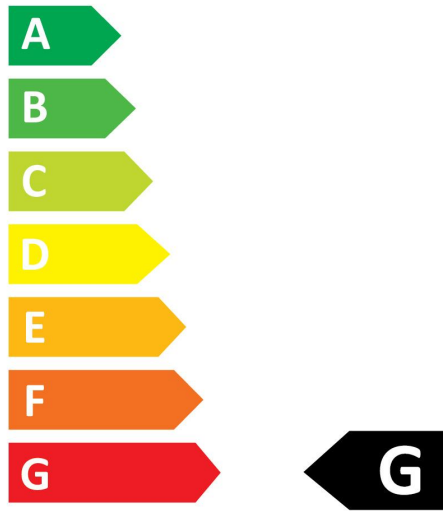

70
kWh/1000h



2019/2015