
Dial Test Indicators

SERIES 513 — Universal Type

FEATURES

• Universal application for all directions. Not only the direction of the measuring point, but also the direction of measurement itself can be adjusted 360 degrees without moving the indicator.






SPECIFICATIONS

Jeweled bearing type

Metric Metric									
Graduation	Order No.		Range	Accuracy	Dial	Measuring			
	Basic set	Full set	Mange	Accuracy	reading	force			
0.01mm	513-304GE	513-304GT	0.8mm	8µm	0-40-0	0.3N or less	v		
Inch	_								
	Order No				Dial	Moscuring			

Graduation	Order No.		Range	Accuracy	Dial	Measuring	
	Basic set	Full set	nange	Accuracy	reading	force	
.0005″	513-302G	513-302GT	.03″	±.0005"	0-15-0	0.3N or less	~

DIMENSIONS AND MASS

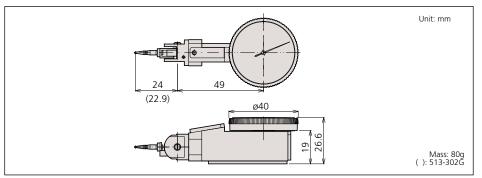

Set Configuration: Metric Full set Swivel clamp, 900321 Contact (for ø4mm stem, ø8mm point, stem, dovetail) ø1mm carbide (102824) Contact point, ø3mm carbide (**102826**) Metric holding bar (L: 100mm) (900209) Stem, 4mm (21CAB106) **Basic set** Carbide contact point, ø2mm (102825) ø8mm stem (Set No. 21CZB129)

Indicator

Knurled clamp ring

Spanner (**102037**)

Set Configuration: Inch

