



Product Overview

LED retrofit lamps are direct replacements for conventional incandescent, halogen, and compact fluorescent (CFL) lamps.

LEDs deliver higher lumens per watt (Im/W) which means significant energy savings while lasting more than ten times longer than incandescent sources. With their directional light, instant on and ability to dim, LEDs are fast becoming the light source of choice

Features

- Ideal to replace traditional R lamps.
- Extra long lifetime, reduces the troubles to frequantly replace the lamp.
- Reliable IC solution for driver.

Safety and Maintenance

- Switch off supply before installing or removing lamp.
- Allow to cool before handling.
- Do not use in totally enclosed fittings as this will reduce lamp life.
- Do not dispose of in household waste.
- Dispose of in appropriate section of local civic amenity site or recycling centre.

Specifications – E27 Cap

SKU	S9016
Lamp Cap	E27
Nominal Power (W)	11.0
Voltage	220-240Vac 50-60Hz
Current (mA)	96
Nominal Luminous Flux (Im)	810
CCT (K)	2700K Warm white
Nominal Lifetime (h)	25000
Dimmable	No
Switching Cycles	40000
Warm-up time to 60% (S)	1.00
Length (mm)	114
Diameter (mm)	80
Mercury (mg)	
Clean-up instructions	See website
Retrofit	Yes
Equivalent Wattage (W)	60
Rated Power (W)	11.0
Rated Luminous Flux (lm)	810
Rated Lifetime (h)	25000
Power Factor	0.50
Rated Peak Candelas (cd)	240
Lumen Maintenance Factor at	
Nominal Lifetime	25000
CRI	80
Start Time (s)	0.50
Ambient Temperature Range (°C)	-20 to 40

Energy Label – E27 Cap


Energy Class	A+
Energy Consumption (kWh/1000h)	11 (11)*

^{*} The kWh/1000h value published on the energy label is required to be rounded up to an integer according to the EU implementing directive on Energy Labelling. The value to 2 decimal places is given for reference.

Product Markings – E27 Cap

Voltage	220-240Vac 50-60Hz
Nominal Power (W)	11.0
Current (mA)	810
CE Mark	Yes
WEEE Mark	Yes
Batch Code	Yes


Dimensions

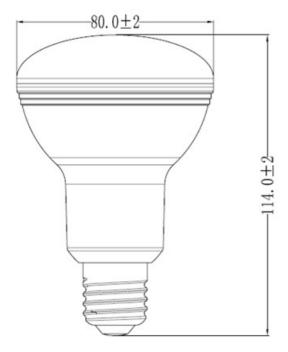

S9016

Photometric Information

2700K

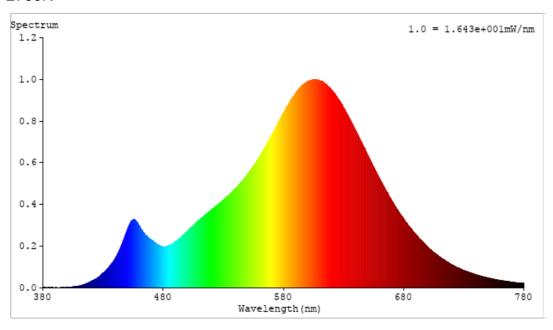

Page: 3