multicomp PRO

RoHS Compliant



Specifications:

Inductance Inductance Tolerance	: 12µH : ± 20%
DC Resistance Max	: 0.12Ω
DC Current Rating	: 1.4A
Inductor Case Style	: SMD
No. of Pins	: 2
Lead Spacing	: 2mm
Core Material	: Ferrite
External Depth	: 5.2mm
External Length / Height	: 4.5mm
External Width	: 5.8mm
Resonant Frequency	: 100kHz
Series	: MCSD54

Electrical Characteristics (at 25°C)

100kHz 0.25V	L	12µH ±20%
at 25°C	DCR	120mΩ (Max.)
100kHz 0.25V Irms = 1.4A	ΔΤ	Temperature Rise 40°C (Max.)

Operating temperature: -55°C to +130°C

Material List

No.	ltem	Material Description
1	Core	R5A CDR5.8 × 4.5(ST) B2.4 F2.3
2	Wire	Ø0.3mm × 1P 2UEWF 155°C
3	Solder (Lead Free)	Sn99.3%/Cu0.7%


Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro



Inductor

multicomp PRO


Schematic Diagram



Note:

1. Wire Ø0.3mm × 1P 2UEWF 155°C 2. 20.5TS (Reference)


Electric Characteristics

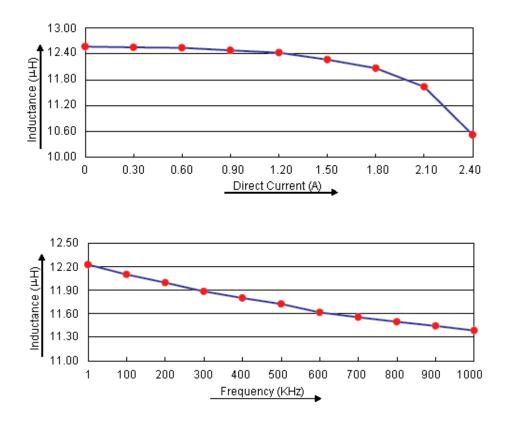

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro



Configurations and Dimensions



Suggest PCB Layout

Α	5.2 ±0.3mm	-
В	5.8 ±0.3mm	-
С	4.5 ±0.35mm	-
D	2mm	(Reference)
E	5.8 ±0.5mm	-

Dimensions : Millimetres

Part Number Table

Description	Part Number
Inductor, 12µH, 1.4A, 20%	MCSD54-120MU

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

