http://support.automation.siemens.com/WW/view/en/33246061&td=1




3-PHASE INFEED TERMINAL, FOR 3-PHASE BUSBARS, CONNECTION FROM ABOVE, SIZE S00/S0



General technical data:		
product brand name		SIRIUS
product designation		3-phase infeed terminals, size S0/S00, from above
Size of the circuit-breaker		S00, S0
Protection class IP / on the front		IP20
Insulation voltage / with degree of pollution 3		
 rated value 	V	690
Ambient temperature		
 during storage 	C	-50+80
during operating	C	-20+60
Installation/mounting/dimensions:		_
Width	mm	44.5
Height	mm	39
Depth	mm	27.2
Acceptability for application / makes the assembly of self- protected combination motor controllers (type E) according to UL 508 possible		No
Connections:		
Design of the electrical connection		
 for main current circuit 		screw-type terminals
Type of the connectable conductor cross-section		
 for main contacts 		
• solid		1x (2.5 16 mm²)

strandedfinely stranded		1x (2	2,5 16 mm²)	
 with conductor end processi 	ina	1x (2	2.5 16 mm²)	
 for AWG conductors / for main 	U U	1x (*	, 10 4)	
			,	
Certificates/approvals:				
Verification of suitability		CE /	UL/CSA/CCC	
General Product Approval			Test Certificates	
CSA	× UL		Manufacturer	
Shipping Approval				
× ABS (American Bureau of Shipping)	X DNV (Det l	Norske Veritas)	SL (Germanischer Lloyd)	× LRS
Shipping Approval	other			
RMRS (Russian Maritime Register)	Manufacturer		other	× VDE
Further information:				
Information- and Downloadcenter (Catalogs http://www.siemens.com/industrial-controls/cat)		
Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/ma	all			
CAx-Online-Generator http://www.siemens.com/cax				
Service&Support (Manuals, Certificates, Ch http://support.automation.siemens.com/WW/vi				
Image database (product images, 2D dimen http://www.automation.siemens.com/bilddb/ca			ce circuit diagrams,)	

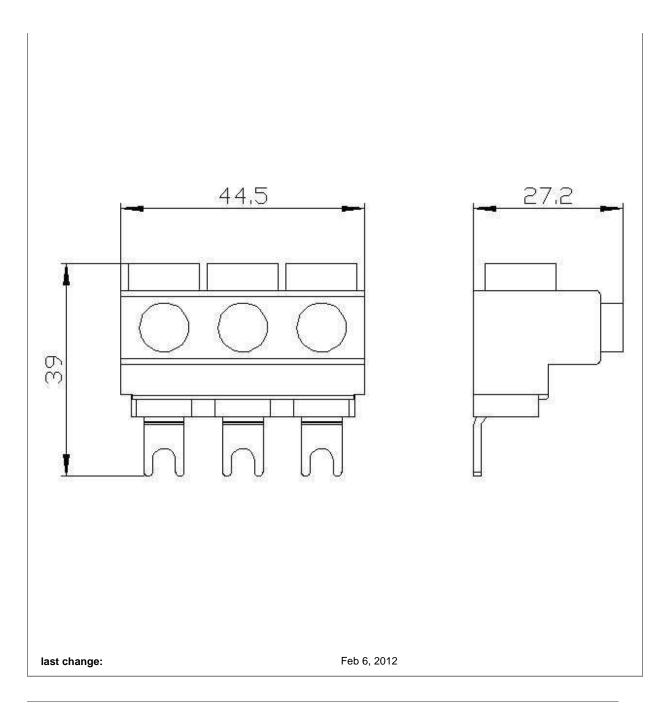

© Siemens AG 2012 - Corporate Information - Privacy Policy - Terms of Use