

SURGE SUPPRESSOR RC ELEMENT WITH WIRE  
 SPACER AC 48 TO 127V/DC 70 TO 150V  
 F.MOUNTING TO THE COIL TERMINAL FOR  
 CONTACTORS SIZE 0 TO 2

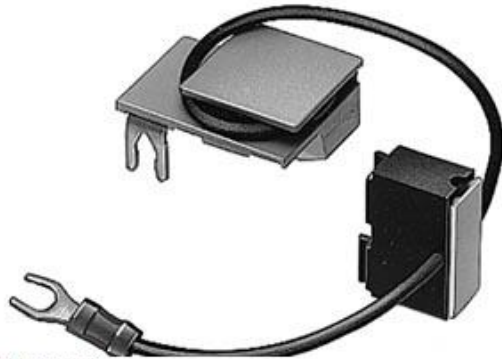


Figure similar

**General technical data:**

<b>Product designation</b>		surge suppressor
<b>Design of the surge suppressor</b>		with RC elements

**Control circuit/ Control:**

<b>Type of voltage of the control supply voltage</b>		AC/DC
<b>Control supply voltage frequency</b>		
• 1 Rated value	Hz	50
• 2 Rated value	Hz	60
<b>Control supply voltage 1</b>		
• for DC		
— Initial rated value	V	70
— Final rated value	V	150
• with AC		
— at 50 Hz Initial rated value	V	48
— at 50 Hz Final rated value	V	127
— at 60 Hz Final rated value	V	127
— at 60 Hz Initial rated value	V	48

**Certificates/ approvals:**



CSA



UR

[Declaration of  
Conformity](#)[Confirmation](#)

#### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/industrial-controls/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/industrymall>**Cax online generator**<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3TX74023S>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3TX74023S>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3TX74023S&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3TX74023S&lang=en)

last modified:

16.03.2015