


Customer: ELFA AB

56-127-83

Transf. No. AA-58064
Designed: 1995-03-27 / ts

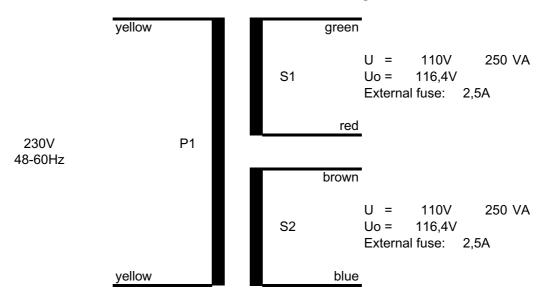

#### Classification

Protection against electrical shock:	Isolating Transformer
Protection index:	IP00
Protection against short-circuit and abnormal use:	Non-short-circuit proof
Time of operation:	Continously
Intended use:	Incorporated
Ambient temperature / Material Classification:	Ta40/E

Assembling: Mounted on a metal plate (130 x 130mm) with four mounting holes.

Dimensions: OD = 135 mm

H = 70 mm

Terminations: Prim: Multistranded Wire Style 3266. Awg 20 L = 200mm

Sec: Solid Copper insulated with tubes of Natvar. L = 200mm

Label on the paper box.

**Toroid** Toroid International AB

Transf.No. AA-58064

ELFA P/N: 56-127-83

Label on transformer.

Toroid International AB
Transf.No. AA-58064
Prim. 230V 48-60Hz ye-ye
Sec. 2x 110V 500 VA gn-re/bn-bu
Fuse: 2,5A



Declaration of Insulation Transformer No. AA-58064
Customer: ELFA AB
Customer Part No: 56-127-83

This transformer is CSA- and UL-Recognized, File No. E115159, according to following standards:

#### UL1950 & CAN/CSA C22.2 No. 950-95

Standard for safety for Information Technology Equipment, including Electrical Business Equipment.

The construction of this transformer also fulfill the requirements according to IEC 601.1, EN 61558-1, EN 60 950, EN 60 065, UL 2601.1, UL 6500, UL 1411.

#### Core.

The core is tapewound with cold-rolled grainoriented silicon steel.

Core Dimensions: 120x70x40 mm

#### **Core Protection.**

The core is insulated with min. four layers of 0,05mm thick Polyesterfilm.

UL-Approved under Guide QMFZ2. Flame Class UL 94VTM-2. Approved for 130°C.

## Copper Wire.

Polyesterimid enamelled copper wire, according to IEC 317-13.

Approved for min. 180°C.

## **Primary Termination.**

Stranded wire: Awg 20

UL-Approved under Guide AVLV2, Style 3266. Approved for 300V and 125°C.

Plus an extra insulation tube. UL-Approved under Guide YDPU2. Approved for 105°C.

# **Secondary Termination.**

The wire ends are insulated with insulation tubes.

UL-Approved under Guide YDPU2. Approved for 300V and 105°C.

# Insulation Primary - Secondary.

The insulation between the primary and the secondary consists of min. six layers of 0,05mm thick Polyester film (total thickness min. 0,3mm).

UL-Approved under Guide QMFZ2. Flame Class UL 94VTM-2. Approved for 130°C.

Two of these layers withstands together 4000Vac for one minute. The creep distance exceeds 8mm and the insulation resistance is more than 5000 Megohm.

### Final Insulation.

The outer insulation consists of min. two layers of 0,05mm thick Polyester film. UL-Approved under Guide QMFZ2. Flame Class UL 94VTM-2. Approved for 130°C.

## Mounting Hardware.

Metal plate (130x130mm) and one metal washer and two rubber pads.



# **EC/EEA Declaration of conformity**

Type of equipment: Isolating Transformer

Brand name: Toroid

Part no: **AA-58064** 

Customer: ELFA AB 56-127-83

Manufactures: Toroid International (Pvt) Ltd Toroid International AB

PO Box 15, Phase 2, FTZ Box 3

Katunayake, Sri-Lanka 351 03 Växjö, Sweden

Toroid India Pvt Ltd Manufacture's representative

Technopark Campus within EEA: Toroid International AB

Trivandrum 695 581 Box 3

Kerala, India 351 03 Växjö, Sweden

As the manufacturer's authorised representative established within EEA, we declare that the product is in conformity with the provision of the EC directives: Low Voltage Directiven (LVD) 73/23/EEG, 93/68/EEG

The product fulfils the requirements according to the following harmonised standards: EN 61558-1, EN 60 950, EN 60 065 and IEC 601-1.

All transformers have been inspected and tested with approved result according to the following:

- 1. Ocular inspection
- 2. No-load input current
- 3. No-load secondary voltage
- 4. Dielectric strength between primary an

The product is to be regarded as a modular component to be used in an electric apparatus that in turn has to fulfil the EMC - directives.

The product itself does not need to be EMC approved for CE marking according to directive 89/336/EEG, 92/31/EEG and 93/68/EEG

Date: 2003-05-07

Thomas Svensson / Design engineer