

# San Ace 40 9CRJ type

## Counter Rotating Fan

### Features

#### High Static Pressure and High Airflow

This fan delivers a maximum static pressure of 2400 Pa and a maximum airflow of 1.06 m<sup>3</sup>/min. Compared with our current model,\* the maximum static pressure has increased by 1.4 times and the maximum airflow has increased by 1.1 times. This fan can efficiently cool high-density equipment that is hard to ventilate, contributing to system downsizing.

#### Energy Saving

Power consumption has been reduced by approximately 20% compared with the current model.\* The PWM control function enables the control of fan speed, contributing to energy saving.

\* San Ace 40 9CRH type 40 x 40 x 56 mm Counter Rotating Fan (model: 9CRH0412P5J001).



## 40 x 40 x 56 mm

### Specifications

The models listed below have pulse sensors with PWM control function.

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle* [%]	Rated current [A]	Rated input [W]	Rated speed [min <sup>-1</sup> ]		Max. airflow [m <sup>3</sup> /min] [CFM]		Max. static pressure [Pa] [inchH <sub>2</sub> O]		SPL [dB(A)]	Operating temperature [°C]	Expected life [h]
						Inlet	Outlet							
9CRJ0412P5J001	12	10.8 to 12.6	100	3.1	37.2	36200	32000	1.06	37.4	2400	9.64	72	-20 to +70	30000/60°C (53000/40°C)
			20	0.1	1.2	4500	4000	0.11	3.9	40	0.16	28		

\* PWM input frequency is 25 kHz; models without specifications at 0% PWM duty cycle have zero fan speed at 0%.


Models with the following sensor specifications are also available as options: Without sensor Lock sensor

### Common Specifications


- Material ..... Frame: Plastic (Flammability: UL 94V-0), Impeller: Plastic (Flammability: UL 94V-0)
- Expected life ..... Refer to specifications  
(L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)  
Expected life at 40°C is for reference only.
- Motor protection function ..... Locked rotor burnout protection, Reverse polarity protection
- Dielectric strength ..... 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance ..... 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)
- Sound pressure level (SPL) ..... At 1 m away from the air inlet
- Operating temperature ..... Refer to specifications (Non-condensing)
- Storage temperature ..... -30 to +70°C (Non-condensing)
- Lead wire ..... Inlet ⊕ Red ⊖ Black (Sensor) Yellow (Control) Brown  
Outlet ⊕ Orange ⊖ Gray (Sensor) Purple (Control) White
- Mass ..... 110 g

### Airflow - Static Pressure Characteristics


- PWM duty cycle

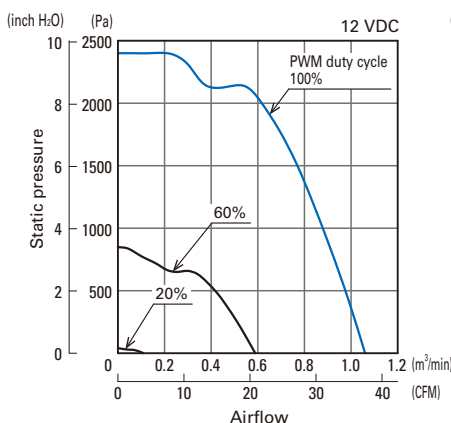

- Operating voltage range

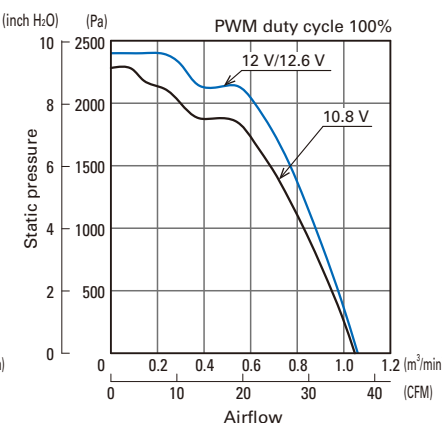


### PWM Duty - Speed Characteristics Example

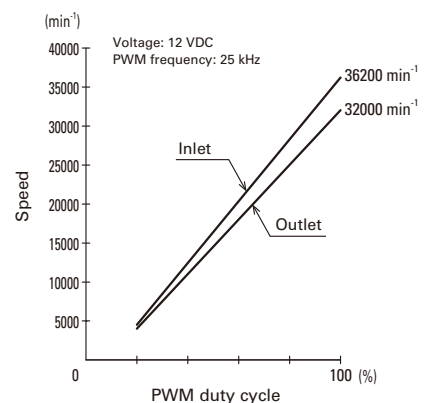

## PWM Input Signal Example


Input signal waveform



$V_{IH} = 2.8 \text{ to } 5.25 \text{ V}$   $V_{IL} = 0 \text{ to } 0.4 \text{ V}$   
 PWM duty cycle (%) =  $\frac{T_1}{T} \times 100$  PWM frequency 25 (kHz) =  $\frac{1}{T}$   
 Current source (I<sub>source</sub>) = 2 mA max. (when control voltage is 0 V)  
 Current sink (I<sub>sink</sub>) = 2 mA max. (when control voltage is 5.25 V)  
 Control terminal voltage = 5.25 V max. (when control terminal is open)


When the control terminal is open,  
 fan speed is the same as when PWM duty cycle is 100%.  
 Either TTL input, open collector or open drain can be used for PWM control input signal.

## Example of Connection Schematic

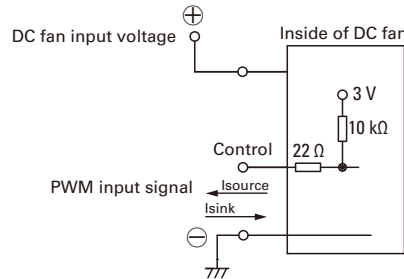


## Specifications for Pulse Sensors


Output circuit: Open collector

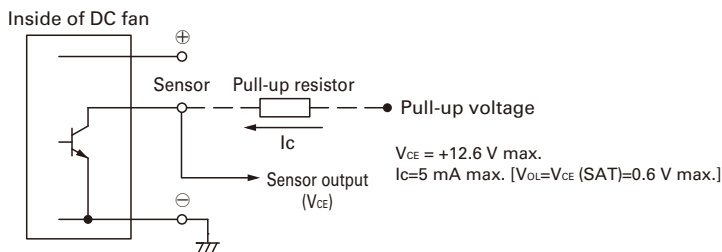


Output waveform (Need pull-up resistor)

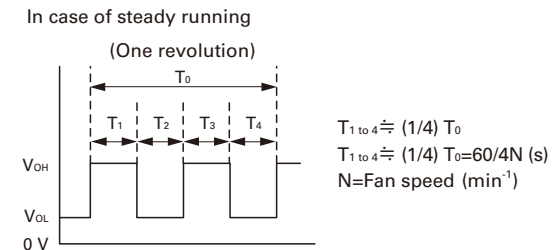

## Dimensions (unit: mm)

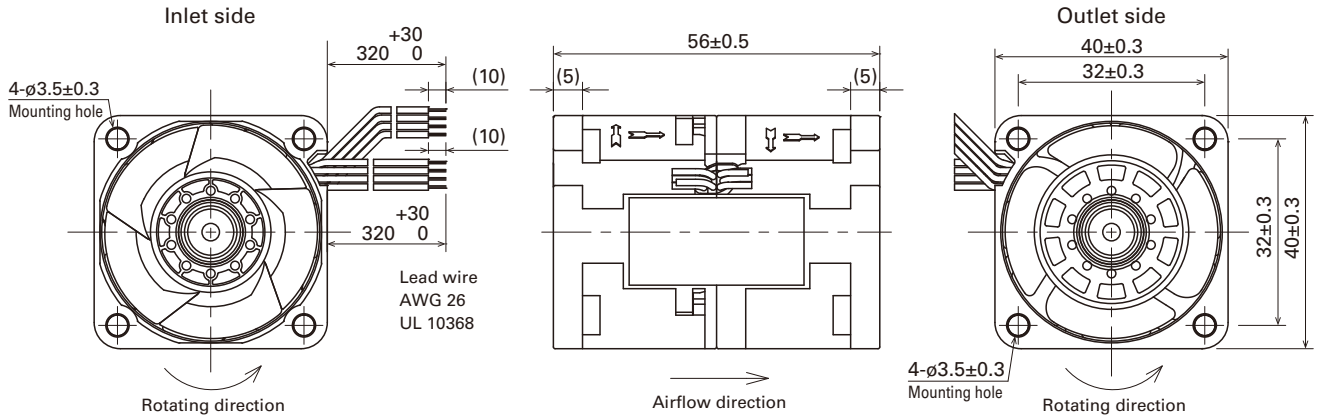

## Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)



## Notice

- Please read the "Safety Precautions" on our website before using the product.
- The products shown in this catalog are subject to Japanese Export Control Law. Diversion contrary to the law of exporting country is prohibited.
- For protecting fan bearings against electrolytic corrosion near strong electromagnetic noise sources, we provide effective countermeasures such as Electrolytic Corrosion Proof Fans and EMC guards. Contact us for details.

**SANYO DENKI CO., LTD.** 3-33-1 Minami-Otsuka, Toshima-ku, Tokyo 170-8451, Japan TEL: +81 3 5927 1020

<https://www.sanyodenki.com>

The names of companies and/or their products specified in this catalog are the trade names, and/or trademarks and/or registered trademarks of such respective companies.  
 "San Ace" is a trademark of SANYO DENKI CO.,LTD.  
 Specifications are subject to change without notice.

CATALOG No. C1109B001 '20.8