



## Pixo Small

*Pixo Small 1600lm 940 NB MB WB WHT*

0005446

Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4278245
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	1615
Luminaire efficacy (lm/W)	95
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	36
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	17
Mains voltage (V)	220-240V
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	10
Electrical protection	Class I
No. Of switching cycles before premature failures	>100000
Dimmable	No
Dimming method	N/A
Drive current (mA)	400
Inrush Current (A)	12
Inrush Duration (µs)	33
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	65
Max. Luminaires per 13A C Breaker	86
Max. Luminaires per 16A C Breaker	108
Max. Luminaires per 20A C Breaker	130
Max. Luminaires per 10A B Breaker	65
Max. Luminaires per 13A B Breaker	86
Max. Luminaires per 16A B Breaker	108
Max. Luminaires per 20A B Breaker	130

### Lifetime data

Lifespan L70 B50	72000
Lifespan L90 B10	15000

### Physical data

IP rating	IP20
IK rating	IK03
Nominal Product Length (mm)	245
Nominal Product Width (mm)	70

## Pixo Small

Pixo Small 1600lm 940 NB MB WB WHT

0005446

Nominal Product Height (mm)	245
Weight (kg)	0.517





### Packaging

Single packaging type	Carton
Product EAN number	5410288054469
Packaging single length / height (cm)	8.5
Packaging single width (cm)	8.5
Packaging single depth (cm)	26.0
DUN14 (outer)	15410288054466
Units per outer package	12
Packaging outer length / height (cm)	35.5
Packaging outer width (cm)	27.0
Packaging outer depth (cm)	28.0

### Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------



## PHOTOMETRY

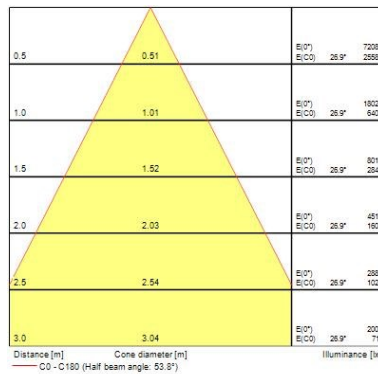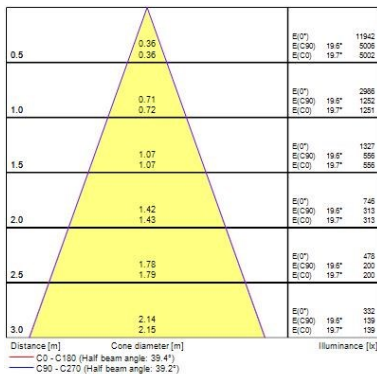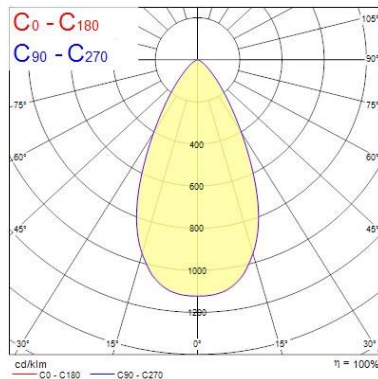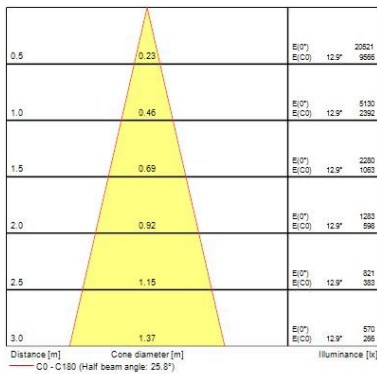

## Pixo Small

Pixo Small 1600lm 940 NB MB WB WHT

0005446

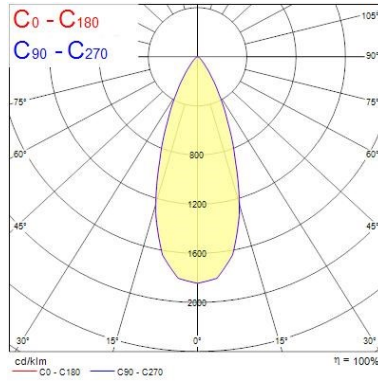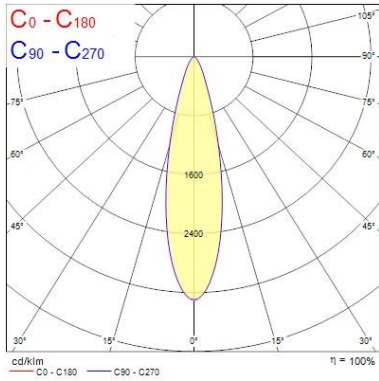

## TECHNICAL DRAWINGS

