OPEN FRAME POWER SUPPLY 24VDC 45WATT

STONTRONICS: PS-45-S24

Features:

- Universal Input
- High Efficiency
- 3 Year Warranty
- Efficiency Level VI





Description:

The 45W open frame power supply range has been specially designed to offer high efficiency, long life and high reliability for use in a variety of applications. Each model is approved to CE, CB, UL and comes with a 3 year warranty.

SPECIFICATION	
MODEL	PS-45-S24
DC Output	24v
Rated Current	1.9A
Ripple and Noise	0°C-60°C - <120mV/ -10°C - 0°C - <200mV
Voltage Range	22.8-26.4V
Voltage Accuracy	±3.0%
Line Regulation	±1.0%
Load Regulation	±3.0%
Set-up Time	≤0.8S @ 230Vac full load
Hold up Time	≥60mS @ 230Vac full load
Temperature Coefficient	±0.05%/
Overshoot and Undershoot	<5.0%
Voltage Range	90Vac~264Vac
Frequency Range	47Hz-63Hz
Efficiency	>85%
AC Current (max.)	<1A (115VAC) <0.6A (230VAC)
Inrush Current	<20A@115Vac <45A@230Vac Cold start
Leakage Current	Input to Output: ≤ 0.25mA ; Input to PG: ≤ 3.5mA
Over Load	3.9-6.2A/ Hiccup mode, auto recovery
Over Voltage	13.8-16.2V/Constant voltage, Auto recovery
Over Power	46.8-75W/Hiccup mode, auto recovery
Shorted Circuit	Long-term mode, auto recovery
Operating amb. Temp. & Hum.	-10°C~60°C; 20%~90%RH No condensing
Storage Temp. & Hum.	-2°C~85°C; 10%~95%RH No condensing
Safety Standards	UL60950-1; EN60950-1: 2006
Withstand Voltage	Input-Output:3.0KVac/10mA; Output-PG: 1.5KVac/10mA;Output-PG: 0.5KVdc/10mA
MTBF	200K
Dimension	101.6×51×28mm
Packing	60PCS/CTN, 11KGS
Cooling method	Cooling by free air convection

OPEN FRAME POWER SUPPLY 24VDC 45WATT





STONTRONICS: PS-45-S24

Diagrams

■ Mechanical Specification

Unit: mm

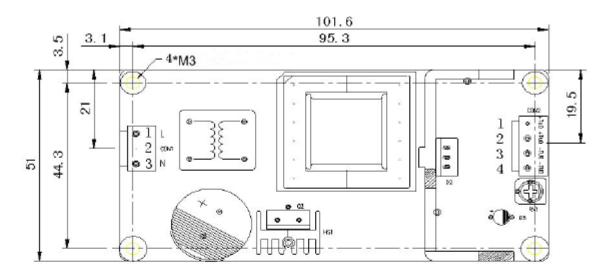

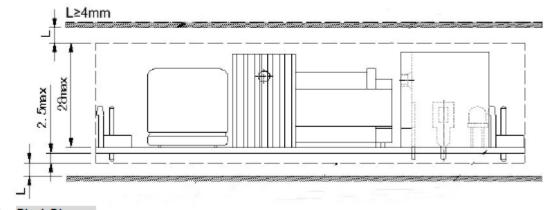

■ Block Diagram

