



SIRIUS CABLE-OPER. SWITCH METAL HOUSING,2X  
M20X1.5 2NC, LATCHES ACC. EN ISO 13850  
BUTTON RESET FOR CABLES UP TO TO 10M

Product designation		cable-operated switch
<b>General technical data:</b>		
Protection class IP		IP65
Equipment marking		S
<ul style="list-style-type: none"> <li>• acc. to DIN EN 61346-2</li> <li>• acc. to DIN EN 81346-2</li> </ul>		S
<b>Enclosure:</b>		
Material of the enclosure		metal
Product component		No
<ul style="list-style-type: none"> <li>• EMERGENCY STOP device</li> </ul>		
Color		grey
<ul style="list-style-type: none"> <li>• of top part of the enclosure</li> </ul>		
<b>Ambient conditions:</b>		
Ambient temperature		
<ul style="list-style-type: none"> <li>• during operation</li> </ul>	°C	-25 ... +70
<b>Installation/ mounting/ dimensions:</b>		
Mounting type		screw fixing
Height	mm	162
Width	mm	52
Depth	mm	53.5
<b>Certificates/ approvals:</b>		

General Product Approval	Declaration of Conformity	Shipping Approval
--------------------------	---------------------------	-------------------



Shipping Approval
-------------------



Further information
---------------------


**Information- and Downloadcenter (Catalogs, Brochures,...)**  
<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**  
<http://www.siemens.com/industrymall>

**Cax online generator**  
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE71201BH00>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**  
<http://support.automation.siemens.com/WW/view/en/3SE71201BH00/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**  
[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SE71201BH00&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE71201BH00&lang=en)

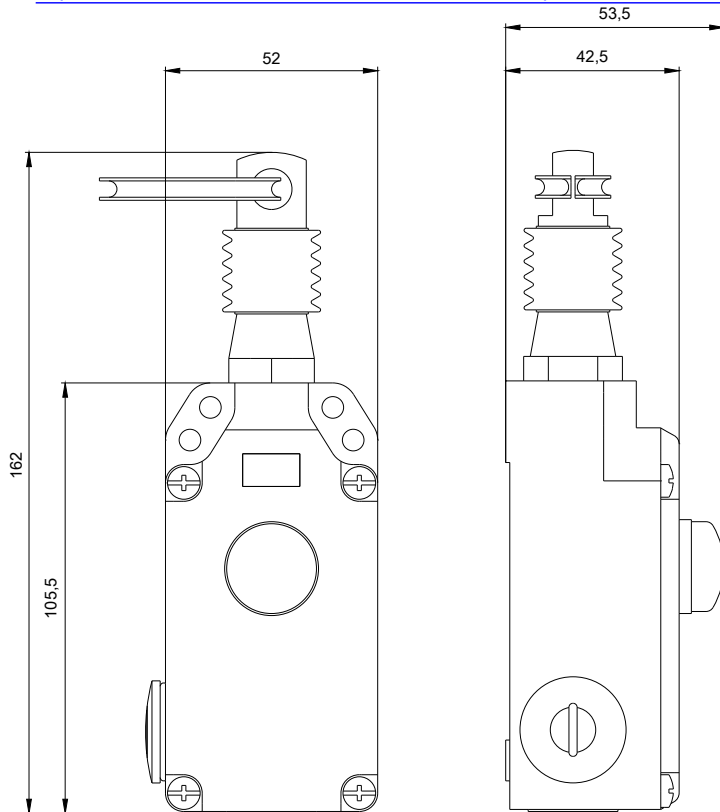

**last modified:**

09.03.2015