

**JST**

Crimp

**2.5mm**  
(.098") pitch



# XA CONNECTOR

*Disconnectable Crimp style connectors*

Emboss Tape



Radial Tape

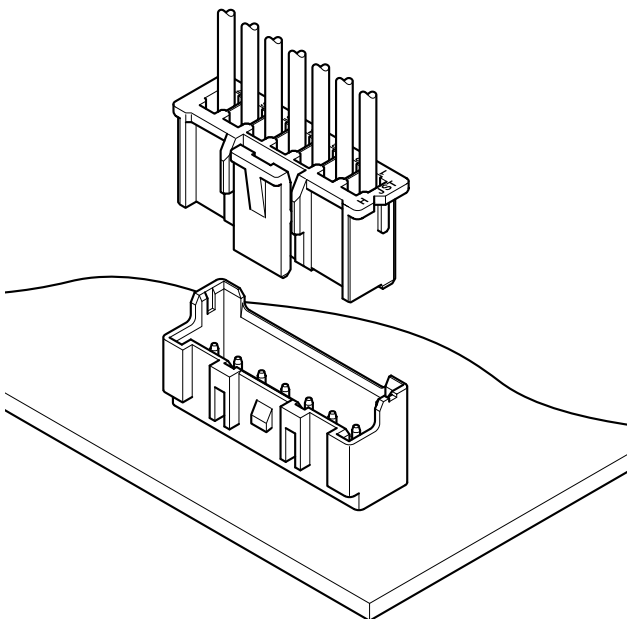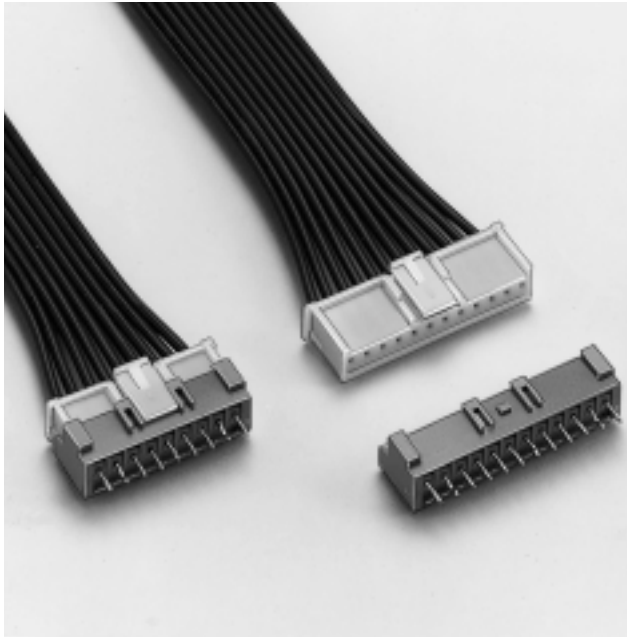

## Features

### • **Locking device**

The housing has a locking device to securely hold the header, preventing accidental disconnection because of external forces that might result from the routing of wires during assembly process or of vibration.

### • **Solder crack preventive material**

Header wafer is made of glass-filled PA66 nylon thus effective against the solder crack problem.

### • **Low insertion force**

Header pins are round and reflow-treated, which provides low insertion force.

### • **Insertion guide mechanism**

Header has housing insertion guides for easy and secure insertion.

### • **Applicable to automatic board mounting machine**

Radial taped or stick-mounted headers are also available for automatic component insertion machine.

### • **Polarizing boss**

Headers with polarizing bosses are also available.

## Specifications


- Current rating: 3A AC DC (AWG#20)
  - Voltage rating: 250V AC DC
  - Temperature range: -25°C to +85°C  
(including temperature rise in applying electrical current)
  - Relative humidity: 0 to 80%
  - Contact resistance: Initial value/10m Ω max.  
After environmental testing/20m Ω max.
  - Insulation resistance: 1,000M Ω min.
  - Withstanding voltage: AC 1,000V/minute
  - Applicable wire: AWG #28 to #20
  - Applicable PC board thickness: 1.6mm (.063")
- \* Contact JST for details.

## Standards

- Recognized E60389
- 1 Certified LR20812
- 2 R9851220

# XA CONNECTOR

## Contact

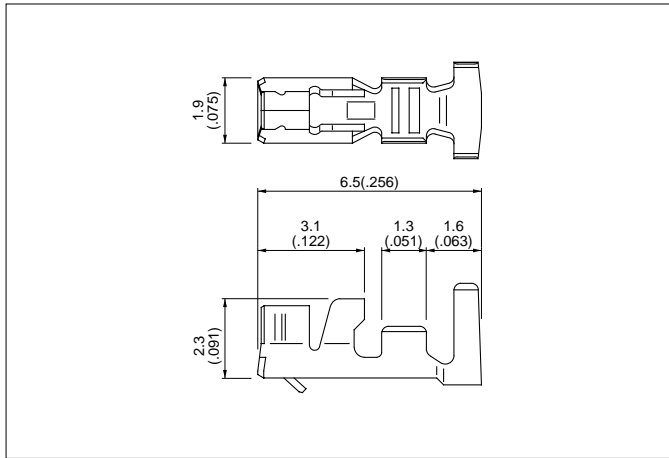


Model No.	Applicable wire			Q'ty / reel
	mm <sup>2</sup>	AWG#	Insulation O.D. mm(in.)	
<b>SXA-001T-P0.6</b>	0.08 to 0.33	28 to 22	1.2 to 1.9(.047 to .075)	8,000
<b>SXA- 01T-P0.6</b>	0.22 to 0.5	24 to 20	1.5 to 1.9(.059 to .075)	8,000
<b>SXA-001T-P0.6L</b>	0.13 to 0.33	26 to 22	1.3 to 1.7(.051 to .067)	8,000

### Material and Finish

Phosphor bronze, tin-plated

## Housing

### <Standard type>

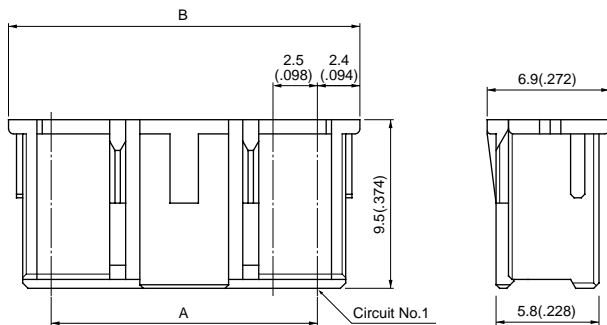


Cir- cuits	Model No.		Dimensions mm(in.)		Q'ty / bag	
	Standard type	Retainer mountable type	A	B	Standard type	Retainer mountable type
2	<b>XAP-02V-1</b>	<b>XARP-02V</b>	2.5( .098)	7.3( .287)	1,000	1,000
3	<b>XAP-03V-1</b>	<b>XARP-03V</b>	5.0( .197)	9.8( .386)	1,000	1,000
4	<b>XAP-04V-1</b>	<b>XARP-04V</b>	7.5( .295)	12.3( .484)	1,000	1,000
5	<b>XAP-05V-1</b>	<b>XARP-05V</b>	10.0( .394)	14.8( .583)	1,000	1,000
6	<b>XAP-06V-1</b>	<b>XARP-06V</b>	12.5( .492)	17.3( .681)	1,000	1,000
7	<b>XAP-07V-1</b>	<b>XARP-07V</b>	15.0( .591)	19.8( .780)	1,000	1,000
8	<b>XAP-08V-1</b>	<b>XARP-08V</b>	17.5( .689)	22.3( .878)	1,000	1,000
9	<b>XAP-09V-1</b>	<b>XARP-09V</b>	20.0( .787)	24.8( .976)	1,000	1,000
10	<b>XAP-10V-1</b>	<b>XARP-10V</b>	22.5( .886)	27.3(1.075)	1,000	1,000
11	<b>XAP-11V-1</b>	<b>XARP-11V</b>	25.0( .984)	29.8(1.173)	1,000	1,000
12	<b>XAP-12V-1</b>	<b>XARP-12V</b>	27.5(1.083)	32.3(1.272)	1,000	1,000
13	<b>XAP-13V-1</b>	<b>XARP-13V</b>	30.0(1.181)	34.8(1.370)	1,000	1,000
14	<b>XAP-14V-1</b>	<b>XARP-14V</b>	32.5(1.280)	37.3(1.469)	500	1,000
15	<b>XAP-15V-1</b>	<b>XARP-15V</b>	35.0(1.378)	39.8(1.567)	500	1,000
20	<b>XAP-20V-1</b>	—	47.5(1.870)	52.3(2.059)	500	—


### Material

Nylon 66, UL94V-0, natural (white)

### <Retainer mountable type>

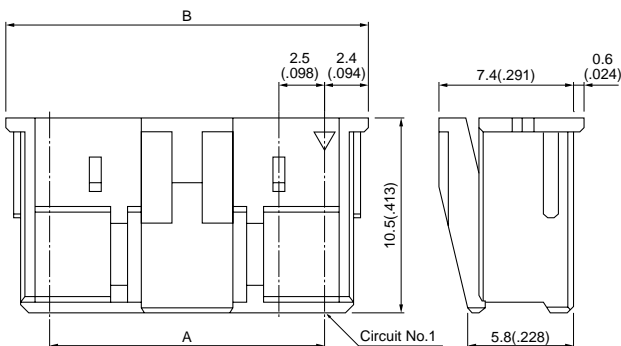

## Retainer

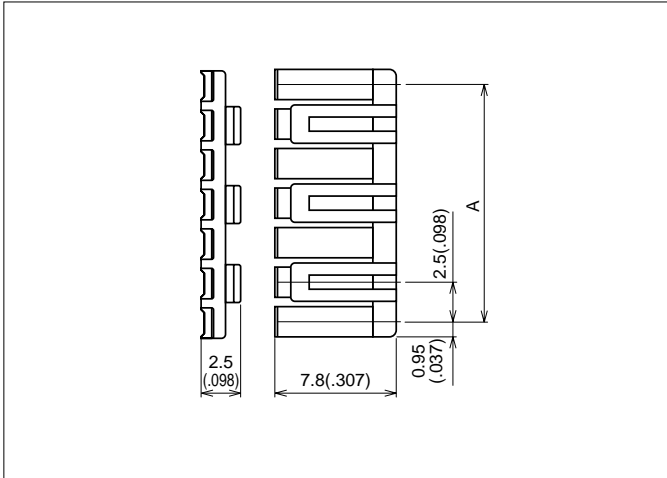


Circuits	Model No.	A	Q'ty / bag
2	<b>XMS-02V</b>	2.5( .098)	1,000
3	<b>XMS-03V</b>	5.0( .197)	1,000
4	<b>XMS-04V</b>	7.5( .295)	1,000
5	<b>XMS-05V</b>	10.0( .394)	1,000
6	<b>XMS-06V</b>	12.5( .492)	1,000
7	<b>XMS-07V</b>	15.0( .591)	1,000
8	<b>XMS-08V</b>	17.5( .689)	1,000
9	<b>XMS-09V</b>	20.0( .787)	1,000
10	<b>XMS-10V</b>	22.5( .886)	1,000
11	<b>XMS-11V</b>	25.0( .984)	1,000
12	<b>XMS-12V</b>	27.5(1.083)	1,000
13	<b>XMS-13V</b>	30.0(1.181)	1,000
14	<b>XMS-14V</b>	32.5(1.280)	1,000
15	<b>XMS-15V</b>	35.0(1.378)	1,000

### Material

Glass-filled nylon 66, UL94V-0, natural (ivory)

# XA CONNECTOR

## Through-hole type shrouded header

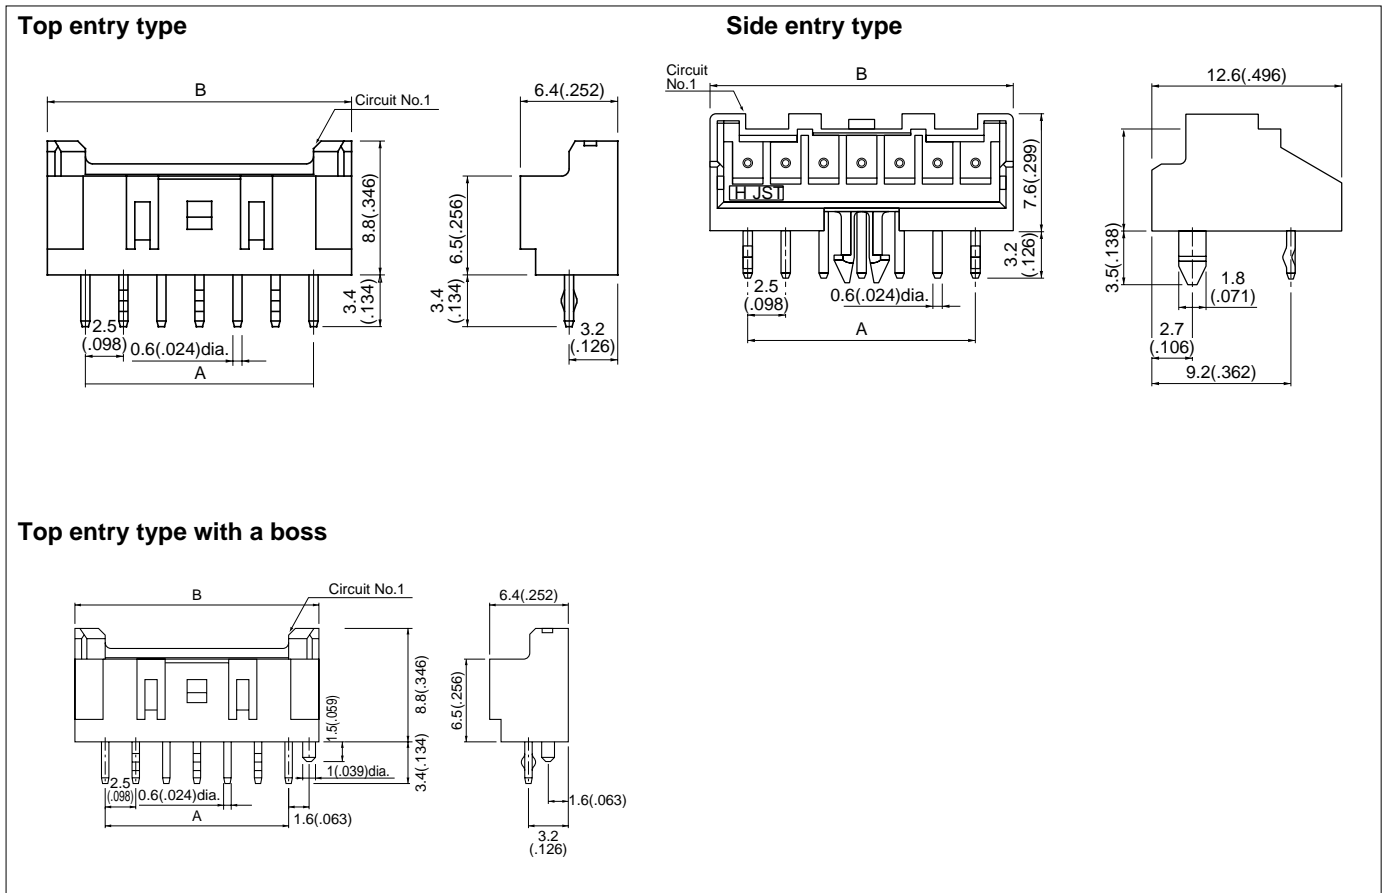


Circuits	Model No.			Dimensions mm(in.)			Q'ty / box		
	Top entry type		Side entry type	A	B	D	Top entry type		Side entry type
	Without a boss	With a boss					Without a boss	With a boss	
2	<b>B02B-XASK-1</b>	<b>B02B-XASK-1-A</b>	<b>S02B-XASS-1</b>	2.5( .098)	7.5( .295)	1.25(.049)	1,000	1,000	—
3	<b>B03B-XASK-1</b>	<b>B03B-XASK-1-A</b>	<b>S03B-XASK-1</b>	5.0( .197)	10.0( .394)	2.5 (.098)	400	400	250
4	<b>B04B-XASK-1</b>	<b>B04B-XASK-1-A</b>	<b>S04B-XASK-1</b>	7.5( .295)	12.5( .492)	3.75(.148)	400	400	200
5	<b>B05B-XASK-1</b>	<b>B05B-XASK-1-A</b>	<b>S05B-XASK-1</b>	10.0( .394)	15.0( .591)	5.0 (.197)	400	400	200
6	<b>B06B-XASK-1</b>	<b>B06B-XASK-1-A</b>	<b>S06B-XASK-1</b>	12.5( .492)	17.5( .689)	6.25(.246)	400	400	200
7	<b>B07B-XASK-1</b>	<b>B07B-XASK-1-A</b>	<b>S07B-XASK-1</b>	15.0( .591)	20.0( .787)	7.50(.295)	400	400	200
8	<b>B08B-XASK-1</b>	<b>B08B-XASK-1-A</b>	<b>S08B-XASK-1</b>	17.5( .689)	22.5( .886)	8.75(.344)	250	250	100
9	<b>B09B-XASK-1</b>	<b>B09B-XASK-1-A</b>	<b>S09B-XASK-1</b>	20.0( .787)	25.0( .984)	10.00(.394)	250	250	100
10	<b>B10B-XASK-1</b>	<b>B10B-XASK-1-A</b>	<b>S10B-XASK-1</b>	22.5( .886)	27.5(1.083)	11.25(.443)	250	250	100
11	<b>B11B-XASK-1</b>	<b>B11B-XASK-1-A</b>	<b>S11B-XASK-1</b>	25.0( .984)	30.0(1.181)	12.50(.492)	250	250	100
12	<b>B12B-XASK-1</b>	<b>B12B-XASK-1-A</b>	<b>S12B-XASK-1</b>	27.5(1.083)	32.5(1.280)	13.75(.541)	200	200	100
13	<b>B13B-XASK-1</b>	<b>B13B-XASK-1-A</b>	<b>S13B-XASK-1</b>	30.0(1.181)	35.0(1.378)	15.00(.591)	200	200	100
14	<b>B14B-XASK-1</b>	<b>B14B-XASK-1-A</b>	<b>S14B-XASK-1</b>	32.5(1.280)	37.5(1.476)	16.25(.640)	100	100	100
15	<b>B15B-XASK-1</b>	<b>B15B-XASK-1-A</b>	—	35.0(1.378)	40.0(1.575)	—	100	100	—
20	<b>B20B-XASK-1</b>	—	—	47.5(1.870)	52.5(2.067)	—	100	—	—

### Material and Finish

Pin: Copper alloy, Copper-undercoated, tin/lead plated  
 Wafer: Glass-filled nylon 66, UL94V-0, natural (ivory)

Note: Dimension D...See PC board layout.

## Through-hole type shrouded header on radial-tape

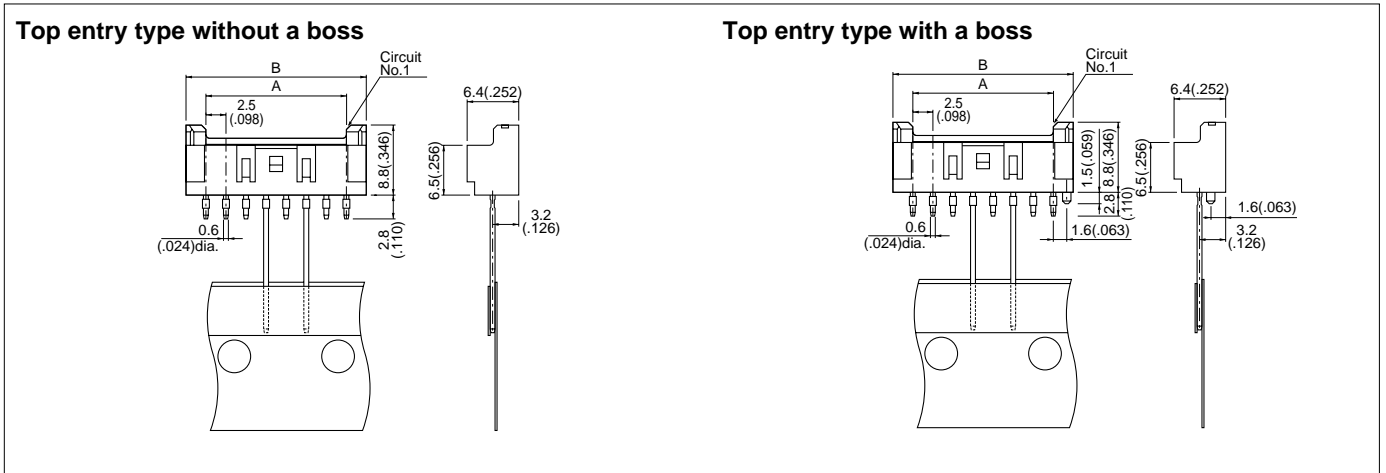


Circuits	Model No.		Dimensions mm(in.)		Q'ty / box
	Top entry type without a boss	Top entry type with a boss	A	B	
2	<b>B02B-XASS-1-T</b>	—	2.5(.098)	7.5(.295)	1,000
3	<b>B03B-XASS-1-T</b>	<b>B03B-XASS-1-A-T</b>	5.0(.197)	10.0(.394)	1,000
4	<b>B04B-XASS-1-T</b>	<b>B04B-XASS-1-A-T</b>	7.5(.295)	12.5(.492)	500
5	<b>B05B-XASS-1-T</b>	<b>B05B-XASS-1-A-T</b>	10.0(.394)	15.0(.591)	500
6	<b>B06B-XASS-1-T</b>	<b>B06B-XASS-1-A-T</b>	12.5(.492)	17.5(.689)	500
7	<b>B07B-XASS-1-T</b>	<b>B07B-XASS-1-A-T</b>	15.0(.591)	20.0(.787)	500
8	<b>B08B-XASS-1-T</b>	<b>B08B-XASS-1-A-T</b>	17.5(.689)	22.5(.886)	500

### Material and Finish


Pin: Copper alloy, Copper-undercoated, tin/lead plated  
 Wafer: Glass-filled nylon 66, UL94V-0, natural (ivory)

## Taping specifications of through-hole type shrouded header

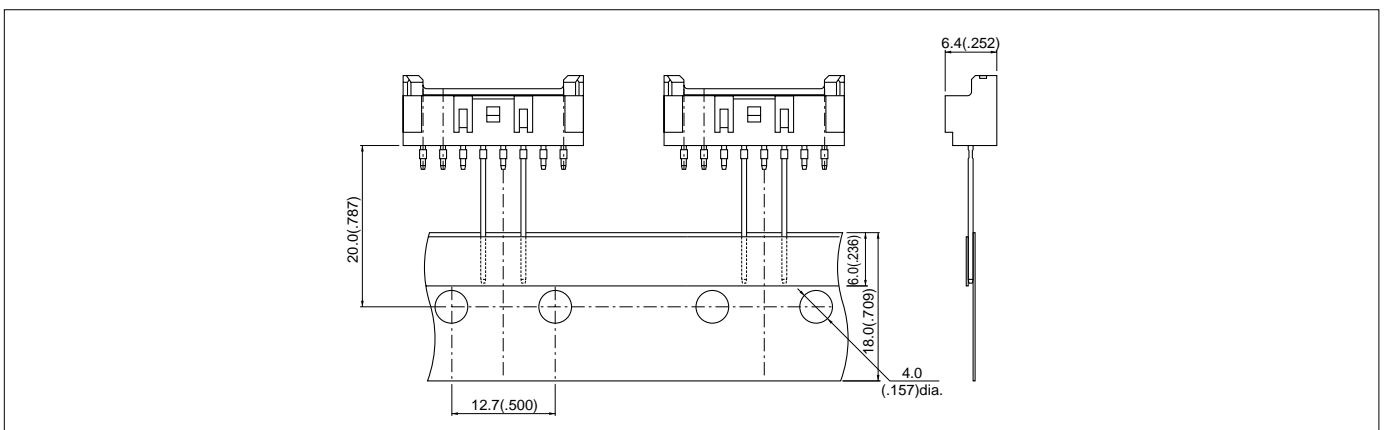

# XA CONNECTOR


## Packaging specifications of through-hole type shrouded header

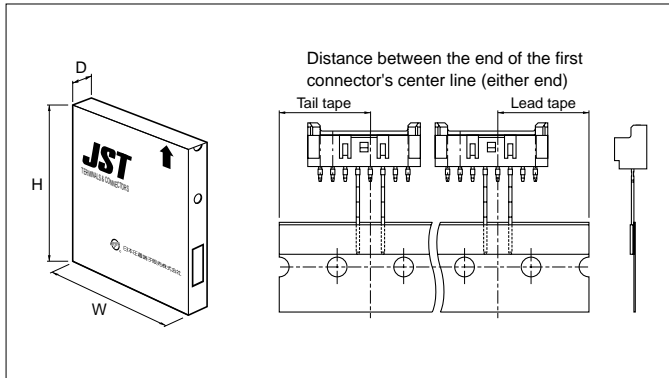

Package type	Flat pack (zigzag folded)
Distance between folds	24 indexing holes per fold (304.8mm/12")
Box size	(316 X 45 X 330mm) 12.4"(W) X 1.8"(D) X 13.0"(H)
Distance between the end of the tape and the first connector's center line (either end)	19.05mm(.750")

Products of different packaging specifications are also available.  
Contact JST for details.


## Through-hole type PC board layout (viewed from component side) and Assembly layout

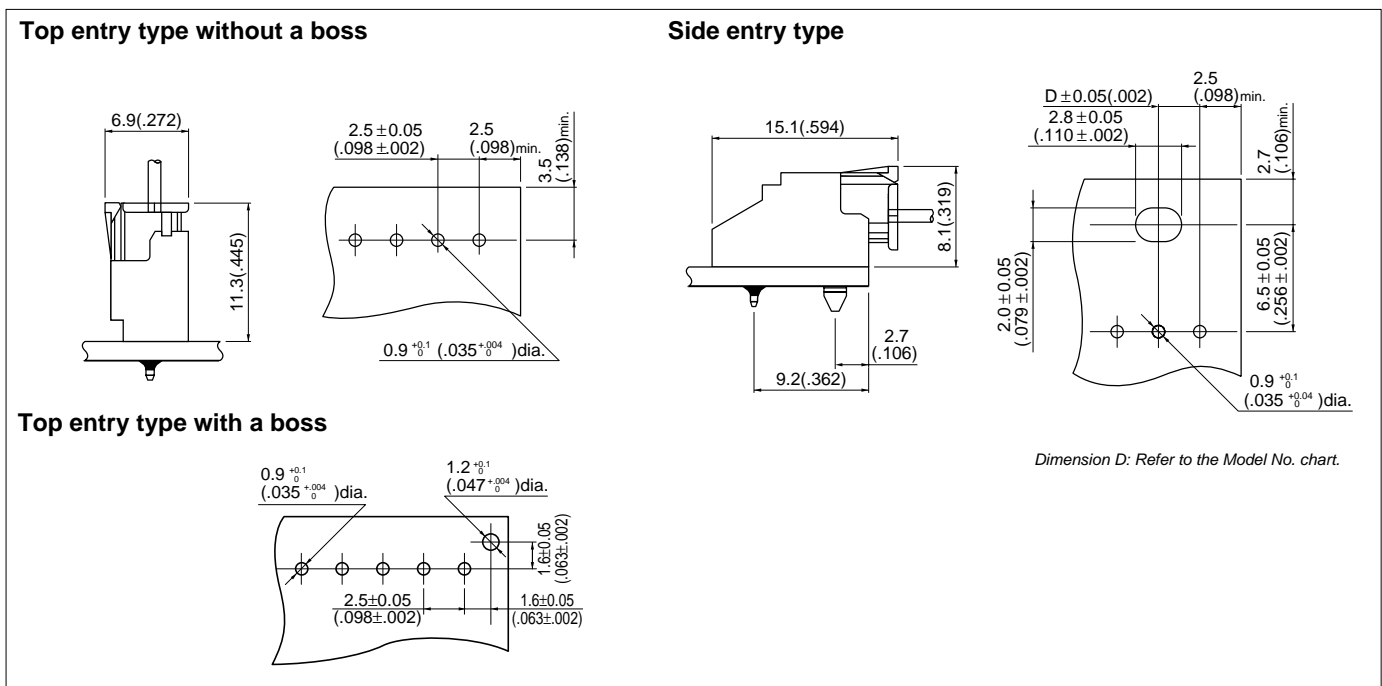

### Note:

- Tolerances are non-Cumulative: ±0.05mm(±.002") for all centers.
- Hole dimensions differ according to the kind of PC board and piercing method.  
The dimensions above should serve as a guide line. Contact JST for details.

## SMT type shrouded header

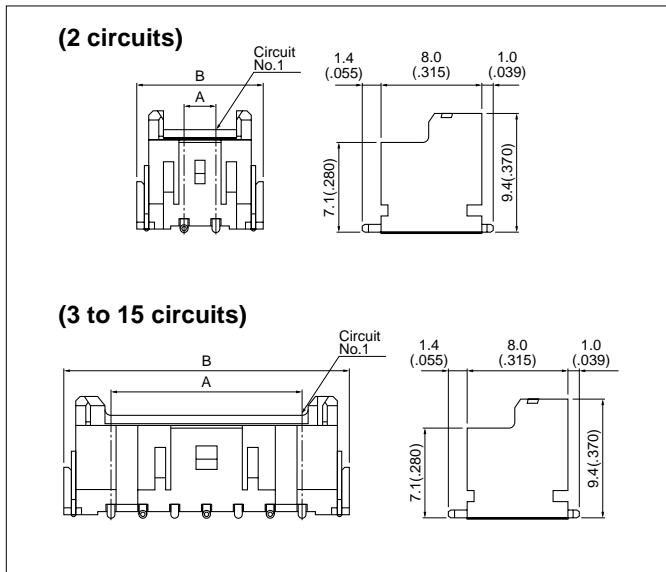


Circuits	Model No.	Dimensions mm(in.)		Q'ty / reel
		Top entry type	A	
2	<b>BM02B-XASS-TF</b>	2.5( .098)	10.0( .394)	500
3	<b>BM03B-XASS-TF</b>	5.0( .197)	12.5( .492)	500
5	<b>BM05B-XASS-TF</b>	10.0( .394)	17.5( .689)	500
6	<b>BM06B-XASS-TF</b>	12.5( .492)	20.0( .787)	500
7	<b>BM07B-XASS-TF</b>	15.0( .591)	22.5( .886)	500
8	<b>BM08B-XASS-TF</b>	17.5( .689)	25.0( .984)	500
9	<b>BM09B-XASS-TF</b>	20.0( .787)	27.5(1.083)	500
12	<b>BM12B-XASS-TF</b>	27.5(1.083)	35.0(1.378)	500
13	<b>BM13B-XASS-TF</b>	30.0(1.181)	37.5(1.476)	500
15	<b>BM15B-XASS-TF</b>	35.0(1.378)	42.5(1.673)	500

### Material and Finish

Pin: Copper alloy, copper-undercoated, tin/lead-plated  
 Wafer: Polyamide resin, UL94V-0, natural (ivory)  
 Solder tab: Brass, copper-undercoated, tin/lead-plated

Note: The products listed above are supplied on embossed tape.

## Taping specifications of SMT type shrouded headers

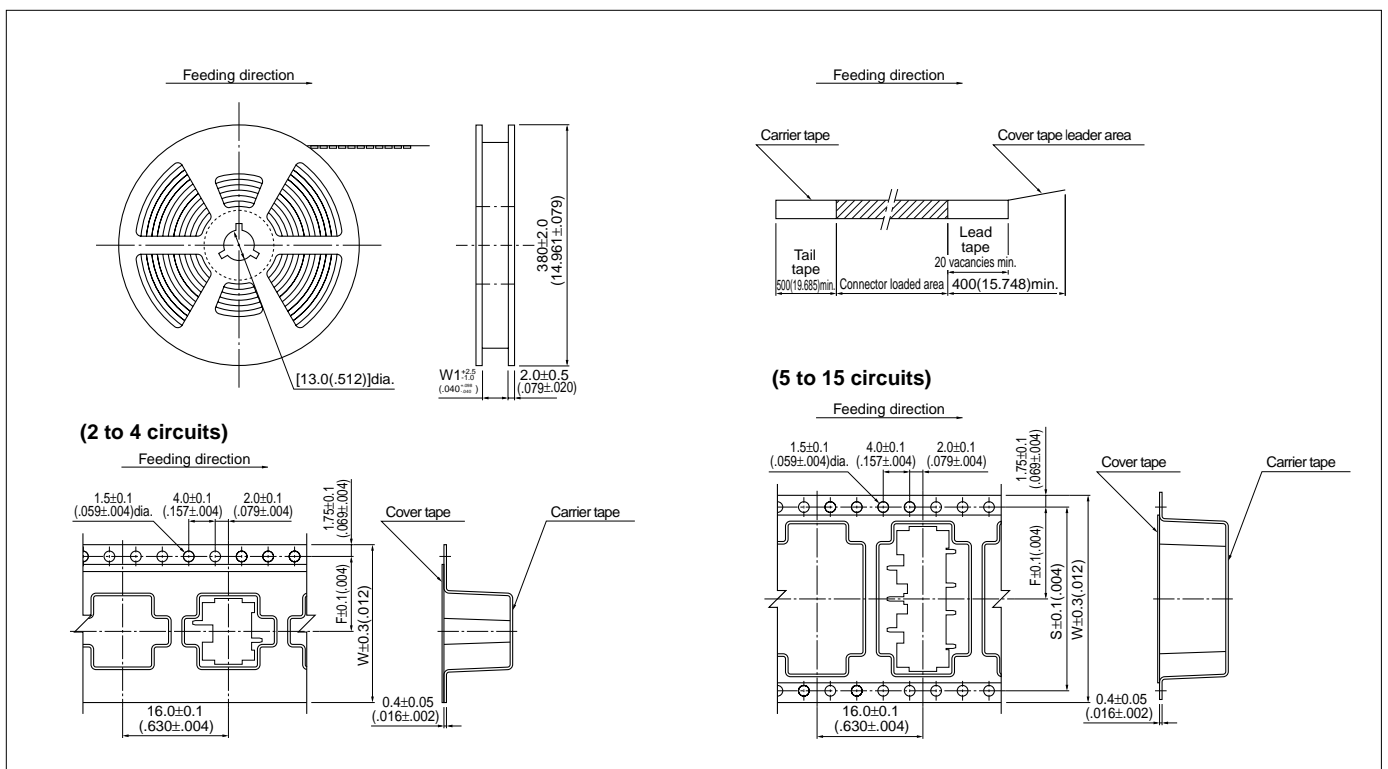


- Note:
- Specifications conform to JIS C 0806. The tape width, connector recess dimensions, etc. are determined by the number of circuits and external shape of the connector to be loaded.
  - Specifications are subject to change without prior notice.

Circuits	Taping dimensions mm(in.)			Reel dimensions mm(in.)	Q'ty / reel
	F	S	W		
2 to 3	11.5( .453)	—	24.0( .945)	25.5(1.004)	500
5	14.2( .559)	28.4(1.118)	32.0(1.260)	33.5(1.319)	500
6 to 10	20.2( .795)	40.4(1.591)	44.0(1.732)	45.5(1.791)	500
12 to 15	26.2(1.031)	52.4(2.063)	56.0(2.205)	57.5(2.264)	500

# XA CONNECTOR

## SMT type PC board layout (viewed from component side) and Assembly layout

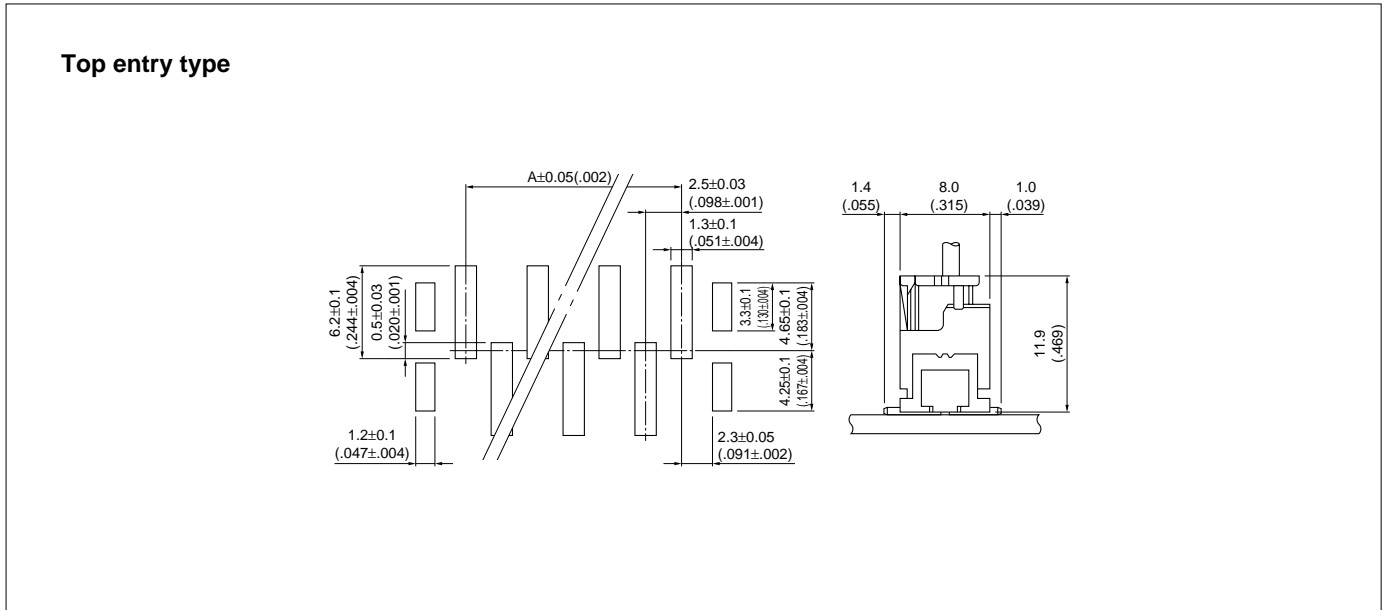

**Note:**

1. Tolerances are non-Cumulative: ±0.05mm(±.002") for all centers.
2. Hole dimensions differ according to the kind of PC board and piercing method.  
The dimensions above should serve as a guide line. Contact JST for details.