



SAW Components

SAW Duplexer

LTE Band 13

Series/type:	B8511
Ordering code:	B39781B8511P810
Date:	April 03, 2013
Version:	2.0


© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.




Data Sheet

Application


- Low-loss SAW duplexer for mobile telephone LTE Band 13 systems
- Low insertion attenuation
- High isolation
- Usable passband 10 MHz
- Single-ended to balanced transformation in Antenna-Rx path
- Impedance transformation 50 Ω to 100 Ω in Antenna-Rx path
- Very small size and low height

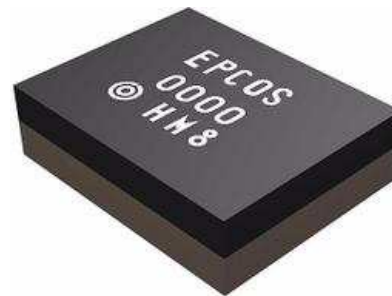
Features

- Package size 2.0 * 1.6 * 0.47 mm³
- RoHS compatible
- Package for **Surface Mount Technology (SMT)**
- Ni, Au-plated terminals
- **Electrostatic Sensitive Device (ESD)**
- Moisture Sensitivity Level 3

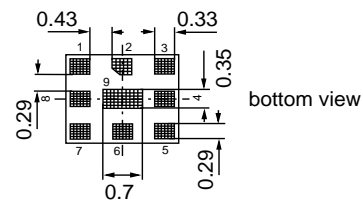
Pin configuration

- 3 Tx input
- 1, 8 Rx output (balanced)
- 6 Antenna
- 2, 4, 5, 7, 9 To be grounded



Characteristics

Temperature range for specification:	T = -30 °C to +85 °C
TX terminating impedance:	Z _{Tx} = 50 Ω
ANT terminating impedance:	Z _{Ant} = 50 Ω 15 nH
RX terminating impedance:	Z _{Rx} = 100 Ω (balanced)

Characteristics Tx-Antenna		min.	typ. @ 25 °C	max.	
Center frequency	f _c	—	782.0	—	MHz
Maximum insertion attenuation	α	—	1.8	2.5	dB
	777.0 ... 787.0 MHz				
Amplitude ripple (p-p)	Δα	—	0.6	1.5	dB
	777.0 ... 787.0 MHz				
Error Vector Magnitude @ 25°C					
	@ f _{Carrier} 779.4 ... 784.6 MHz EVM ¹⁾	—	2.0	2.7	%
Error Vector Magnitude					
	@ f _{Carrier} 779.4 ... 784.6 MHz EVM ²⁾	—	2.0	4.0	%
Input VSWR (Tx port)					
	777.0 ... 787.0 MHz	—	1.4	2.0	
Output VSWR (Ant Port)					
	777.0 ... 787.0 MHz	—	1.5	2.0	

1) Error Vector Magnitude (EVM) based on definition in 3GPP TS 25.141

2) Error Vector Magnitude (EVM) based on definition in 3GPP TS 25.141

Characteristics

Temperature range for specification:	T = -30 °C to +85 °C
TX terminating impedance:	Z _{Tx} = 50 Ω
ANT terminating impedance:	Z _{Ant} = 50 Ω 15 nH
RX terminating impedance:	Z _{Rx} = 100 Ω (balanced)

Characteristics Tx-Antenna				min.	typ. @ 25 °C	max.	
Absolute attenuation α							
10.0	...	716.0	MHz	35	43	—	dB
716.0	...	728.0	MHz	40	46	—	dB
728.0	...	746.0	MHz	40	47	—	dB
746.0	...	756.0	MHz	50	65	—	dB
758.0	...	767.0	MHz	35	46	—	dB
767.0	...	768.0	MHz	26	46	—	dB
768.0	...	769.0	MHz	12	46	—	dB
769.0	...	770.0	MHz	6	35	—	dB
770.0	...	771.0	MHz	3	22	—	dB
771.0	...	772.0	MHz	2.5	11	—	dB
808.0	...	869.0	MHz	20	30	—	dB
869.0	...	894.0	MHz	35	41	—	dB
1554.0	...	1565.0	MHz	45	51	—	dB
1565.0	...	1607.0	MHz	45	51	—	dB
1805.0	...	2170.0	MHz	35	54	—	dB
2331.0	...	2361.0	MHz	35	46	—	dB
2400.0	...	2484.0	MHz	40	50	—	dB
3108.0	...	3148.0	MHz	30	42	—	dB
3885.0	...	3935.0	MHz	20	28	—	dB
4662.0	...	4722.0	MHz	10	17	—	dB
5160.0	...	5845.0	MHz	10	16	—	dB

Data Sheet

Characteristics

Temperature range for specification:	T = -30 °C to +85 °C
TX terminating impedance:	Z _{Tx} = 50 Ω
ANT terminating impedance:	Z _{Ant} = 50 Ω 15 nH
RX terminating impedance:	Z _{Rx} = 100 Ω (balanced)

Characteristics Antenna-Rx		min.	typ. @ 25 °C	max.	
Center frequency	f _c	—	751.0	—	MHz
Maximum insertion attenuation	α				
746.0 ... 756.0 MHz		—	1.6	2.2	dB
Amplitude ripple (p-p)	Δα				
746.0... 756.0 MHz		—	0.4	1.2	dB
Input VSWR (Ant port)					
746.0 ... 756.0 MHz		—	1.4	2.0	
Output VSWR (Rx Port)					
747.0 ... 756.0 MHz		—	1.5	2.0	
Common mode rejection ratio					
746.0 ... 756.0 MHz		25	31	—	dB
Absolute attenuation	α				
10.0 ... 650.0 MHz		50	66	—	dB
650.0 ... 730.0 MHz		35	44	—	dB
730.0 ... 736.0 MHz		30	43	—	dB
777.0 ... 787.0 MHz		55	61	—	dB
793.0 ... 805.0 MHz		40	53	—	dB
805.0 ... 2400.0 MHz		40	50	—	dB
2400.0 ... 2484.0 MHz		40	57	—	dB
2484.0 ... 4500.0 MHz		40	54	—	dB
4500.0 ... 6000.0 MHz		35	42	—	dB

SAW Components
B8511
SAW Duplexer
782.0 / 751.0 MHz
Data Sheet

Characteristics

Temperature range for specification:	T = -30 °C to +85 °C
TX terminating impedance:	Z _{Tx} = 50 Ω
ANT terminating impedance:	Z _{Ant} = 50 Ω 15 nH
RX terminating impedance:	Z _{Rx} = 100 Ω (balanced)

Characteristics Tx-Rx				min.	typ. @ 25 °C	max.	
Attenuation							
			α				
	746.5 ... 752.0		MHz	54	59	—	dB
	752.0 ... 755.5		MHz	54	59	—	dB
	777.0 ... 787.0		MHz	58	63	—	dB
	1552.0 ... 1574.0		MHz	30	74	—	dB
	2328.0 ... 2361.0		MHz	30	67	—	dB
	3104.0 ... 3148.0		MHz	30	64	—	dB
Common mode attenuation							
			α				
	777.0 ... 787.0		MHz	60	65	—	dB

Maximum Ratings

Storage temperature range	T _{stg}	-40/+85	°C	
DC voltage	V _{DC}	5 ¹⁾	V	
ESD voltage	V _{ESD}	100 ²⁾	V	Machine Model
ESD voltage	V _{ESD}	200 ³⁾	V	Human Body Model
ESD voltage	V _{ESD}	600 ⁴⁾	V	Charged Device Model
Input power at Tx Port				
777.0 ... 787.0 MHz	P _{in}	29	dBm	} CW 50 °C, 5,000h
elsewhere	P _{in}	10	dBm	


1) 168h Damp Heat Steady State acc. to IEC 60068-2-67 Cy.

2) Acc. to FESD22-A115B (MM - Machine Model), 10 negative & 10 positive pulses.


3) Acc. to JESD22-A114F (HBM - Human Body Level), 1 negative & 1 positive pulses.

4) Acc. to JESD22-C101C (CDM - Fiel Inducted Charged Device Model), 3 negative & 3 positive pulses.

Frequency Response TX-ANT

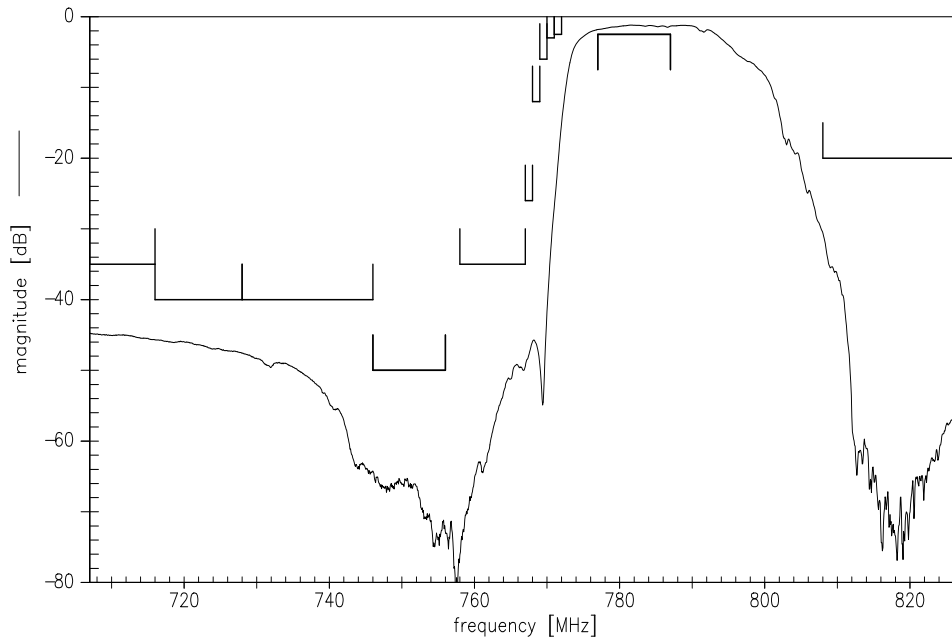


Frequency Response TX-ANT

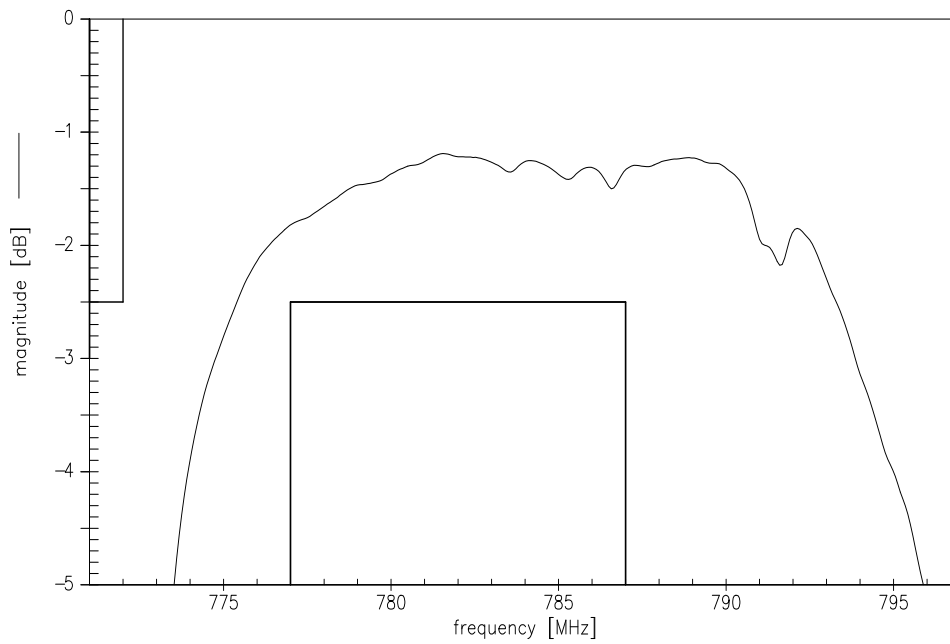


Frequency Response RX-ANT


Please read *cautions and warnings* and *important notes* at the end of this document.

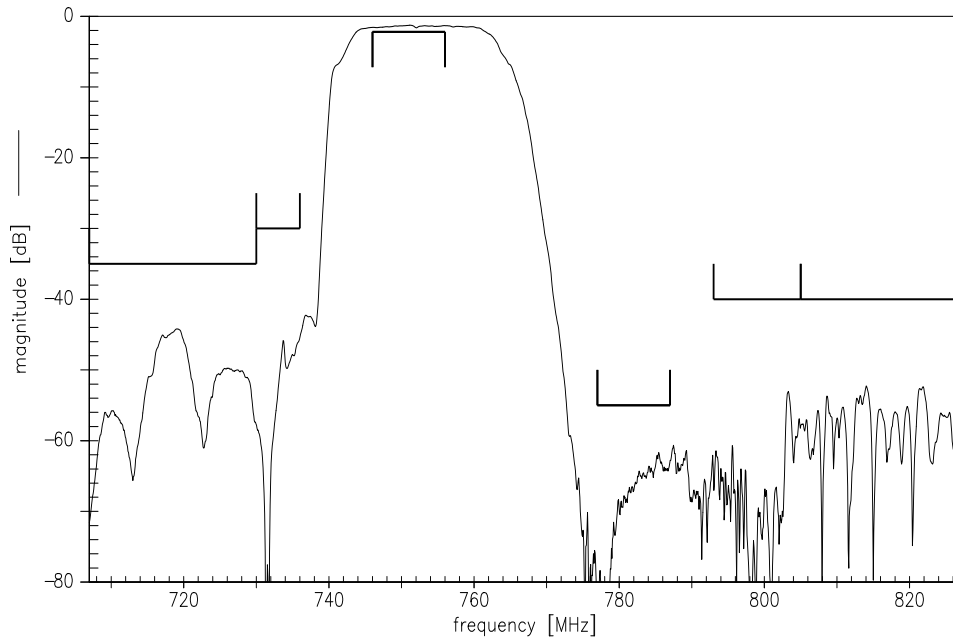


Frequency Response RX-ANT

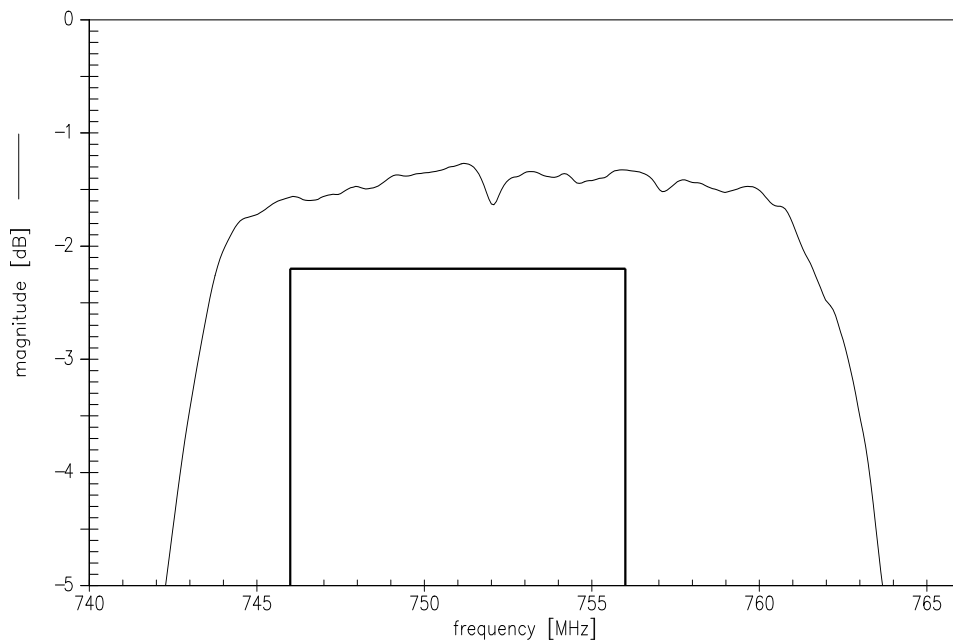


Frequency Response ANT-TX

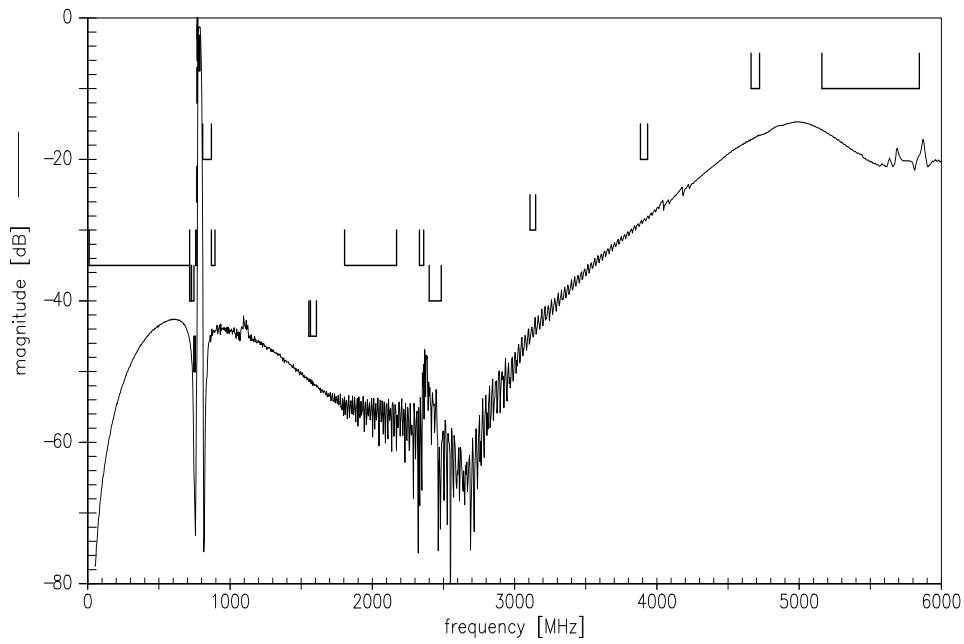


Frequency Response ANT-RX

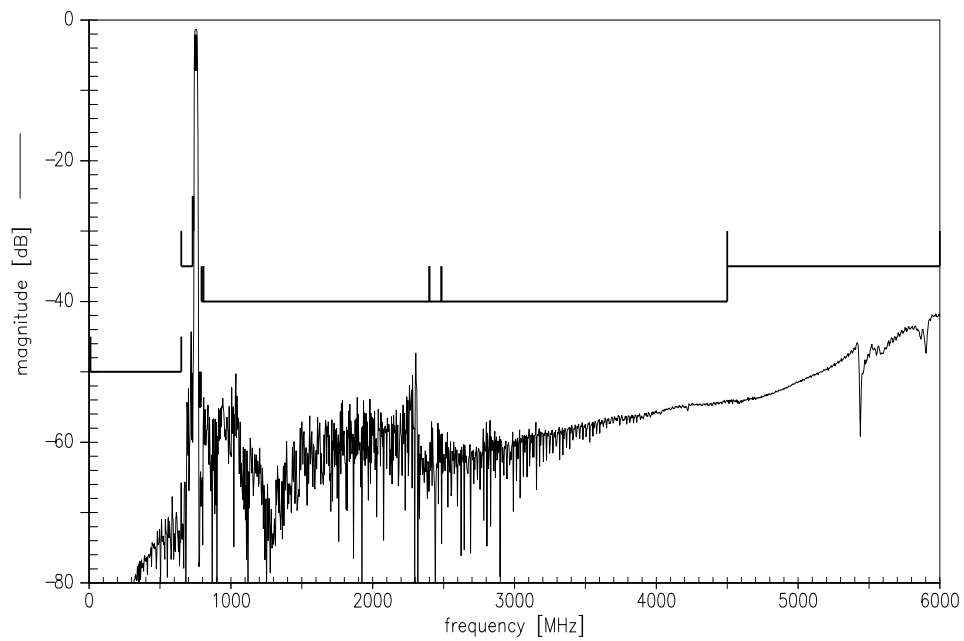



Frequency Response TX-RX (Isolation)

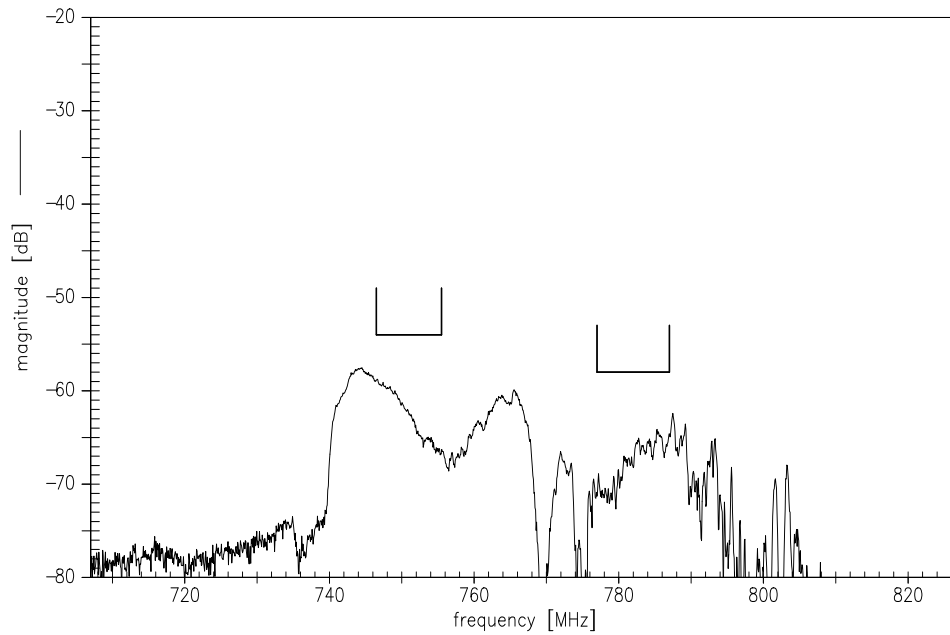



Frequency Response Common Mode Isolation

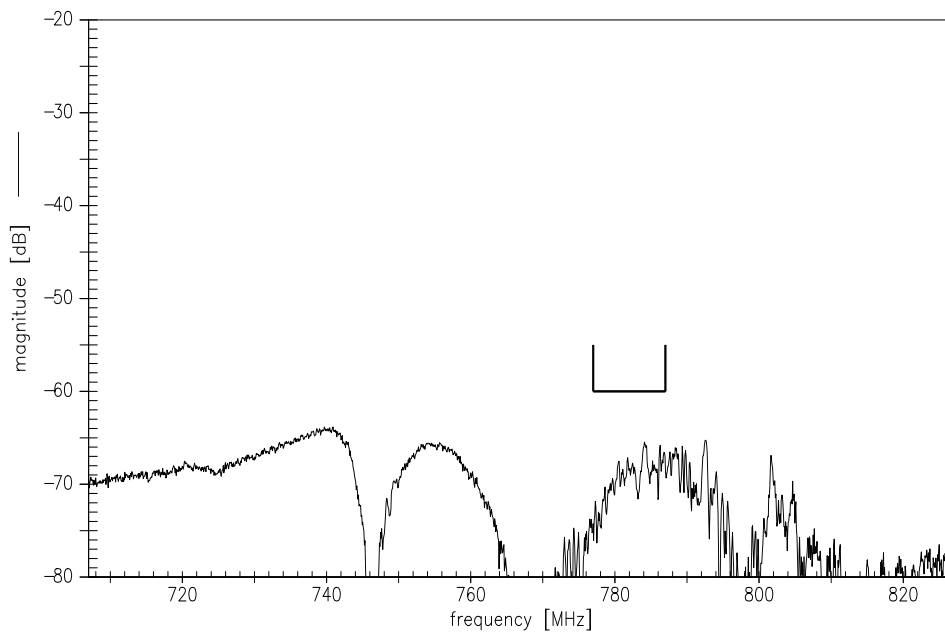



S11 VSWR (TX)

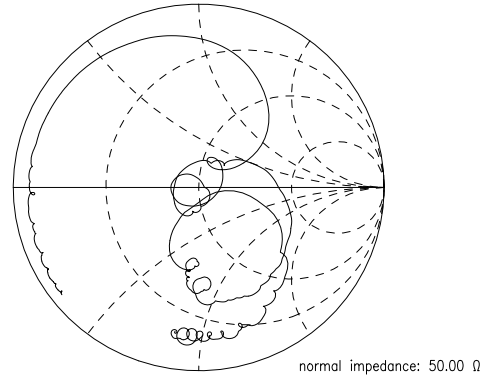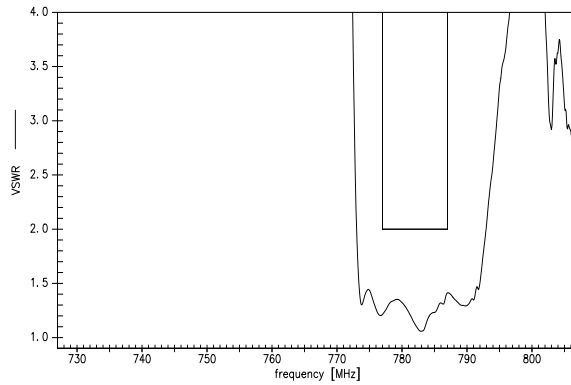

S22 VSWR (ANT)

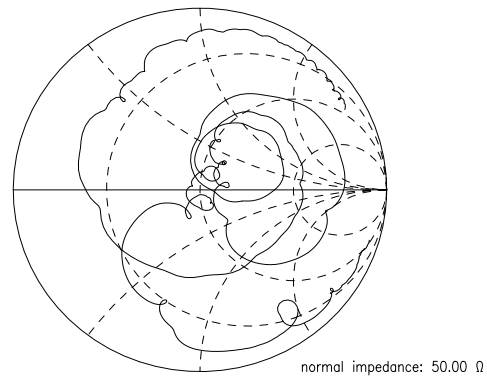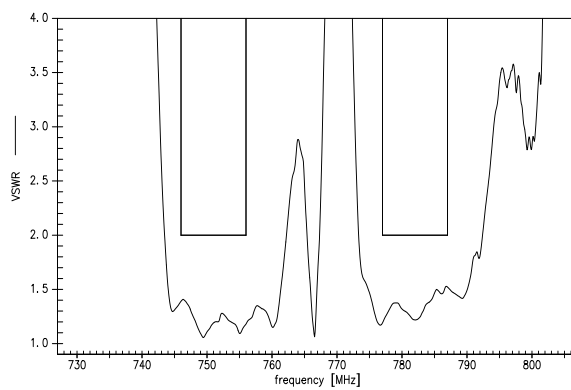

S33 VSWR (RX)

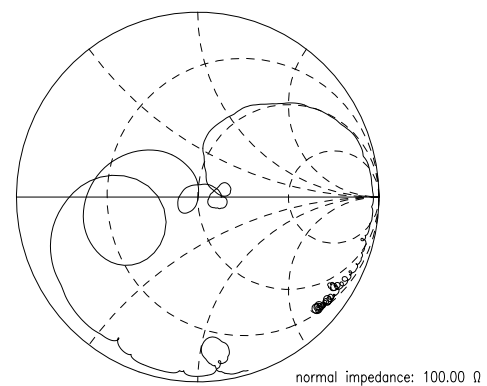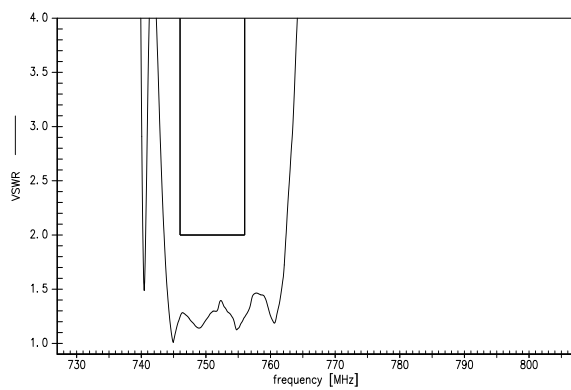

SAW Components	B8511
SAW Duplexer	782.0 / 751.0 MHz

Data Sheet



References

Type	B8511
Ordering code	B39781B8511P810
Marking and package	C61157-A8-A77
Packaging	F61074-V8247-Z000
Date codes	L_1126
S-parameters	B8511_NB_UN.s4p, B8511_WB_UN.s4p See file header for port/pin assignment table.
Soldering profile	S_6001
RoHS compatible	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8 th , 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.
Moldability	Before using in overmolding environment, please contact your EPCOS sales office.
Matching coils	See Inductor pdf-catalog http://www.tdk.co.jp/tefe02/coil.htm#aname1 and Data Library for circuit simulation http://www.tdk.co.jp/etvcl/index.htm

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com.

Published by EPCOS AG
Systems, Acoustics, Waves Business Group
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2013. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Please read *cautions and warnings and important notes* at the end of this document.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.
We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.