Datenblatt - Fiche technique - Data sheet

26.99.0329

VALUE Kat. 5e 19"-Patchpanel, 24P, geschirmt, lichtgrau

VALUE Panneau de brassage Cat.5e, 24P, blindé, gris clair

VALUE Cat.5e 19" Patch Panel, 24 Ports, STP, light grey

rotronic

Item no.: 26.99.0329

VALUE Cat. 5e 19“ Patch Panel, 24 Ports, STP, light grey

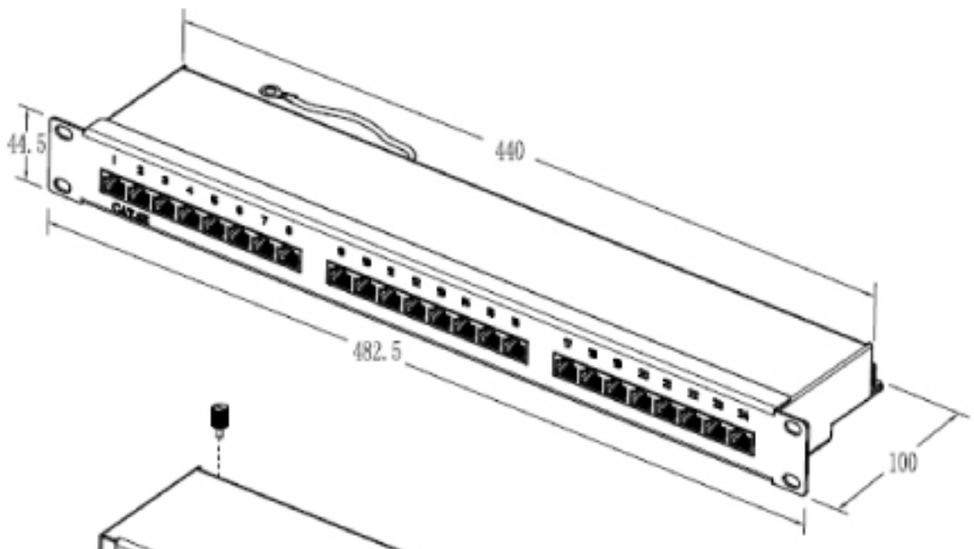

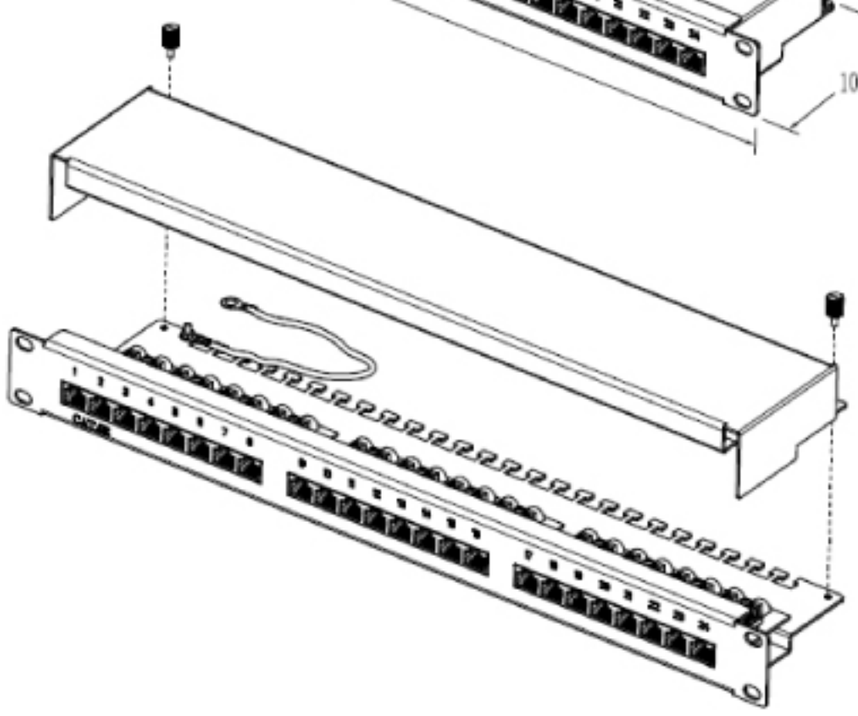

Performance:

Meet or Exceed Cat.5E EIA/TIA 568B.2 Standard.

Materials:

Bottom Panel : 1.5mm thickness Metallic Panel(SECC)/RAL7035
Upper Panel Cover : 1.0mm thickness Metallic Panel(SECC)/RAL7035
RJ45 Jack Shielded Case: 0.25mm thickness Brass with Ni Plated
RJ45 Jack Housing-Fireproof PBT UL94V-0
RJ45 Jack Insert: Housing-Fireproof PBT UL94V-0
Contact-8P8C Phosphor bronze with 3 to 50U" gold plated
PCB : FR-4/1.6mm UL94V-0
IDC Body : Fireproof PC/ABS UL94V-0/With Colour Coded Printing T568A/B
IDC Pin : Phosphor bronze & Tinned
IDC Terminal: For 22-26 AWG Cable

Electrical Specifications:

Insulation Resistance: 500M ohms (min.)
Contact Resistance: 20m ohms (max.)
Current Rating : 1.5 Amps
DC Resistance: 0.1 ohms(max.)
Withstanding Voltage : 1000 VAC RMS @ 60Hz/ 1 min

Mechanical Specifications:

IDC Punch Down Cycle : Over 25 Cycles (min.)
RJ45 Jack Insertion Cycle : Over 200 Cycles (min.)

Accessory:

1.M3 Screw Set, For Pre-Assembled Ground Wire
2.Cable Tie(60x2.5mm)x24Pcs
3.Instruction Sheet
4.Knurled Screws