

Sylveo LED - Extra Extra Large

Sylveo LED 30000LM WIDE 3K
0049128



Product features

- Exterior LED Floodlight, comes complete with a 1000mm cable and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 3000K, Non-dimming, 30813lm, 301W, 102lm/W, 8400mA, CRI70, 52° beam angle, 50000hrs, (LxWxD) 98x648x392mm



PRODUCT OVERVIEW

Product name	Sylveo LED 30000LM WIDE 3K
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Fixture rating	Enclosed
Environment	Internal/External
General application	Logistics & Industry
ETIM Class	EC001744
E-number FI	4579186
E-number SE	7763379
Warranty	5 years
Fixture luminous flux (lm)	30813
Luminaire efficacy (lm/W)	102
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	70
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	52
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	301.2
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9006 - Aluminium
IP rating	IP66
IK rating	IK08
Product EAN number	5410288491288

Sylveo LED - Extra Extra Large

Sylveo LED 30000LM WIDE 3K
0049128

DATA TABLE

General data

Product name	Sylveo LED 30000LM WIDE 3K
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Fixture rating	Enclosed
Environment	Internal/External
General application	Logistics & Industry
Operating temperature range (°C)	-40°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4579186
E-number SE	7763379
Warranty	5 years

Optical data

Fixture luminous flux (lm)	30813
Luminaire efficacy (lm/W)	102
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	70
Colour Variation Initial (SDCM)	SDCM6
Adjustable chromaticity	N
Beam Angle (°)	52
Glare control	< 19
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	301.2
Current (A)	1.304
Mains voltage (V)	100-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Transformer required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	8400
Inrush Current (A)	60
Inrush Duration (µs)	20
Glow Wire Test (°C)	650

Sylveo LED - Extra Extra Large

Sylveo LED 30000LM WIDE 3K
0049128

Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	2
Max. Luminaires per 13A C Breaker	2
Max. Luminaires per 16A C Breaker	3
Max. Luminaires per 20A C Breaker	4
Max. Luminaires per 10A B Breaker	1
Max. Luminaires per 13A B Breaker	1
Max. Luminaires per 16A B Breaker	2
Max. Luminaires per 20A B Breaker	2
Mains surge immunity (differential mode - > L-N) (kV)	4
Mains surge immunity (common mode -> L/N - GND) (kV)	6

Lifetime data

Lifespan L70 B50	50000
Lifespan L80 B50	49000

Physical data

Housing colour	RAL 9006 - Aluminium
IP rating	IP66
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	Glass
Nominal Product Length (mm)	648
Nominal Product Width (mm)	98
Nominal Product Height (mm)	392
Weight (kg)	15.868
Wind Area (m ²)	0.236

Packaging





Single packaging type	Carton
Product EAN number	5410288491288
Packaging single length / height (cm)	52.7
Packaging single width (cm)	69.8
Packaging single depth (cm)	16.7
DUN14 (outer)	05410288491288
Units per outer package	1
Packaging outer length / height (cm)	52.7
Packaging outer width (cm)	69.8
Packaging outer depth (cm)	16.7

Safety data

Optimal operating condition (°C)	-40-45
----------------------------------	--------

Sylveo LED - Extra Extra Large Sylveo LED 3000LM WIDE 3K 0049128

PHOTOMETRY

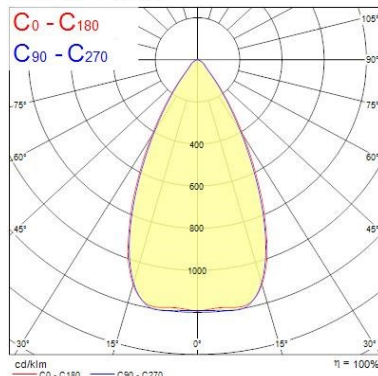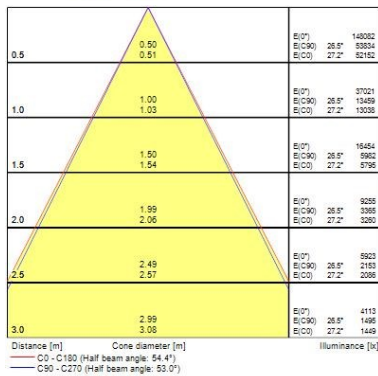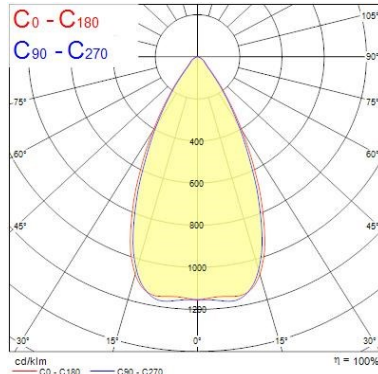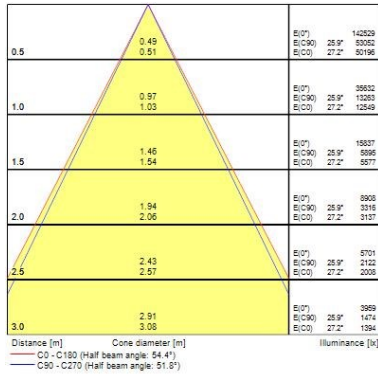

TECHNICAL DRAWINGS

