

## T5 FHO Luxline Plus

24W/T5/830 FHO  
0002772



### Product features



## PRODUCT OVERVIEW

Product name	24W/T5/830 FHO
Technology	Fluorescent
Watt (Rated) (W)	24
Lamp shape	Tube, double-ended
Type	T5 FHO Luxline Plus
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944323
E-number SE	8356534
E-number Norway	3800908
Luminous flux (lm)	1750
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	74
Colour temperature (K)	3000
Light colour	Warm White
Colour Code	830
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	24.00
Product Voltage (V)	75
Dimmable	Yes
Average life (Nominal) (h)	24000
Product EAN number	5410288027722

## DATA TABLE

### General data

Product name	24W/T5/830 FHO
Technology	Fluorescent
Watt (Rated) (W)	24
Lamp shape	Tube, double-ended

## T5 FHO Luxline Plus

24W/T5/830 FHO  
0002772

Type	T5 FHO Luxline Plus
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944323
E-number SE	8356534
E-number Norway	3800908

### Optical data

Luminous flux (lm)	1750
Luminous flux (Rated) (lm)	1750
Luminous flux (Nominal) at 35°C (lm)	1950
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	74
Ambient temperature for maximum luminous flux (°C)	35
Colour temperature (K)	3000
Light colour	Warm White
Colour Code	830
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.97
Rated lumen maint. factor (%) at 4000 h 50Hz	0.95
Rated lumen maint. factor (%) at 6000 h 50Hz	0.93
Rated lumen maint. factor (%) at 8000 h 50Hz	0.92
Rated lumen maint. factor (%) at 12000 h 50Hz	0.91
Rated lumen maint. factor (%) at 16000 h 50Hz	0.90
Rated lumen maint. factor (%) at 20000 h 50Hz	0.88

### Electrical data

Wattage (W)	24.00
Watt (Rated) - High frequency (W)	23.50
Current (A)	0.300
Product Voltage (V)	75
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	300
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	26

## T5 FHO Luxline Plus

24W/T5/830 FHO

0002772

### Lifetime data

Average life (Nominal) (h)	24000
Average life (Rated) (h)	24000
Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94
Rated survival factor (%) at 12000 h 50Hz	0.93
Rated survival factor (%) at 16000 h 50Hz	0.90
Rated survival factor (%) at 20000 h 50Hz	0.84

### Physical data

Nominal Product Length (mm)	550.0
Nominal Product Diameter (mm)	16
Max. Length base to base (mm) - A	549.0
Length base to pin Min-Max (mm) - B	553.7-556.1
Max. Lamp Length (mm) - C/L	563.2
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.043

### Packaging


Single packaging type	Carton
Product EAN number	5410288027722
Packaging single length / height (cm)	56.4
Packaging single width (cm)	1.9
Packaging single depth (cm)	1.9
DUN14 (outer)	15410288027729
Units per outer package	25
Packaging outer length / height (cm)	57.8
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	10.5

### Safety data

Lamp mercury content (mg)	2.30
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

## PHOTOMETRY

T5 FHO Luxline Plus  
24W/T5/830 FHO  
0002772

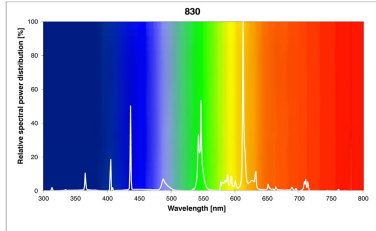

## TECHNICAL DRAWINGS



0002772



**24**  
kWh/1000h




2019/2015

# SYLVANIA

T5 FHO Luxline Plus  
24W/T5/830 FHO  
0002772



0002772

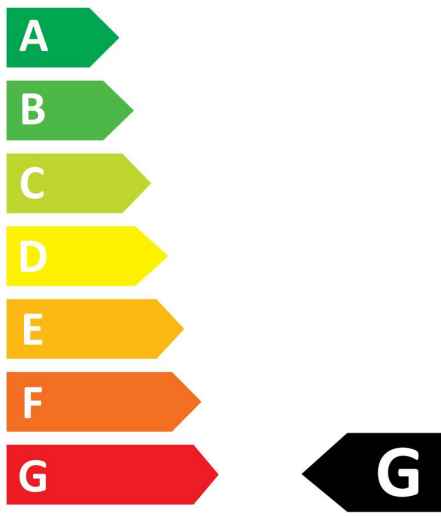

**24**  
kWh/1000h



2019/2015