

ENERGY AND AUTOMATION




Number of poles Nr. Operating voltage type AC

Contact characteristics

IEC Conventional free air thermal current Ith

63...125 Α

Dimensions

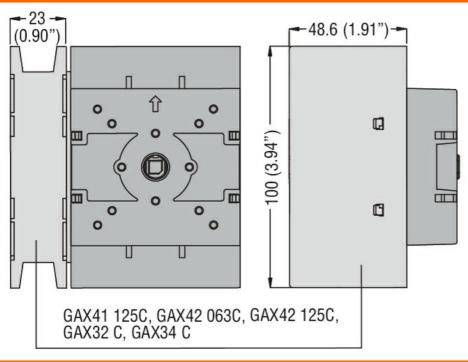

Wiring diagrams

Neutral terminal GAX31... - GAX32...



Certifications and compliance

Compliance

CSA C22.2

IEC/EN 60947-1

IEC/EN 60947-3

IEC/EN 60947-5-1

UL508



ENERGY AND AUTOMATION

UL98

Certifications

CCC

CSA C22.2 n°4

cULus according to UL98

EAC

ETIM classification

ETIM 8.0

EC002498 -Accessories/spare parts for lowvoltage switch technology