

Technical Data

TRANSISTOR



maximum ratings


VDS	400.0	V	NO.	BUZ76
VDG	400.0	V	TYPE	V-MOS
VGS	± 20.0	V		
ID	3.0	A		
IDM	12.0	A	CASE	TO-220AB
IG		A		
Max. Power Dissipation (PT) at TC = 25 °C	40.0	W		
Max. Thermal Resistance (Rth J-C)	3.1	°C/W		
Max. Junction Temperature (TJ)	150.0	°C		

PERFORMANCE CHARACTERISTICS at T_c = 25°C, unless otherwise noted

NO.	SYMBOL	CONDITIONS	MIN.	MAX.	UNITS
1.	BVDSS	ID = 250.0 μA (1)	400.0	-	V
2.	IDSS	VDS = 400.0 V	-	1.0	μA
3.	IDSS	VDS = 400.0 V, TJ = 125.0° C	-	100.0	μA
4.	IGSS	VGS = ± 20.0 V	-	100.0	nA
5.	VGS(TH)	ID = 1.0 mA	2.1	4.0	V
6.	RDS(ON)	ID = 2.0 A, VGS = 10.0 V	-	1.8	Ω
7.	Ciss	VDS = 25.0 V, f = 1.0 MHz (2)	-	650.0	pF
8.	Coss	VDS = 25.0 V, f = 1.0 MHz (2)	-	100.0	pF
9.	Crss	VDS = 25.0 V, f = 1.0 MHz (2)	-	40.0	pF
10.	td(ON)	VDD = 30.0 V, ID = 2.0 A, VGS = 10.0 V (2)	-	12.0	ns
11.	tr	VDD = 30.0 V, ID = 2.0 A, VGS = 10.0 V (2)	-	45.0	ns
12.	td(OFF)	VDD = 30.0 V, ID = 2.0 A, VGS = 10.0 V (2)	-	75.0	ns
13.	tf	VDD = 30.0 V, ID = 2.0 A, VGS = 10.0 V (2)	-	40.0	ns
14.					
15.					
16.					
17.					
18.					
19.					
20.					

Notes (1)pulse-tested tp ≤ 300 μs, duty cycle ≤ 2 %
(2)typical value

DIMENSIONS
in mm

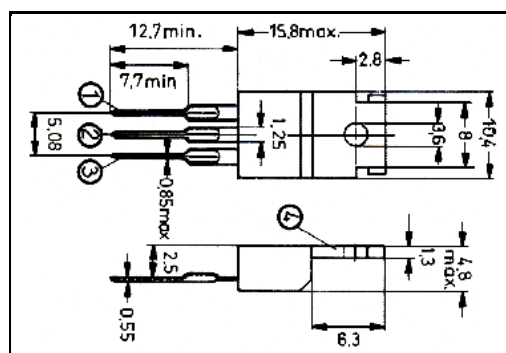

Marking BUZ76
Customer GENERAL PURPOSE