

BUSBAR SYSTEM, ACCESSORY BUSBAR DISTANCE  
 60 MM BASE LENGTH: 1100 MM INCREASED  
 CLEARANCE DISTANCES INCREASED CREEPAGE  
 DISTANCES ACC. UL508A ACC. TO UL508



Model

product brand name SENTRON

General Product Approval Declaration of Conformity Test Certificates



CSA



GOST



UR



EG-Konf.

[Special Test Certificate](#)

Shipping Approval other



GL



PRS



RINA

[other](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8US19222UA01>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8US19222UA01/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=8US19222UA01](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US19222UA01)

Cx-Online-Generator

<http://www.siemens.com/cax>

**Tender specifications**

<http://ausschreibungstexte.siemens.com/tiplv>

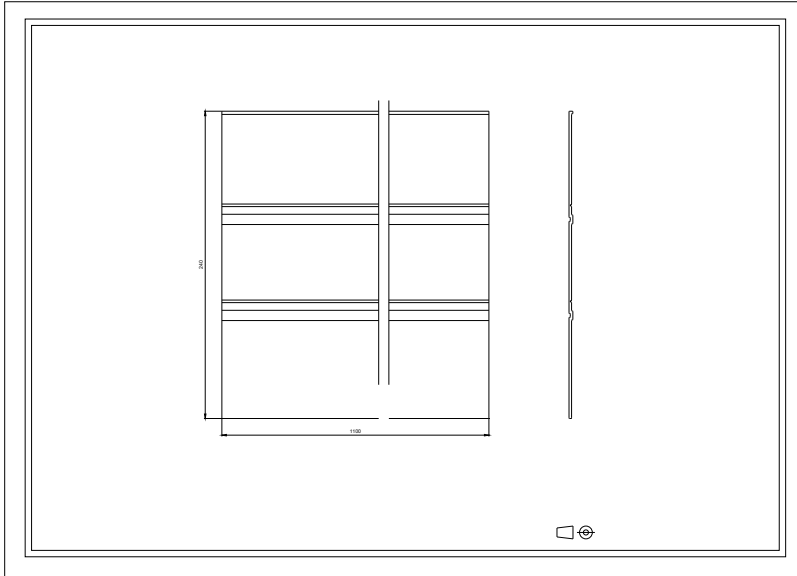

**last modified:**

11.03.2015