


L10402C221R-10

UNCONTROLLED DOCUMENT

PHYSICAL DIMENSIONS:

A	1.01 [.040]	±	0.18 [.007]
B	0.50 [.020]	±	0.20 [.008]
C	0.50 [.020]	±	0.20 [.008]
D	0.30 [.012]	±	MAX.



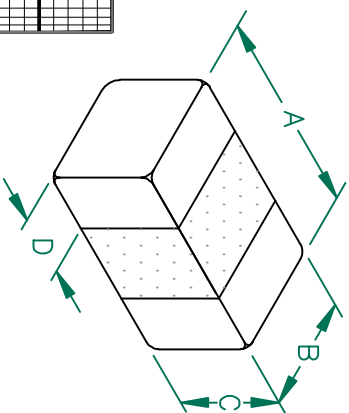


ELECTRICAL CHARACTERISTICS:


Z @ 100MHZ (Ω)	DCR (Ω)	Rated Current
Nominal	220	
Minimum	165	
Maximum	275	300 mA

NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS
7" REELS, 10,000 PCS/REEL, PAPER TAPE.
2. TERMINATION FINISH IS 100% TIN.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.

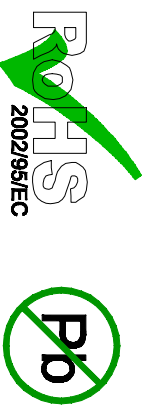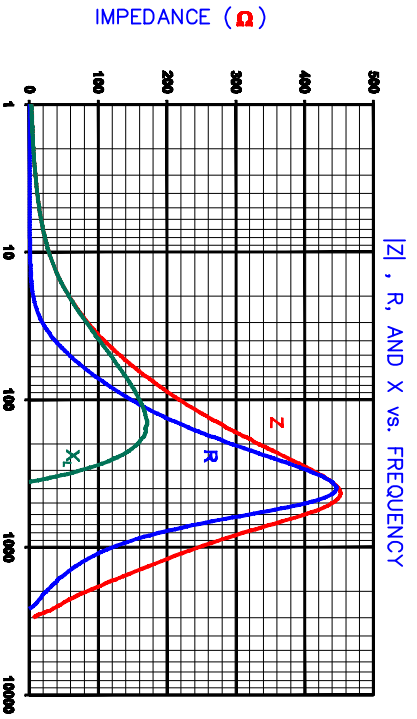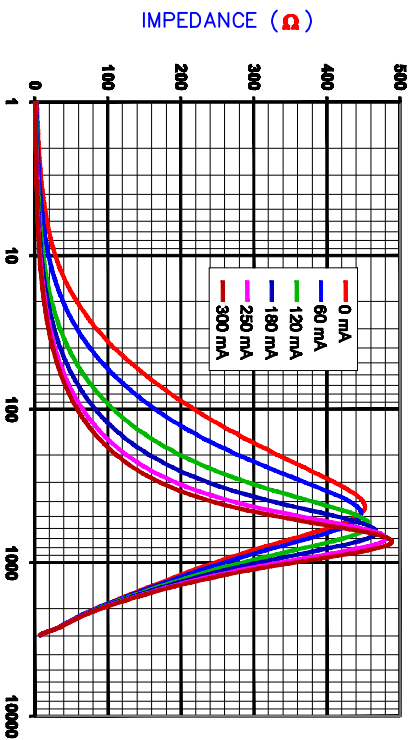


LAND PATTERNS FOR REFLOW SOLDERING

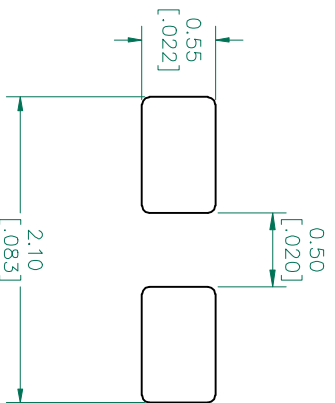

(For wave soldering, add 0.762 [.030] to this dimension.)

RECOMMENDED SOLDERING CONDITIONS

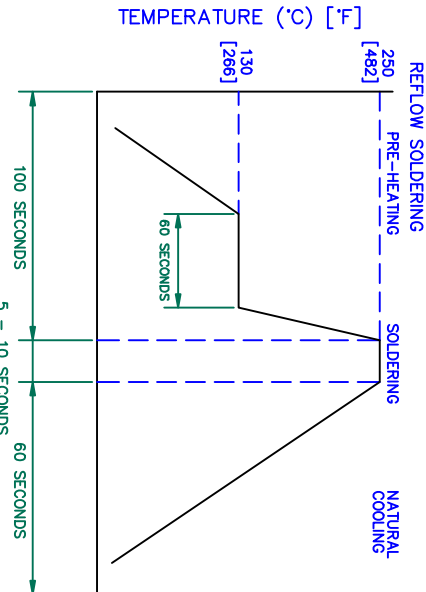

DIMENSIONS ARE IN mm [INCHES]

This print is the property of Laird Tech and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.



AGILENT E4991A RF Impedance/Material Analyzer
HP 16194A Test Fixture. TEST REF. 5615

REV	DESCRIPTION	DATE	INT	DATE	INT	SCALE	NTS	SHEET
B	UPDATE COMPANY LOGO	07/06/08	JRK	04/21/06	TMB	B	NTS	2 of 2
A	ORIGINAL DRAFT	04/21/06	TMB					

PROJECT/PART NUMBER: L10402C221R-10
PART TYPE: CO-FIRE
DRAWN BY: TMB