DO NOT SCALE
IF IN DOUBT - ASK

ALL COMPONENTS TO BE ROHS COMPLIANT

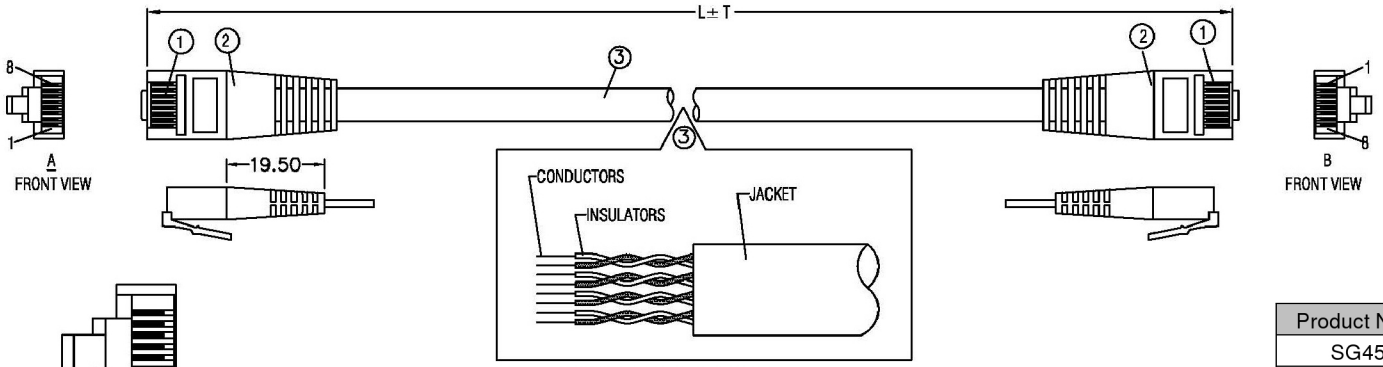

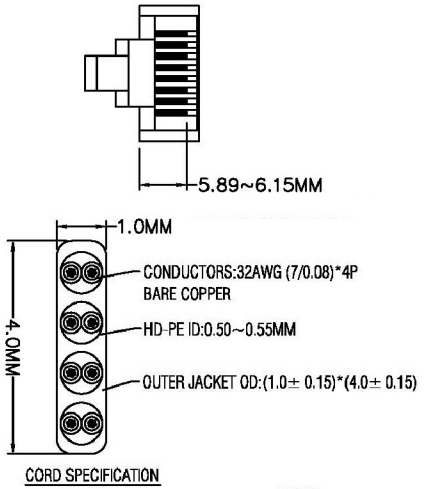



NOTES:
1. ELECTRICAL TEST:100% OPEN,SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE : 2 OHMS MAX. INSULATOR RESISTANCE: 5M OHMS MIN.
3. HI-POT: DC 300V 0.01sec.
4. ALL MATERIAL FIT ROHS STANDARD(INCLUDE ALL PACKING OR OTHER MATERIAL).
5. PRINTING WORDS OF CABLE: " CAT6 FLAT CABLE RoHS".

NO.	SPECIFICATION STANDARD	QTY
①	RJ45 MALE CONNECTOR,PIN GOLD PLATED Fu".	2
②	50P PVC OUTER MOLDING HOUSING.	2
③	CAT6 FLAT CABLE 32AWG(7/0.08)*4P(BARE COPPER) .	1

Product Name	Product Description
SG452	Cat 6 Slim, Grey, 0.5m
SG453	Cat 6 Slim, Grey, 1m
SG454	Cat 6 Slim, Grey, 2m
SG455	Cat 6 Slim, Grey, 3m
SG456	Cat 6 Slim, Grey, 5m
SG457	Cat 6 Slim, Grey, 10m
SG458	Cat 6 Slim, Grey, 15m
SG459	Cat 6 Slim, Blue, 0.5m
SG460	Cat 6 Slim, Blue, 1m
SG461	Cat 6 Slim, Blue, 2m
SG462	Cat 6 Slim, Blue, 3m
SG463	Cat 6 Slim, Blue, 5m
SG464	Cat 6 Slim, Blue, 10m
SG465	Cat 6 Slim, Blue, 15m
SG466	Cat 6 Slim, Black, 0.5m
SG467	Cat 6 Slim, Black, 1m
SG468	Cat 6 Slim, Black, 2m
SG469	Cat 6 Slim, Black, 3m
SG470	Cat 6 Slim, Black, 5m
SG471	Cat 6 Slim, Black, 10m
SG472	Cat 6 Slim, Black, 15m

REVISION	NOTES	DATE
A		

DRAWN BY	
DATE	
UNITS	METRIC mm

MAT'L:

FINISH:

TITLE : Cat6 Assemblies, Slim Type

PART NO: As above