## DIN RAIL POWER SUPPLY 12VDC 75WATT

**Electronics** 

STONTRONICS: DG-75-12

#### **Features:**

- Universal / Full Range Input
- Highly Reliable Design
- 100% Full Load Burn-in Test
- 3 Year Warranty



#### **Description:**

The TT Electronics range of Din Rail Power Supplies can be installed on either TS-35/7 or TS-35/18. Featuring wide ranging universal Input for many industrial application and come with a 3 year warranty as standard. This 75watt unit is offered in 12v and comes with built in active PFC


Specification	
Part Number	DG-75-12
DC Output	12V
Rated Output Current	6.3A
Ripple & Noise –25° C	≤200mV
Voltage ADJ. Range	12~14V
Voltage Accuracy	±1.0%
Line Regulation	±0.5%
Load Regulation	±1.0%
Set-up Time	<250mS@230Vac; <500mS@100Vac
Hold up Time	≥20mS(230Vac input, Full load)
Temperature Coefficient	+/-0.03%
Overshoot and Undershoot	<5%
Input Voltage Range	85Vac~264Vac, 127Vdc-360Vdc
Input Frequency Range	47Hz - 63Hz
Efficiency	88%
AC Current (max.)	<0.95 A/100Vac <0.45A/230Vac
Inrush Current (max.)	<30A/100Vac <60A/230Vac Cold start
Leakage Current	Input—output:<0.25mA Input—PG:<3.5mA
Over Load Protection	110%~150% of rated current, auto recovery
Over Voltage Protection	15~18V Shutdown and Re Power On
Short Circuit	Long-term mode, auto recovery
Operating Temp. & Humidity	-25°C to 70°C / 20% to 90%
Storage Temp. & Humidity	-40°C to 85°C / 5 % to 95%
Safety Standards	UL508, UL60950, EN60950
Withstand Voltage	Primary-Secondary:3.0KVac; ≤10mA
Isolation Resistance	>100M ohms
EMC Emission	Compliance to EN55032, EN55024, FCC PART 15 Class B
Harmonic Current	Compliance to EN61000-3-2, CLASS A
EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11; heavy industry level
MTBF	More than 300,000Hrs (25° C, Full load)
Dimensions	124*119*32mm


# DIN RAIL POWER SUPPLY 12VDC 75WATT




STONTRONICS: DG-75-12

### **Diagrams**

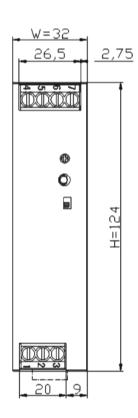

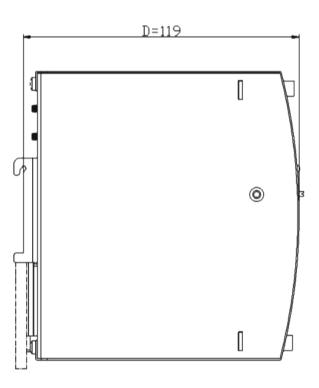

### **Derating Curve**

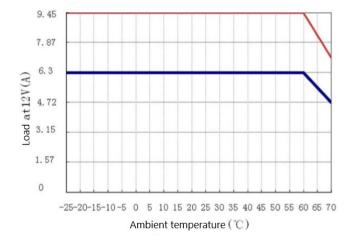

: short time working;