




**Customer: ELFA AB**  
56-123-20

**Transf. No. AA-58032**  
**Designed: 1995-03-23 / ts**

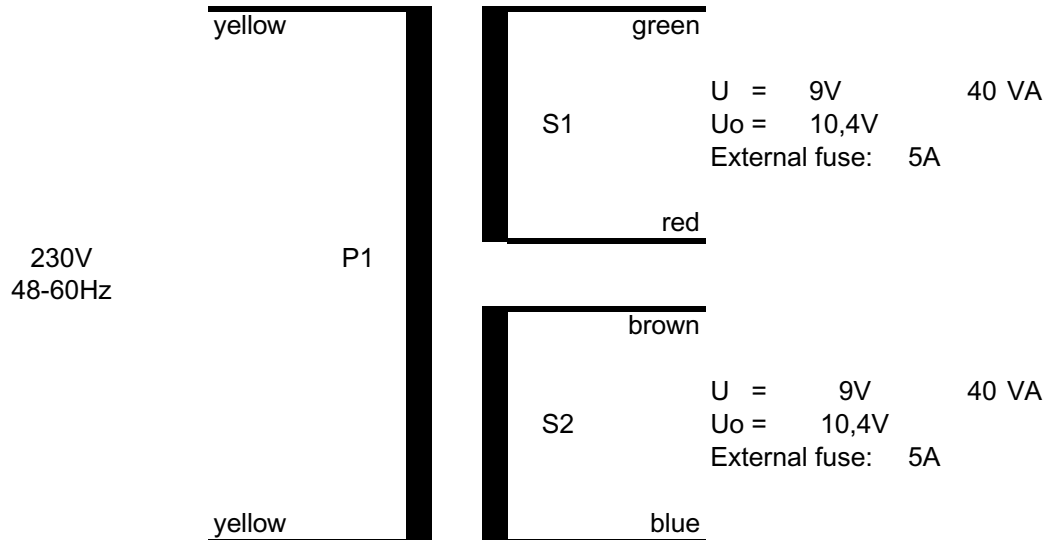

#### Classification

Protection against electrical shock:	Safety Isolating Transformer
Protection index:	IP00
Protection against short-circuit and abnormal use:	Non-short-circuit proof
Time of operation:	Continuously
Intended use:	Incorporated
Ambient temperature / Material Classification:	Ta40/E

Assembling:	1 pc	Metal Washer	D = 70	mm
	2 pcs	Rubber Pads	D = 70	mm

Dimensions:	OD =	92	mm
	H =	38	mm

Terminations:	Prim:	Multistranded Wire Style 3266.	Awg 22	L = 200mm
	Sec:	Solid Copper insulated with tubes of Natvar.		L = 200mm

Label on the paper box.

	Toroid International AB		
	Transf.No.	AA-58032	
	ELFA P/N:	56-123-20	

Label on transformer.

	Toroid International AB			
	Transf.No.	AA-58032		
	Prim.	230V 48-60Hz	ye-ye	
	Sec.	2x 9V	80 VA	
			gn-re/bn-bu	
			Fuse: 5A	





## EC/EEA Declaration of conformity

Type of equipment: **Safety Isolating Transformer**

Brand name: **Toroid**

Part no: **AA-58032**

Customer: **ELFA AB** **56-123-20**

Manufactures: Toroid International (Pvt) Ltd Toroid International AB  
 PO Box 15, Phase 2, FTZ Box 3  
 Katunayake, Sri-Lanka 351 03 Växjö, Sweden

Toroid India Pvt Ltd  
 Technopark Campus  
 Trivandrum 695 581  
 Kerala, India

Manufacture's representative  
 within EEA: Toroid International AB  
 Box 3  
 351 03 Växjö, Sweden

*As the manufacturer's authorised representative established within EEA, we declare that the product is in conformity with the provision of the EC directives: Low Voltage Directiven (LVD) 73/23/EEG, 93/68/EEG*

*The product fulfils the requirements according to the following harmonised standards: EN 61558-1, EN 60 950, EN 60 065 and IEC 601-1.*

*All transformers have been inspected and tested with approved result according to the following:*

1. Ocular inspection
2. No-load input current
3. No-load secondary voltage
4. Dielectric strength between primary an

*The product is to be regarded as a modular component to be used in an electric apparatus that in turn has to fulfil the EMC - directives.*

*The product itself does not need to be EMC approved for CE marking according to directive 89/336/EEG, 92/31/EEG and 93/68/EEG*

Date: 2003-05-07

---

Thomas Svensson / Design engineer