




TW120 25 dB GPS L1 In-line Amplifier

The TW120 by Tallysman Wireless is a rugged waterproof, low cost, low noise, low power, narrow band 25dB gain in-line amplifier, specially designed to tightly filter and boost weak GPS L1 signals, while maintaining low antenna noise figures. The TW120 provides for much longer cable runs from antenna to receiver, for applications such as mast-mount, roof-top and large vehicle installations, without any degradation of system sensitivity.

The TW120 passes DC directly from input to output to support centre conductor DC supply to the antenna, and so avoiding the need for an additional bias source or bias "T".



TW120 Dimensions (mm)

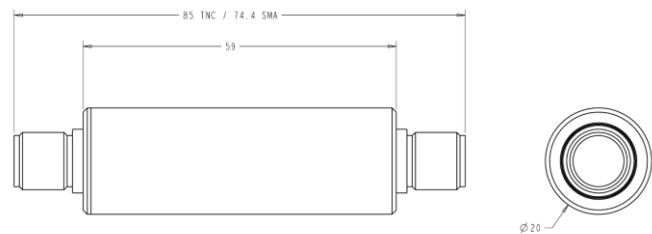

Applications

- GNSS and Telematics Systems
- Wireless Telecom & Cellular Base Station Timing Applications
- Commercial and Industrial Timing and Synchronization Applications

Features

- Very low noise
- Wide input voltage range, 3 to 10 VDC
- Powered via antenna coax from receiver
- 50 Ohm port impedance
- Cylindrical nickel-plated brass, IP67 compliant housing
- Gold-plated SMA & TNC Jack connectors
- RoHS compliant

Benefits

- Improves signal reception
- Enables extended cable runs
- Avoid installation of costly low-loss cable
- Fits in-line with antenna cable
- No external voltage supply needed
- Maintains low antenna LNA noise figure
- Easy to install – mounting clamp included



TW120 25 dB GPS L1 In-line Amplifier

Specifications

Vcc =3.3V, over full bandwidth, T=25 °C

Electrical

| | |
|--------------------------------|--------------------------|
| • Gain | 25dB +3dB/-0dB typ. |
| • Noise Figure | <1.5dB typ. |
| • -3dB Bandwidth | 1555 to 1590 MHz |
| • VSWR 1562 to 1662MHz | <1.5 |
| • Lower Stop band Attenuation | -35dB, f < 530 MHz |
| • Upper Stop band Attenuation | -35dB, f > 1620 MHz |
| • Input Return Loss Zo=50 | >12dB (1570 to 1580 MHz) |
| • Output Return Loss Zo=50 | >9dB (1570 to 1580 MHz) |
| • Reverse Isolation | >35 dB |
| • Output 1dB Compression Level | >-10 dBm |
| • Output IP3 | >0 dBm |
| • Maximum Input Level | -5 dBm |
| • Supply Voltage Range | +3 to 10 VDC Nominal |
| • Supply Current | 15 mA typical |

Mechanicals & Environmental

| | |
|--|--|
| • Mechanical Size (body dimensions only) | 59 mm L x 20 mm Dia. (2.32" L x 0.787" Dia.) |
| • Connectors | SMA Jack or TNC Jack |
| • Operating Temp. Range | -40 to +85 °C |
| • Enclosure | Nickel-plated brass |
| • Environmental | RoHS and IP67 compliant |
| • Warranty | One year – parts and labour |

Ordering Information

| | |
|---|-----------|
| • TW120 - 25dB gain In-Line Amp with SMA Jack | 32-0120-0 |
| • TW120 - 25dB gain In-Line Amp with TNC Jack | 32-0120-1 |

Please contact Tallysman Wireless for additional information

Tallysman Wireless Inc

106 Schneider Road, Unit 3
Ottawa ON K2K 1Y2 Canada
Tel 613 591 3131
Fax 613 591 3121
sales@tallysman.com

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2010 Tallysman Wireless Inc. All rights reserved.