




MPZ2012S601AT000

Applications	 Commercial Grade
Feature	 Power Line
Series	MPZ Series / MPZ2012 Type
Status	Production




Size	
Length(L)	2.00mm +/-0.20mm
Width(W)	1.25mm +/-0.20mm
Thickness(T)	0.85mm +/-0.20mm
Recommended Land Pattern (A)	0.80mm Nom.
Recommended Land Pattern (B)	1.00mm Nom.
Recommended Land Pattern (C)	1.20mm Nom.

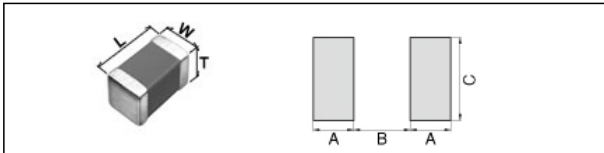Electrical Characteristics	
Impedance at 100MHz	600Ω +/-25%
Rated Current	2A
DC Resistance [Max.]	100mΩ


Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125degC
Soldering Method	Reflow, Iron Soldering
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000Pcs Min.
Weight	0.008g

MPZ2012S601AT000

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

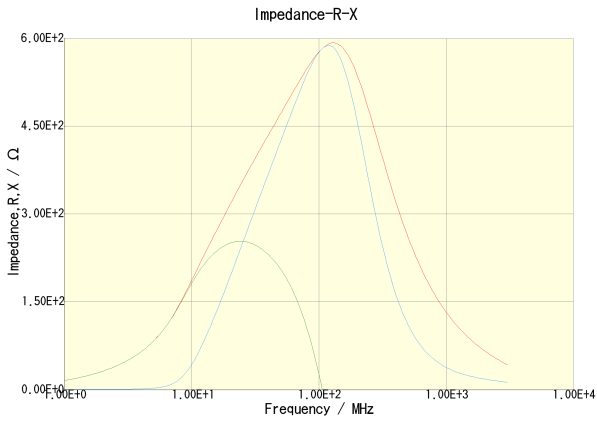


MPZ2012S601AT000(Z) MPZ2012S601AT000(R) MPZ2012S601AT000(X)

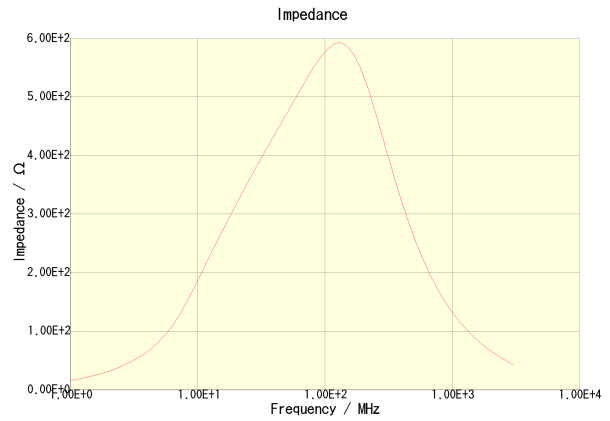

MPZ2012S601AT000

Temperature Rise by DC
no data available

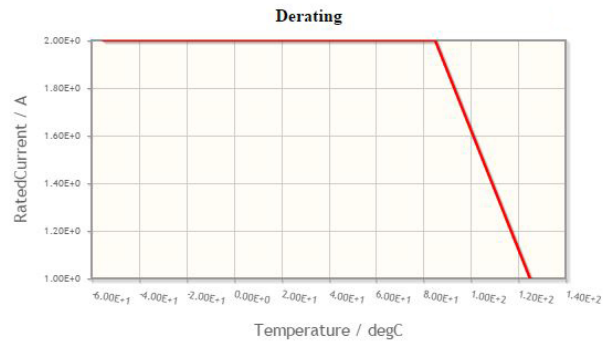

MPZ2012S601AT000

- This PDF document was created based on the data listed on the TDK Corporation website.
- All specifications are subject to change without notice.