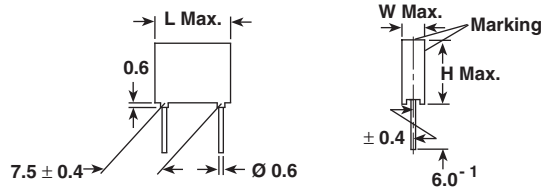


# Metallized Polyester Film Capacitors

## Related Document: IEC 60384-2

Dimensions in millimeters


**MAIN APPLICATIONS**

Blocking, bypassing, filtering and timing, high frequency coupling and decoupling. Interference suppression in low voltage applications.

**MARKING**

Manufacturer's logo/type/C-value/rated voltage/tolerance/date of manufacture

**DIELECTRIC**

Polyester film

**ELECTRODES**

Vacuum deposited aluminum

**COATING**

Flame retardant plastic case (UL-class 94 V-0), green, epoxy resin sealed

**CONSTRUCTION**

Extended metallized film (refer to general information)

**LEADS**

Tinned wire

**IEC TEST CLASSIFICATION**

55/100/56, according to IEC 60068

**OPERATING TEMPERATURE RANGE**

- 55°C to + 100°C

**CAPACITANCE RANGE**

1000pF to 1.0µF

**CAPACITANCE TOLERANCES**

± 20% (M), ± 10% (K), ± 5% (J)

**MAXIMUM PULSE RISE TIME**

PCM (mm)	Maximum Pulse Rise Time $d_v/d_t$ [V/µs]				
	63 VDC	100 VDC	250 VDC	400 VDC	630 VDC
7.5	12	20	32	41	70

 If the maximum pulse voltage is less than the rated voltage higher  $d_v/d_t$  values can be permitted.

**DISSIPATION FACTOR TAN  $\delta$** 

MEASURED AT	C ≤ 0.1µF	0.1µF < C ≤ 1.0µF
1kHz	8 x 10 <sup>-3</sup>	8 x 10 <sup>-3</sup>
10kHz	15 x 10 <sup>-3</sup>	15 x 10 <sup>-3</sup>
100kHz	25 x 10 <sup>-3</sup>	—
	Maximum values	

**FEATURES**

 Product is completely lead (Pb)-free.  
 Product is RoHS compliant.

**RATED VOLTAGES (U<sub>R</sub>):**

63 VDC, 100 VDC, 250 VDC, 400 VDC, 630 VDC


**PERMISSIBLE AC VOLTAGES (RMS) UP TO 60Hz**

40 VAC, 63 VAC, 160 VAC, 200 VAC, 220 VAC


**TEST VOLTAGE (ELECTRODE/ELECTRODE)**

 1.6 x U<sub>R</sub> for 2 s

**INSULATION RESISTANCE**

Measured with 100 VDC (63 VDC series at 50 VDC) after one minute

**For C ≤ 0.33µF and U<sub>R</sub> > 100 VDC:**

30,000 MΩ minimum value (100,000 MΩ typical value)

**For C ≤ 0.33µF and U<sub>R</sub> ≤ 100 VDC:**

15,000 MΩ minimum value (50,000 MΩ typical value)

**TIME CONSTANT**

Measured at 100 VDC (63 VDC series measured at 50 VDC) after one minute

**For C > 0.33µF and U<sub>R</sub> ≤ 100 VDC:**

5000 s minimum value (15,000 s typical value)

**CAPACITANCE DRIFT**

Up to + 40°C, ± 1.5% for a period of two years

**DERATING FOR DC AND AC. CATEGORY VOLTAGE U<sub>C</sub>**

 At + 85°C: U<sub>C</sub> = 1.0 U<sub>R</sub>

 At + 100°C: U<sub>C</sub> = 0.8 U<sub>R</sub>
**SELF INDUCTANCE**

~ 6nH measured with 2mm long leads

**PULL TEST ON LEADS**

≥ 30 N in direction of leads according to IEC 60068-2-21

**RELIABILITY**

Operational life &gt; 300,000 hz

 Failure rate < 2 FIT (40°C and 0.5 x U<sub>R</sub>)

 For further details, please refer to the general information available at [www.vishay.com/doc?26033](http://www.vishay.com/doc?26033).



CAPACITANCE	CAPACITANCE CODE	VOLTAGE CODE 06 63 VDC/ 40 VAC			VOLTAGE CODE 01 100 VDC/ 63 VAC			VOLTAGE CODE 25 250 VDC/ 160 VAC			VOLTAGE CODE 40 400 VDC/ 200 VAC			VOLTAGE CODE 63* 630 VDC/ 220 VAC		
		W	H	L	W	H	L	W	H	L	W	H	L	W	H	L
1000pF	- 210	—	—	—	—	—	—	—	—	—	—	—	—	2.5	7.5	10.0
1500pF	- 215	—	—	—	—	—	—	—	—	—	—	—	—	2.5	7.5	10.0
2200pF	- 222	—	—	—	—	—	—	—	—	—	—	—	—	2.5	7.5	10.0
3300pF	- 233	—	—	—	—	—	—	—	—	—	2.5	7.5	10.0	3.0	8.5	10.0
4700pF	- 247	—	—	—	—	—	—	—	—	—	2.5	7.5	10.0	—	—	—
6800pF	- 268	—	—	—	—	—	—	—	—	—	2.5	7.5	10.0	—	—	—
0.01μF	- 310	—	—	—	—	—	—	2.5	7.5	10.0	3.0	8.5	10.0	—	—	—
0.015μF	- 315	—	—	—	—	—	—	2.5	7.5	10.0	—	—	—	—	—	—
0.022μF	- 322	—	—	—	2.5	7.5	10.0	3.0	8.5	10.0	—	—	—	—	—	—
0.033μF	- 333	—	—	—	2.5	7.5	10.0	3.0	8.5	10.0	—	—	—	—	—	—
0.047μF	- 347	—	—	—	2.5	7.5	10.0	4.0	9.0	10.0	—	—	—	—	—	—
0.068μF	- 368	—	—	—	2.5	7.5	10.0	4.5	9.5	10.0	—	—	—	—	—	—
0.1μF	- 410	2.5	7.5	10.0	3.0	8.5	10.0	5.0	10.5	10.3	—	—	—	—	—	—
0.15μF	- 415	2.5	7.5	10.0	3.0	8.5	10.0	—	—	—	—	—	—	—	—	—
0.22μF	- 422	3.0	8.5	10.0	4.0	9.0	10.0	—	—	—	—	—	—	—	—	—
0.33μF	- 433	4.0	9.0	10.0	5.0	10.5	10.3	—	—	—	—	—	—	—	—	—
0.47μF	- 447	4.5	9.5	10.0	5.7	11.5	10.3	—	—	—	—	—	—	—	—	—
0.68μF	- 468	5.0	10.5	10.3	—	—	—	—	—	—	—	—	—	—	—	—
1.0μF	- 510	5.7	11.5	10.3	—	—	—	—	—	—	—	—	—	—	—	—

Further values upon request.


\*Not suitable for mains applications.

Please refer to X-capacitors in our catalog "RFI Suppression Components".


**RECOMMENDED PACKAGING**

LETTER CODE	TYPE OF PACKAGING	HEIGHT (H) (mm)	REEL DIAMETER (mm)	ORDERING CODE EXAMPLE	PCM 7.5
D	AMMO	16.5	S*	MKT 1818-310-255-D	X
G	AMMO	18.5	S*	MKT 1818-310-255-G	X
F	REEL	16.5	350	MKT 1818-310-255-F	X
W	REEL	18.5	350	MKT 1818-310-255-W	X
—	BULK	—	—	MKT 1818-310-255	X


\*S = box size 55 x 210 x 340mm (W x H x L)

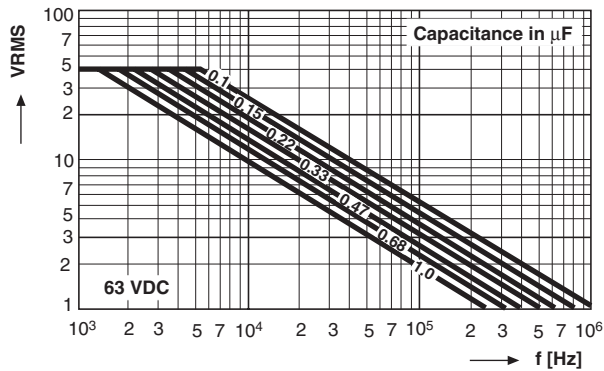


Permissible AC Voltage versus Frequency

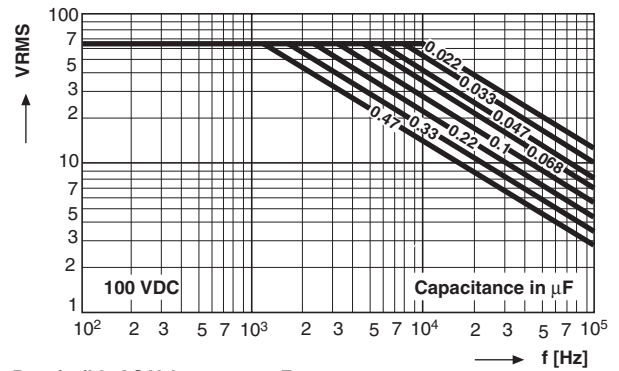


Permissible AC Voltage versus Frequency

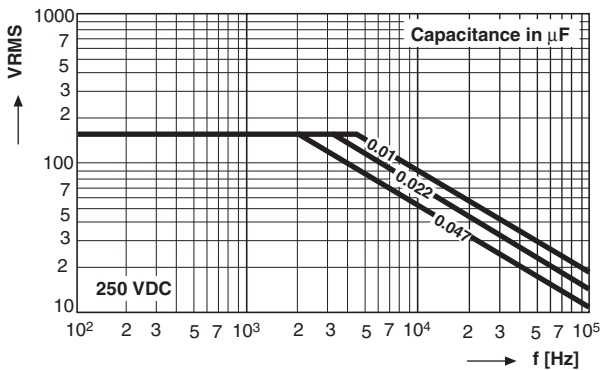

Permissible AC Voltage versus Frequency

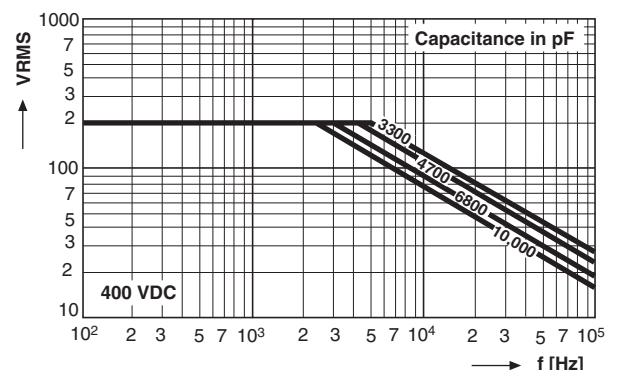

Permissible AC Voltage versus Frequency

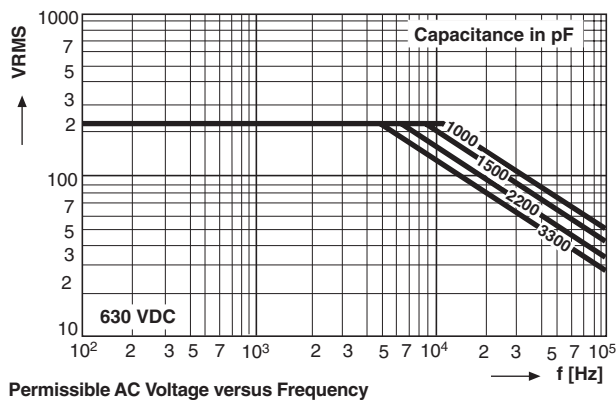

Permissible AC Voltage versus Frequency



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.