15pcs RJ-45 Modular Plug Connector Set 8P8C, CAT. 5

1906C163 - Shielded

1906C164 - Unshielded

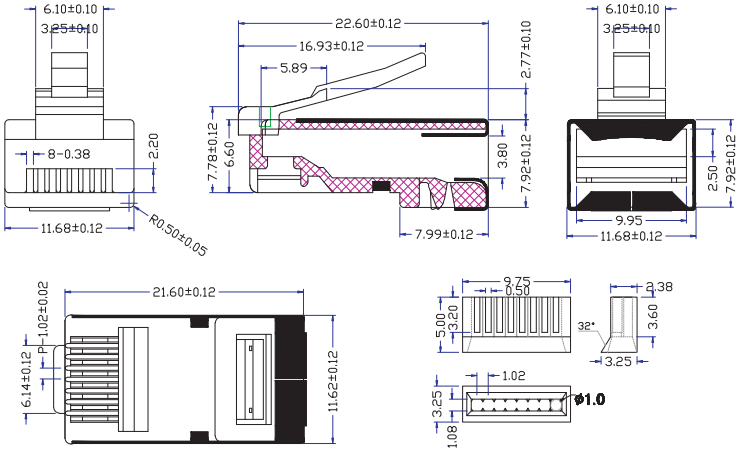

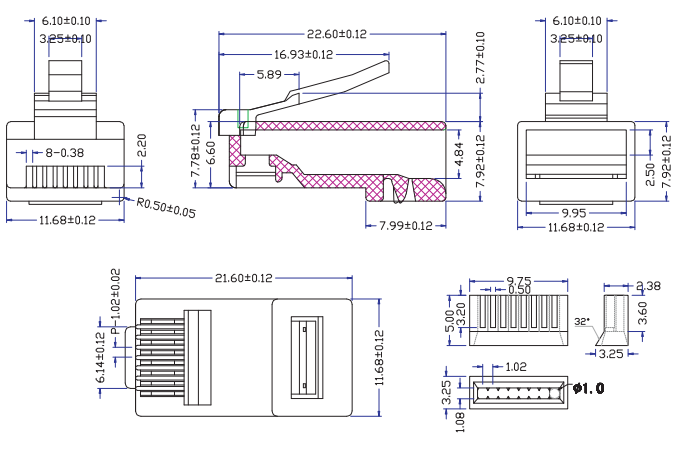

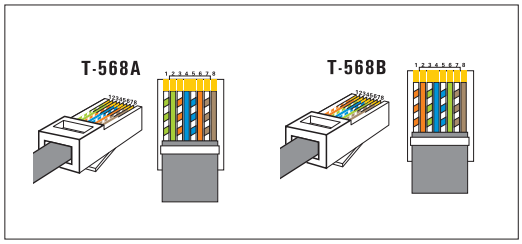

Technical:
250 V/AC max. at 2 amp.
Dielectric with standing 500 V/AC
Insulation resistance: 500Mohm
Termination resistance: 35 Mohm
Mechanical:
Cable-to-Plug tensile strength: 20LBs (89N) min.
Durability: 500 mating cycles

This is a publication by Quadrios GmbH • Bahnhofstraße 16 • D-92670 Windischeschenbach (www.quadrios.de)

All right including translation reserved. Reproduction by any method or the capture in electronic data processing system require the prior written approval by the editor. Reprinting, also in part, is prohibited. This publication represents the technical status at the time of printing.
All statements without guarantee
© Copyright 2018 by Quadrios GmbH