


Grove - AHT20 I2C Industrial Grade Temperature and Humidity Sensor

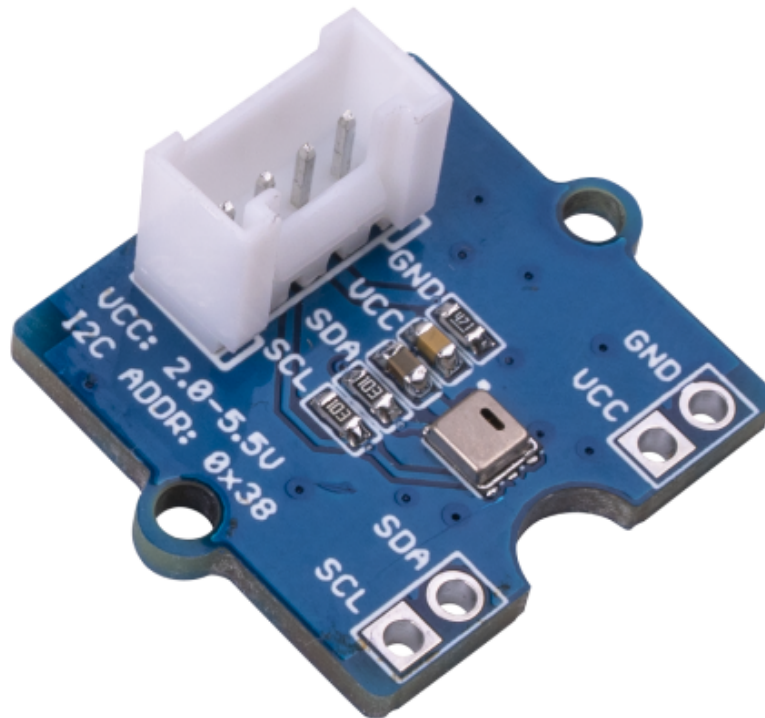

AHT20 is a new generation of temperature and humidity sensor embedded with a dual-row flat and no-lead SMD package, suitable for the reflow soldering. AHT20 is equipped with a newly designed ASIC chip: an improved MEMS semiconductor capacitive humidity sensor, and a standard on-chip temperature sensor. The output is the I2C protocol with the Grove interface.

PRODUCT DETAILS

Key Features

- Temperature measurement range $-40 \sim 85^{\circ}\text{C}$, Humidity measurement range $0 \sim 100\% \text{ RH}$
- Digital output, Grove I2C interface
- Excellent long-term stability
- SMD package suitable for reflow soldering
- Quick response and strong anti-interference ability
- Compatible with Arduino
- 4-pin interface reserved

Description

AHT20 is a new generation of temperature and humidity sensor embedded with a dual-row flat and no-lead SMD package, suitable for the reflow soldering. AHT20 is equipped with a newly designed ASIC chip: an improved MEMS semiconductor capacitive humidity sensor, and a standard on-chip temperature sensor.

The performance of AHT20 is more stable in harsh environments compared with the previous generation of temperature and humidity sensor such as Grove - Temperature & Humidity Sensor Pro (AM2302/DHT22), as a matter of fact, AHT20 is fittable in most **industrial scenarios**.

The output is the I2C protocol with the Grove interface. We have developed more than 300 Grove modules, covering a wide range of applications that can fulfill a variety of needs. Just plug and play to get started easily!

Specification

- Operating Voltage: DC:2.0-5.5V
- Measuring Range (humidity) 0 ~ 100% RH
- Temperature Range: -40 ~ + 85 °C
- Humidity Accuracy: ± 2% RH (25 °C)
- Temperature Accuracy ± 0.3 °C
- Resolution: Temperature: 0.01 °C, Humidity: 0.024% RH
- Output Interface: Grove I²C Interface
- I2C address: 0x38

Dimensions

24x20x12(mm)

ECCN/HTS

HSCODE 9025900090

UPC