


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY

	REVISIONS			DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398					
D	CP#	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1	876	Α	RELEASED	EO	6/5/06	TL	06/07/06	НО	06/07/06

SPC-F005.DWG



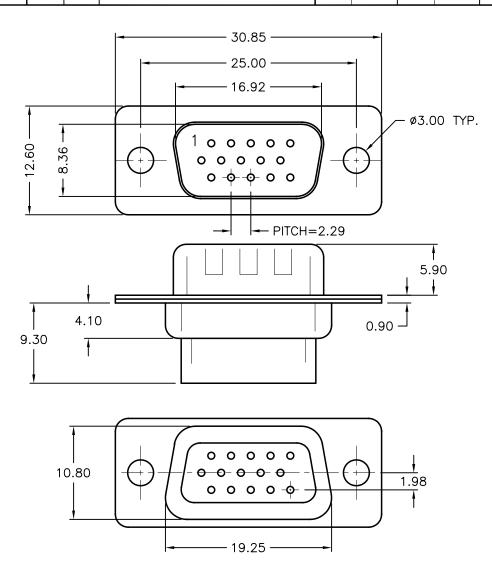

Specification:

1. Shell: Steel, Tin Plated

2. Insulator: PBT +30% Fiber Glass, Black, UL94-V0 Rated

3. Retention Springs: Stainless Steel

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED
HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE
BELIEVE TO BE ACCURATE AND RELIABLE. SINCE
CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE
USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT
FOR THE INTENDED USE AND ASSUME ALL RISK AND
LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, FRACTIONS, DECIMALS, ANGLES .X ±0.2 [±0.008] .XX ±0.12 [±0.005]

DRAWN BY:	DATE:
EKLAS ODISH	6/5/06
CHECKED BY:	DATE:
THOMAS LEE	06/07/06
APPROVED BY:	DATE:
HISHAM ODISH	06/07/06

SCALE: NTS

		ING TITLE: High—Density D—Sub, 15 Pin	Male,	Crimp Type)
	SIZE	DWG. NO.	ELECT	TRONIC FILE	RE\
	Α	SPC15431	79	K5011.DWG	A
ı					

U.O.M.: [mm] INCHES

SHEET:

1 OF 1