


CORE DIMENSIONS:

A	14.99 [.590]	±	0.30 [.012]
B	6.60 [.260]	±	0.20 [.008]
C	29.16 [1.148]	±	0.64 [.025]
D	7.44 [.293]	±	0.15 [.006]


IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	130 Ω	320 Ω	510
Minimum	- Ω	256 Ω	-

Z vs. FREQUENCY
(REF. ONLY)

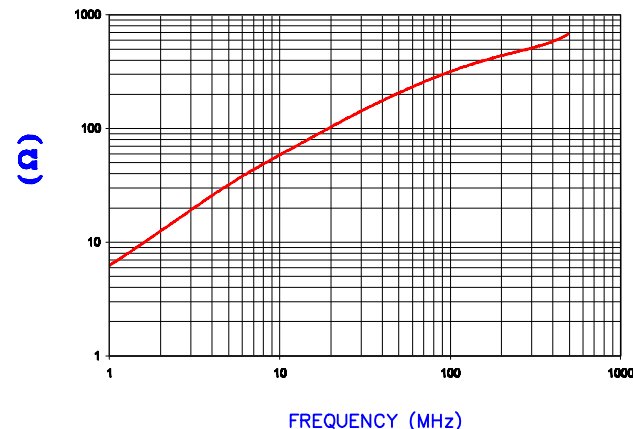

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture, REF # 3458

UNCONTROLLED DOCUMENT

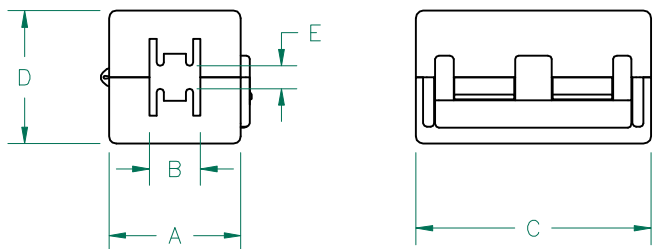

CASE DIMENSIONS:

A	18.15 [.715]	±	1.00 [.039]
B	7.05 [.278]	±	1.00 [.039]
C	32.50 [1.280]	±	1.00 [.039]
D	18.90 [.744]	±	1.00 [.039]
E	3.40 [.134]		Ref.

NOTES:

1. ASSEMBLED PART #: 28A2025-0A2
2. CASE COLOR: BLACK - "0A2"
3. CASE FLAMMABILITY RATING: UL94 V-2.
4. CASE MATERIAL: Halogen Free Nylon

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
REV	DESCRIPTION	DATE	INT				
K	UPDATED CASE TOLERANCE	11/09/12	Jcai	PROJECT/PART NUMBER: 28A2025-0A2		REV	DRAWN BY: JRK
J	UPDATED CORE MATERIAL	03/13/12	Jcai			K	
H	UPDATED NOTE 3	09/15/10	JUN	DATE: 06/29/04		SCALE: NTS	MATERIAL: FERRITE
G	UPDATE COMPANY LOGO ADD NOTES 3&4	01/27/09	JRK			CAD # 28A2025-0A2-K	
F	UPDATE 100MHz MINIMUM VALUE UPDATE COMPANY LOGO	07/16/07	TMB	DATE: 06/29/04		SCALE: NTS	MATERIAL: FERRITE
E	REMOVE CORE & CASE P/N REFERENCE	05/17/06	TMB			CAD # 28A2025-0A2-K	
D	REVISE CASE DIMENSIONS A, B, & D COR REV LEVEL TYPO IN LAST REVISION	04/01/06	TMB	DATE: 06/29/04		SCALE: NTS	MATERIAL: FERRITE
C	CHG CORE "C" & "D" DIM TOLERANCES CHG NOTE 5 CASE COLOR TO BLACK	01/26/06	TMB			CAD # 28A2025-0A2-K	
REV	DESCRIPTION	DATE	INT	DATE: 06/29/04		SCALE: NTS	MATERIAL: FERRITE