# DATASHEET



## EPIC® ULTRA H-B 24 TS QB

70250219 14.11.2013

Housing H-B ULTRA: for higher functional reliability Optimum, low-resistance 360° screening All-purpose due to high corrosion resistance and high environmental protection. Space-saving due to compact dimensions Faster than any other comparable system High mechanical resistance





Good chemical resistance



Wide clamping range



Assembly time



Optimum strain relief



Space requirement



Robust



Integrated SKINTOP® cable gland



Connector with standard housing unit



Waterproof

Info FMC protection

EMC protection Corrosion-resistant SKINTOP® integrated cable gland

### Application range

In EMC-sensitive environments For fixed and flexible applications (e.g. machinery building, wind turbines) Construction machinery Electric motor manufacturing

		Casico	
	-0-		

Product Management
--------------------

# DATASHEET



### EPIC® ULTRA H-B 24 TS QB

70250219

14.11.2013

#### **Product features**

Housings with the BRUSH addition come with BRUSH cable screen contacting Pluggable with standard housings Corrosion-resistant according to DIN EN 6988 Resistance to cyclic salt spray is tested according to IEC 68-2-52, severity level 2 Salt spray testing according to DIN EN ISO 9227, method NSS, period of test 480 hours

#### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

<b>Technical Data</b> Article:	ULTRA H-B 24 TS QB 7-15
Cable clamping range (mm):	7 - 15
Pieces / PU:	1
Material:	Housing: nickel-plated zinc die-casting Lever and bolts: stainless steel Sealing: NBR Cable gland Body: nickel-plated brass Insert: PA Seal: special elastomer
Protection rating:	IP 65
Temperature range:	-40°C to +100°C


Product Management	Document: EPIC® ULTRA H-B 24 TS QB	2/3		
PN 0486/01_03.10 ©2012 Lapp Group - Technical changes reserved Photographs are not to scale and do not represent detailed images of the respective products.				


# DATASHEET



## EPIC® ULTRA H-B 24 TS QB

70250219 14.11.2013

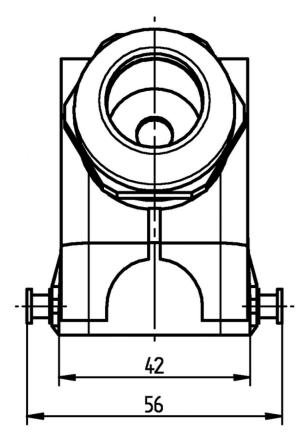

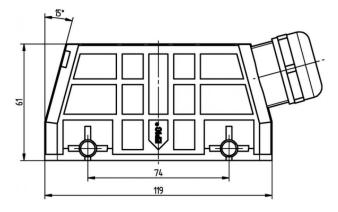

Product Management	Document: EPIC® ULTRA H-B 24 TS QB	3 / 3
PN 0486/01_03.10 Photographs are not to scale and do not represent		