

## Metallized Polypropylene (PP) Capacitors PCM 7.5 mm to 37.5 mm

### Special Features

- High volume/capacitance ratio
- Self-healing
- Very low dissipation factor
- Negative capacitance change versus temperature
- Very low dielectric absorption
- According to RoHS 2002/95/EC

### Typical Applications

For high frequency applications e.g.

- Sample and hold
- Timing
- Oscillating circuits
- High frequency coupling and decoupling

### Construction


#### Dielectric:

Polypropylene (PP) film

#### Capacitor electrodes:

Vacuum-deposited

#### Internal construction:

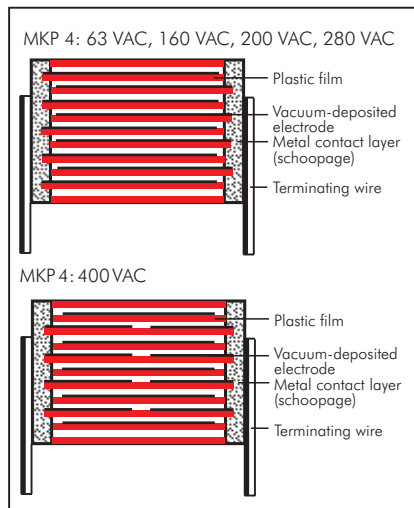

#### Encapsulation:

Solvent-resistant, flame-retardent plastic case with epoxy resin seal, UL 94 V-0

#### Terminations:

Tinned wire.

#### Marking:

Colour: Red. Marking: Black.  
Epoxy resin seal: Red

### Electrical Data

#### Capacitance range:

0.01  $\mu$ F to 33  $\mu$ F (E12-values on request)

#### Rated voltages:

100 VDC, 250 VDC, 400 VDC,  
630 VDC, 1000 VDC

#### Capacitance tolerances:

$\pm 20\%$ ,  $\pm 10\%$ ,  $\pm 5\%$

#### Operating temperature range:

$-55^{\circ}$  C to  $+100^{\circ}$  C

#### Climatic test category:

55/100/56 in accordance with IEC

#### Insulation resistance at $+20^{\circ}$ C:

$C \leq 0.33 \mu\text{F}$ :  $\geq 1 \times 10^5 \text{ M}\Omega$

(mean value:  $5 \times 10^5 \text{ M}\Omega$ )

$C > 0.33 \mu\text{F}$ :  $\geq 30\,000 \text{ sec (M}\Omega \times \mu\text{F)}$

(mean value: 100 000 sec)

Measuring voltage: 100 V/1 min.

#### Dissipation factors at $+20^{\circ}$ C:

$\tan \delta \leq 10 \times 10^{-4}$  at 1 kHz

#### Maximum pulse rise time:

Capacitance $\mu\text{F}$	max. pulse rise time V/ $\mu\text{sec}$ at $T_A < 40^{\circ}$ C				
	100 VDC	250 VDC	400 VDC	630 VDC	1000 VDC
0.01 ... 0.022	450	450	450	500	550
0.033 ... 0.068	250	250	300	350	400
0.1 ... 0.22	150	150	200	250	300
0.33 ... 0.68	100	100	150	200	200
1.0 ... 2.2	75	100	100	150	150
3.3 ... 4.7	60	100	100	120	–
6,8 ... 10	40	50	60	85	–
15 ... 33	35	50	–	–	–

for pulses equal to the rated voltage

#### Test specifications:

In accordance with IEC 60384-16  
and EN 131 200

#### Test voltage:

$1.6 U_r$ , 2 sec.

#### Dielectric absorption:

0.05 %

#### Voltage derating:

A voltage derating factor of 1.35 % per K  
must be applied from  $+85^{\circ}$  C for DC  
voltages and from  $+75^{\circ}$  C for AC  
voltages.

#### Reliability:

Operational life  $> 300\,000$  hours

Failure rate  $< 2$  fit ( $0.5 \times U_r$  and  $40^{\circ}$  C)

### Mechanical Tests

#### Pull test on leads:

$d \leq 0.8 \phi$ : 10 N in direction of leads

$d > 0.8 \phi$ : 20 N in direction of leads

according to IEC 60068-2-21

#### Vibration:

6 hours at 10 ... 2000 Hz and 0.75 mm

displacement amplitude or 10 g in

accordance with IEC 60068-2-6

#### Low air density:

1 kPa = 10 mbar in accordance with

IEC 60068-2-13

#### Bump test:

4000 bumps at 390 m/sec<sup>2</sup>

in accordance with IEC 60068-2-29

### Packing

Available taped and reeled up to and

including case size 15 x 26 x 31.5 /

PCM 27.5 mm.

Detailed taping information and graphs

at the end of the catalogue.

For further details and graphs please

refer to Technical Information.

## Continuation

### General Data

Capacitance	100 VDC/63 VAC*				250 VDC/160 VAC*				400 VDC/220 VAC*				630 VDC/280 VAC*				1000 VDC/400 VAC*			
	W	H	L	PCM**	W	H	L	PCM**	W	H	L	PCM**	W	H	L	PCM**	W	H	L	PCM**
0.01 $\mu$ F	3	8.5	10	7.5	3	8.5	10	7.5	3	8.5	10	7.5	3	8.5	10	7.5*	5.7	12.5	10.3	7.5*
0.015 "	3	8.5	10	7.5	3	8.5	10	7.5	3	8.5	10	7.5*	4	9	13	10*	5	11	13	10*
0.022 "	3	8.5	10	7.5	3	8.5	10	7.5	4	9	13	10*	4	9	13	10*	5	11	18	15*
0.033 "	3	8.5	10	7.5*	3	8.5	10	7.5*	4	9	13	10*	4.5	9.5	10.3	7.5*	5	11	18	15
0.047 "	4	9	13	10*	4	9	13	10*	4	9	13	10*	4	9	13	10*	5	11	18	15
0.068 "	4	9	10	7.5*	4	9	10	7.5*	4	9	13	10*	5	11	13	10*	5	11	18	15
	4	9	13	10*	4	9	13	10*	5.7	12.5	10.3	7.5*	6	12	13	10*	8	15	18	15*
	4	9	13	10*	4	9	13	10*	5	11	13	10*	6	12.5	18	15*	6	15	26.5	22.5*
0.1 $\mu$ F	4.5	9.5	10.3	7.5*	4.5	9.5	10.3	7.5*	6	12	13	10*	7	14	18	15	9	16	18	15*
	4	9	13	10*	4	9	13	10*	5	11	18	15*					7	16.5	26.5	22.5*
0.15 $\mu$ F	5	10.5	10.3	7.5*	5	10.5	10.3	7.5*	6	12.5	18	15	8	15	18	15*	8.5	18.5	26.5	22.5
	5	11	13	10*	5	11	13	10*					6	15	26.5	22.5*				
0.22 $\mu$ F	6	12	13	10*	6	12	13	10*	7	14	18	15	9	16	18	15*	11	21	26.5	22.5*
	5	11	18	15*	5	11	18	15*					7	16.5	26.5	22.5*	11	21	31.5	27.5*
0.33 $\mu$ F	6	12.5	18	15	6	12.5	18	15	8	15	18	15*	8.5	18.5	26.5	22.5	11	21	31.5	27.5
									6	15	26.5	22.5*								
0.47 $\mu$ F	7	14	18	15	7	14	18	15	7	16.5	26.5	22.5	10.5	19	26.5	22.5*	13	24	31.5	27.5
													11	21	31.5	27.5*				
0.68 $\mu$ F	8	15	18	15*	8	15	18	15*	8.5	18.5	26.5	22.5	11	21	31.5	27.5	17	29	31.5	27.5
	6	15	26.5	22.5*	6	15	26.5	22.5*												
1.0 $\mu$ F	7	16.5	26.5	22.5	7	16.5	26.5	22.5	11	21	26.5	22.5*	13	24	31.5	27.5	17	29	41.5	37.5
									11	21	31.5	27.5*								
1.5 "	10.5	19	26.5	22.5	10.5	19	26.5	22.5	11	21	31.5	27.5	15	26	31.5	27.5	20	39.5	41.5	37.5
2.2 "	11	21	26.5	22.5*	11	21	26.5	22.5*	15	26	31.5	27.5	17	29	41.5	37.5	24	45.5	41.5	37.5
	11	21	31.5	27.5*	11	21	31.5	27.5*												
3.3 "	13	24	31.5	27.5	13	24	31.5	27.5	17	29	31.5	27.5*	19	32	41.5	37.5				
									17	29	41.5	37.5*								
4.7 "	13	24	31.5	27.5	15	26	31.5	27.5	19	32	41.5	37.5	20	39.5	41.5	37.5				
6.8 "	15	26	31.5	27.5*	17	29	31.5	27.5*	20	39.5	41.5	37.5	24	45.5	41.5	37.5				
	13	24	41.5	37.5*	15	26	41.5	37.5*												
10 $\mu$ F	17	29	41.5	37.5	19	32	41.5	37.5	24	45.5	41.5	37.5								
15 "	19	32	41.5	37.5	20	39.5	41.5	37.5												
22 "	20	39.5	41.5	37.5	24	45.5	41.5	37.5												
33 "	24	45.5	41.5	37.5																

\* AC voltage:  $f \leq 400$  Hz;  $1.4 \times U_{rms} + UDC \leq U_r$


\*\* PCM = Printed circuit module = lead spacing

\* On ordering please state the required PCM (lead spacing)!  
If not specified, smaller PCM will be booked.

Dims. in mm.

Taped version see page 104.

$\phi$ d	PCM	W
0.5	7.5	$\leq 3$
0.6	7.5	$\geq 4$
0.6	10	
0.8	15 - 27.5	
1.0	37.5	

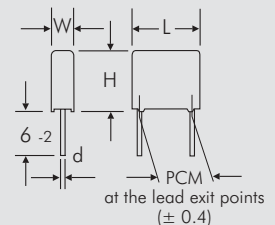

Rights reserved to amend design data without prior notification.






Continuation page 66

# WIMA MKP 4









## Continuation

Permissible AC voltage in relation to frequency at 10° C internal temperature rise (general guide).

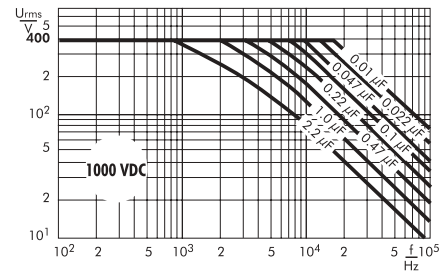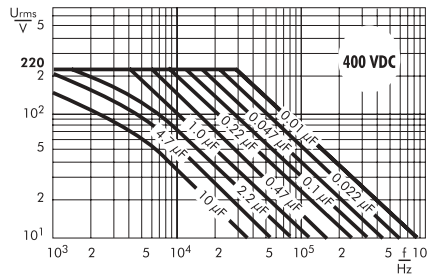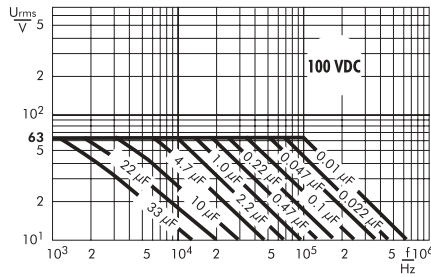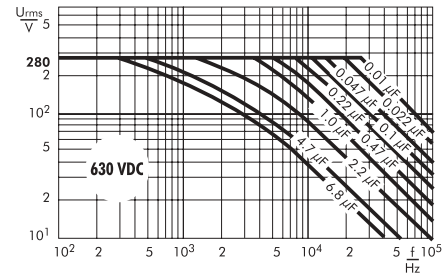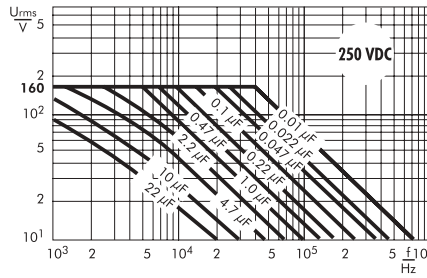

# WIMA MKS 4

Permissible AC voltage in relation to frequency at 10° C internal temperature rise (general guide).

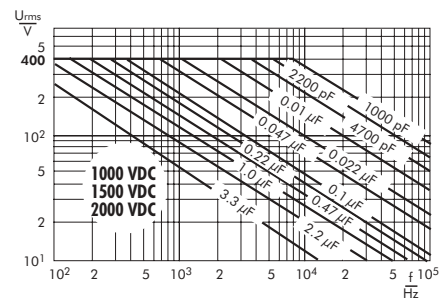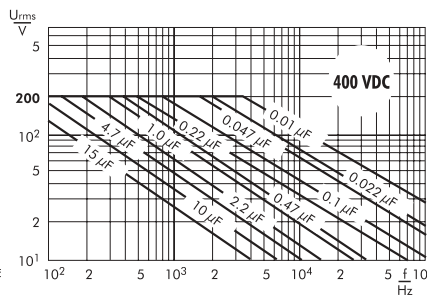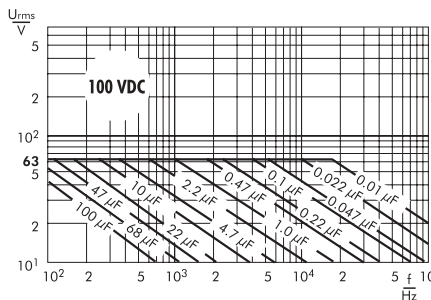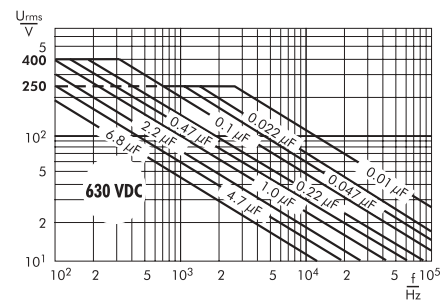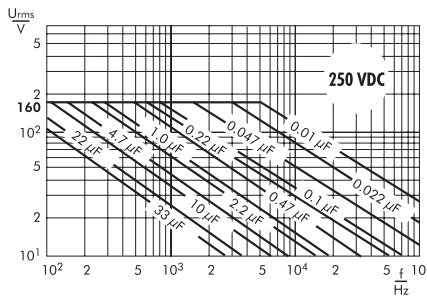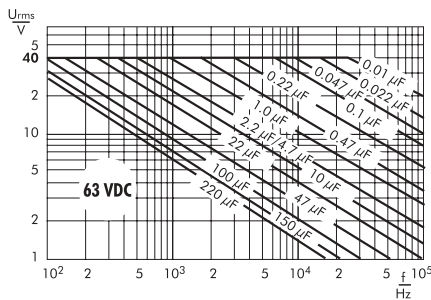

Technical information and general data see page 57.

## Recommendation for Processing and Application of Through-Hole Capacitors

### Soldering Process


A preheating of through-hole WIMA capacitors is allowed for temperatures  $T_{max} < 100^{\circ}C$ .  
In practice a preheating duration of  $t < 5$  min. has been proven to be best.

#### Single wave soldering

Soldering bath temperature:  $T < 260^{\circ}C$   
Immersion time:  $t < 5$  sec

#### Double wave soldering

Soldering bath temperature:  $T < 260^{\circ}C$   
Immersion time:  $2 \times t < 3$  sec

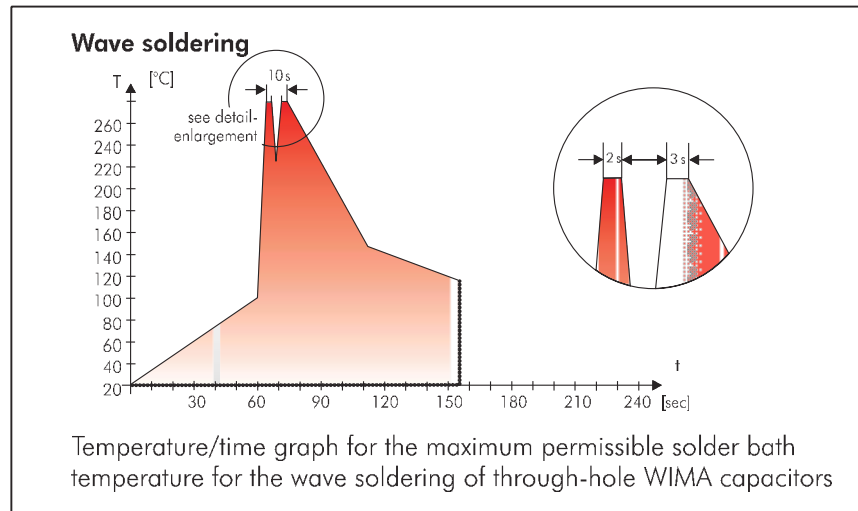

## WIMA Quality and Environmental Philosophy

### ISO 9001:2000 Certification

ISO 9001:2000 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2000 of our factories by the VDE inspectorate certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

### WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application of WPCS during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- lead attachment
- cast resin preparation/encapsulation
- 100% final inspection
- AQL check

### WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- foamed polystyrene (Styropor®)
- adhesive tapes made of plastic
- metal clips

### RoHS Compliance

According to the RoHS Directive 2002/95/EC certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2002/95/EG

WIMA capacitors are lead free in accordance with RoHS 2002/95/EC

Tape for lead-free WIMA capacitors

### DIN EN ISO 14001:2005

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2005. The certification has been granted in June 2006.

# Typical Dimensions for Taping Configuration

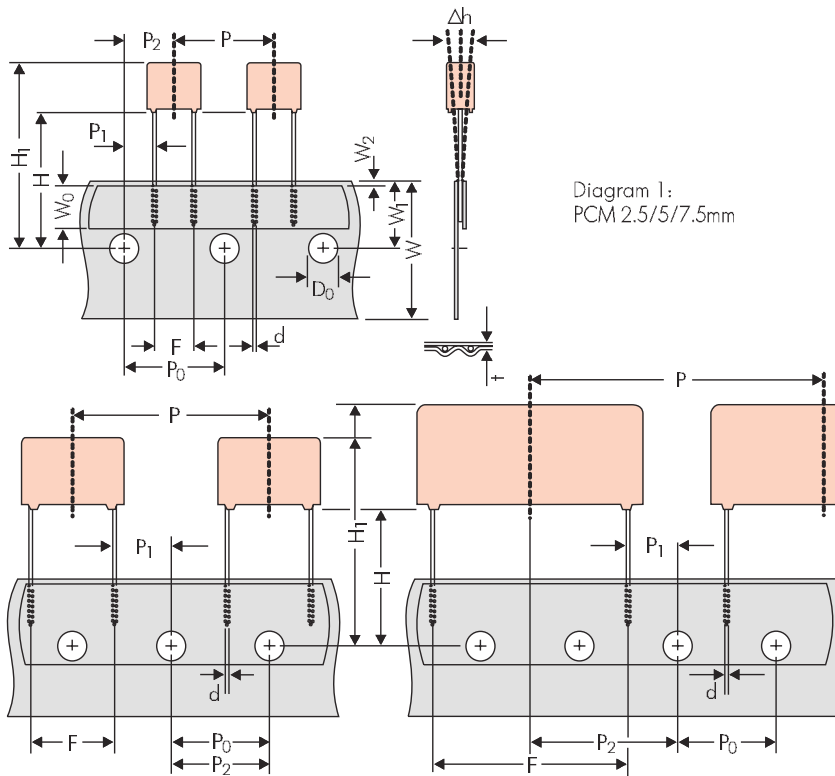


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5\*mm

\*PCM 27.5 taping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping							
		PCM 2.5 taping	PCM 5 taping	PCM 7.5 taping	PCM 10 taping*	PCM 15 taping*	PCM 22.5 taping	PCM 27.5 taping	
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	
Hold-down tape width	W <sub>0</sub>	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	
Hole position	W <sub>1</sub>	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	
Hold-down tape position	W <sub>2</sub>	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	
Feed hole diameter	D <sub>0</sub>	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5	
Feed hole pitch	P <sub>0</sub>	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	
Feed hole centre to lead	P <sub>1</sub>	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7	
Hole centre to component centre	P <sub>2</sub>	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3	
Feed hole centre to bottom edge of the component	H <sub>▲</sub>	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	
Feed hole centre to top edge of the component	H <sub>1</sub>	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 24.5 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 25.0 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 26.0 to 37.0	H+H <sub>component</sub> < H <sub>1</sub> 30.0 to 43.0	H+H <sub>component</sub> < H <sub>1</sub> 35.0 to 45.0	
Lead spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 <sup>+0.3</sup> <sub>-0.2</sub>	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8	
Lead diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	
Total tape thickness	t	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	
Package (see also page 1051)	▲	ROLL/AMMO			AMMO				
		REEL ø 360 max. ø 30 ±1	B 52 ±2 58 ±2	} depending on compo. dimensions	REEL ø 360 max. ø 30 ±1	52 ±2 58 ±2 or 66 ±2	REEL ø 500 max. ø 25 ±1	54 ±2 60 ±2 68 ±2	} depending on PCM and compoener* dimensions
Unit see details page 107.									

▲ Please give „H“ dimensions and desired packaging type when ordering.

▪ Diameter of leads see General Data.

\* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 sketch 11. P<sub>0</sub> = 12.7 or 15.0 is possible

Dims in mm.

Please clarify customer-specific deviations with the manufacturer.