



Bench and Desktop Fume Cabinets

Contain and filter for a cleaner, healthier working environment within dental labs, electronic design and rework, pharmaceutical labs, design and technology, science in education and more..... For use in numerous situations where external venting is impractical but where contaminant capture and filtration is necessary.

Applications include the filtration of fumes, vapour and particulates emanating from:

Monomers, adhesives, hazardous powders/particulates, conformal coatings, resins, sealants, solders, light grinding particles and dusts, organic solvents etc.

T500S-C and T700S-C Air Filtration Cabinets



Demonstrating adequate control of the risks to the health of employees, students and the general public, from dusts, powders, mists, fumes and vapours is the fundamental requirement of the Control of Substances Hazardous to Health (COSHH) regulations 2002 and 2004.



TechFlo Air Filtration Units Model No's T500S-C and T700S-C

NOTE: These units are recirculatory; i.e. filtered air is exhausted back into the workplace.

Description

Fan/filter casing (steel construction finished in dove grey) – clear PETG folding plastic fume shield – particulate (Intake Filter) – bonded carbon filter – centrifugal blower(s) (T700-C has 2 Blowers) , external rotor motor type brushless, UL, VDE and CSA approved - sealed electrical wiring and switch, downstream of filters.

Note: T700S-C has a dual airspeed function to facilitate higher vapour adsorption.


Operation

All WS filtration and extraction systems carry a lifetime warranty, are quiet in operation and can be assembled in seconds. Place onto a desk, bench or trolley and then simply plug in and switch on.

The folding PETG shield can be stored if not required thus reducing the unit footprint considerably. Handling and / or use of potentially harmful substances is carried out in front of the intake filter area. Cleaned air is vented to the top rear of the units

'A' Dimensions = T500S-C (Weight 25kgs)

'B' Dimensions = T700S-C (Weight 37kgs)

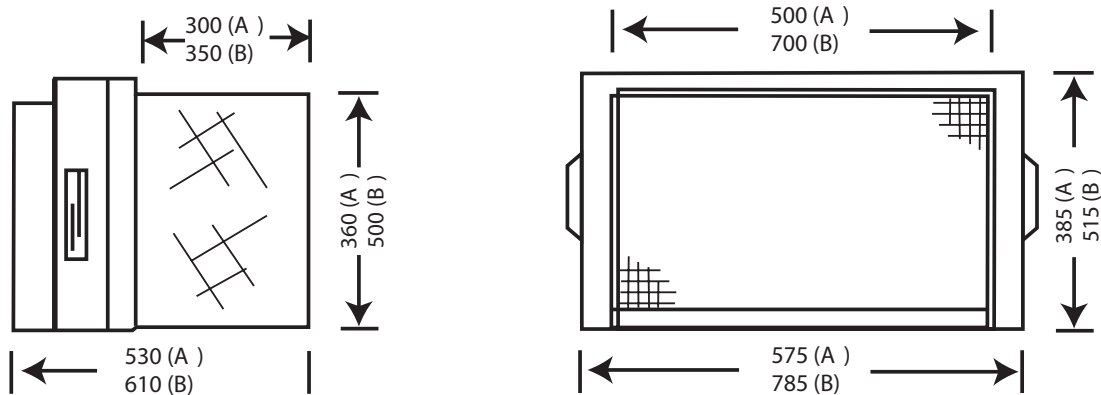

Filtration

The particulate (intake) filter is a three stage graduated fibre filter (filtration to 5.0 micron particles) with a high 'dust' holding capacity for long life. (Optional HEPA filters available to 0.3micron particles). This is followed by a high grade bonded carbon filter. (3.5kg T500 and 7kg T700)

Through the process of filtration, adsorption and dilution, operator exposure to potentially hazardous substances is vastly reduced or eliminated

Specification

Model Number	Fan Motor* Spec	Air Volume At Free Air	Ave. Air Velocity At Filter Face	Ave. Air Velocity At Shield Face	Noise Level LAeq dB(A)
T500S-C	230V 50Hz 105W	355 m3/hr	0.50 m/sec	0.38 m/sec	60
T700S-C	230V 50Hz 210W	710 m3/hr	0.55 m/sec	0.50 m/sec	62

* 110 Volts 50 or 60Hz available if required

These units are designed for immediate operator protection from concentrations of airborne contaminants whereby all gases, fumes, vapours and particulates at the front of the unit are drawn into the intake filter.

Cleaned air is exhausted to the top rear of the cabinet. See TechFlo (T660's and T930's) Fume Hoods and Cabinets for higher specification requirements.

Please contact WS for advice on the choice of machine for any given situation.

WS Ltd, Unit 1 Levens Hall Park, Lund Lane, Harrogate, HG3 2BG, UK

T: +44 (0) 1423 522836 F: +44 (0) 1423 525656

E: enquiries@widespreadsolutions.co.uk Web: www.widespreadsolutions.co.uk