

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1002  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,60 - 1,95  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1002 0,50 / 15324976		1,78	80	0,95	0,05	1,80	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

1002:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: ECTFE, ETFE, PBT, PTFE, PUR, TFE  
 Insul. Wall Designator: THIN

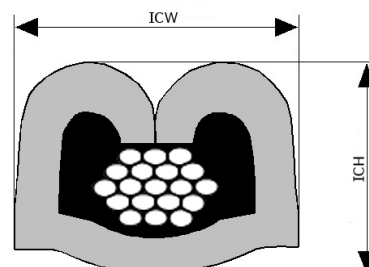

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35 | 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1005  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,45 - 1,88  
 Seal(s): 15324976 | 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,35 / 15324974		1,60	55	0,90	0,05	1,80	0,10	3,60	0,10	4,10	0,10
1005 0,50 / 15324976		1,74	80	0,95	0,05	1,80	0,10	3,60	0,10	4,10	0,10

Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN

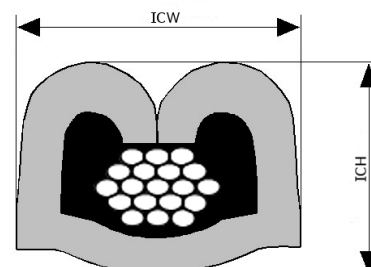

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1005  
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]  
 Insulation Range  $\Phi$ [mm]: 1,45 - 1,75  
 Seal(s): 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,35 / 15324974		1,60	55	0,90	0,05	1,80	0,10	3,60	0,10	4,10	0,10

## Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN

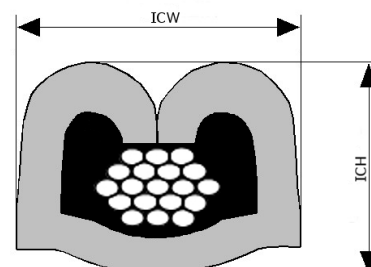

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1005  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 1,60 - 1,88  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,50 / 15324976		1,74	80	0,95	0,05	1,80	0,10	3,60	0,10	4,10	0,10

## Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN

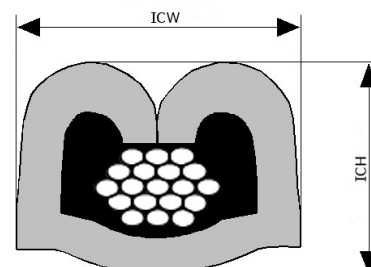

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35 | 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1007  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,80 - 2,30  
 Seal(s): 15324973 | 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,35 / 15324976		1,95	55	0,90	0,05	1,80	0,10	3,60	0,10	4,10	0,10
1007 0,50 / 15324973		2,15	80	0,95	0,05	1,80	0,10	3,70	0,10	4,10	0,10

Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR

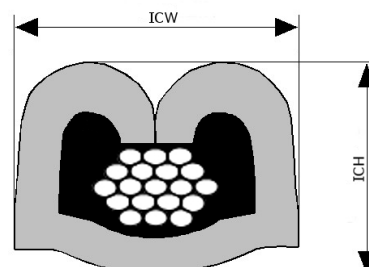

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1007  
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]  
 Insulation Range  $\Phi$ [mm]: 1,80 - 2,10  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,35 / 15324976		1,95	55	0,90	0,05	1,80	0,10	3,60	0,10	4,10	0,10

## Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR

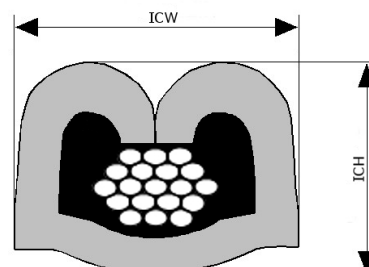

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1007  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,30  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,50 / 15324973		2,15	80	0,95	0,05	1,80	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR

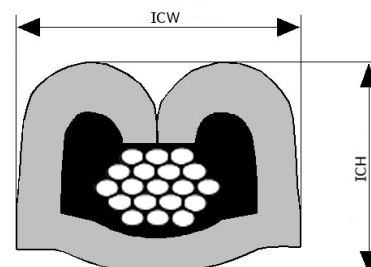

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50 | 0,51

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1009  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,30 - 2,60  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,50 / 15324973		2,45	80	0,95	0,05	1,80	0,10	3,70	0,10	4,10	0,10
1009 0,51 / 15324973		2,45	80	0,95	0,05	1,80	0,10	3,70	0,10	4,10	0,10

Cable type code legend:

1009:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: SPECIAL

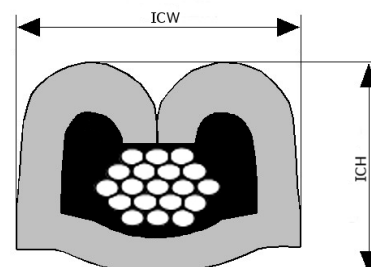



# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1009  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 2,30 - 2,60  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,50 / 15324973		2,45	80	0,95	0,05	1,80	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

1009:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: SPECIAL

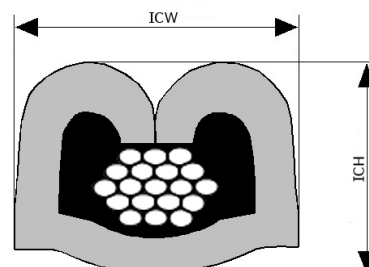

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1011  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,65 - 2,90  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1011 0,50 / 15324973		2,78	80	0,95	0,05	1,80	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

1011:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: EAE, POLYOLEFIN, PVC, TPE, XLPE  
 Insul. Wall Designator: HEAVY DUTY

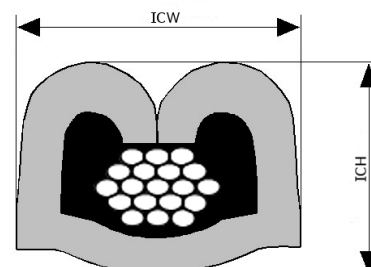

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1011  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 2,65 - 2,90  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1011 0,50 / 15324973		2,78	80	0,95	0,05	1,80	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

1011:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: EAE, POLYOLEFIN, PVC, TPE, XLPE  
 Insul. Wall Designator: HEAVY DUTY

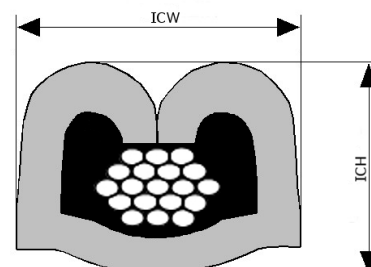

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1023  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,05 - 1,35  
 Seal(s): 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1023 0,35 / 15324974		1,20	60	0,90	0,05	1,80	0,10	3,60	0,10	4,00	0,10

## Cable type code legend:

1023:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: ECTFE, ETFE, PTFE, PUR, TFE  
 Insul. Wall Designator: ULTRA THIN

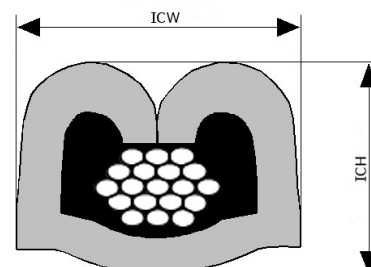

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35 | 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1025  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,47 - 1,85  
 Seal(s): 15324974 | 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,35 / 15324974		1,55	55	0,90	0,05	1,80	0,10	3,60	0,10	4,10	0,10
1025 0,50 / 15324976		1,73	80	0,90	0,05	1,80	0,10	3,60	0,10	4,00	0,10

Cable type code legend:

1025:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE  
 Insul. Wall Designator: THIN

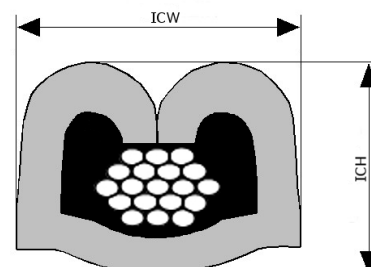

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1026  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,30  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 0,50 / 15324973		2,15	80	0,95	0,05	1,80	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

1026:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: HDPE, PVC, XLPE  
 Insul. Wall Designator: REGULAR

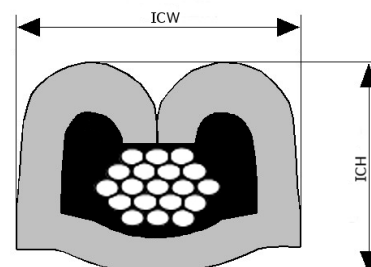

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1027  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,30 - 2,60  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1027 0,50 / 15324973		2,45	80	0,95	0,05	1,80	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

1027:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: SPECIAL

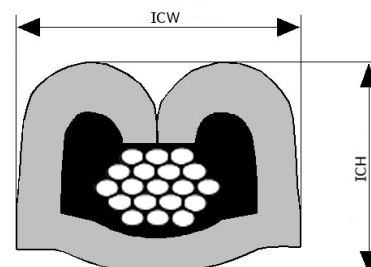

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1035  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,30  
 Seal(s): 15324979

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1035 0,50 / 15324979		2,15	80	1,10	0,05	1,85	0,10	3,80	0,10	4,00	0,10

## Cable type code legend:

1035:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: XLPE  
 Insul. Wall Designator: REGULAR

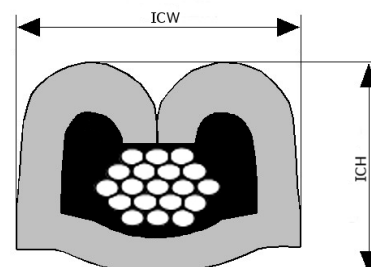



# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1045  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,40 - 1,75  
 Seal(s): 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1045 0,35 / 15324974		1,58	70	0,90	0,05	1,80	0,10	3,60	0,10	4,10	0,10

## Cable type code legend:

1045:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: ECTFE, ETFE, PTFE, PUR, TFE  
 Insul. Wall Designator: THIN

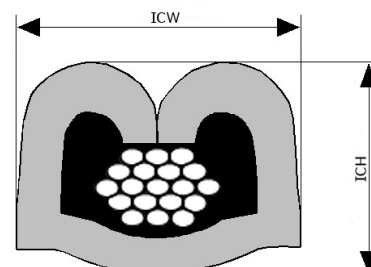

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1047  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,40 - 1,75  
 Seal(s): 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1047 0,35 / 15324974		1,58	70	0,90	0,05	1,80	0,10	3,60	0,10	4,10	0,10

## Cable type code legend:

1047:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: THIN

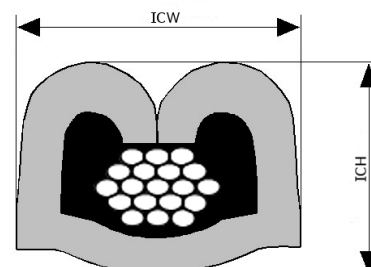

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1047  
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]  
 Insulation Range  $\Phi$ [mm]: 1,40 - 1,75  
 Seal(s): 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1047 0,35 / 15324974		1,58	70	0,90	0,05	1,80	0,10	3,60	0,10	4,10	0,10

## Cable type code legend:

1047:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: THIN

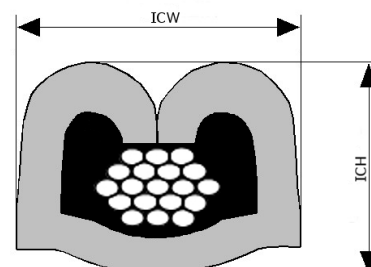

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1048  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,80 - 2,10  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1048 0,35 / 15324976		1,95	70	0,90	0,05	1,80	0,10	3,60	0,10	4,10	0,10

## Cable type code legend:

1048:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: REGULAR

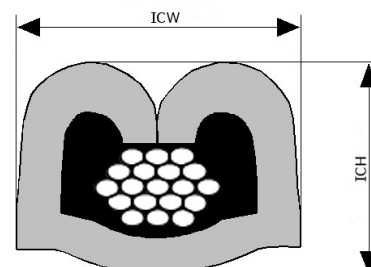

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1055  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,45 - 1,75  
 Seal(s): 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1055 0,35 / 15324974		1,60	70	0,90	0,05	1,80	0,10	3,60	0,10	4,10	0,10

## Cable type code legend:

1055:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: HDPE, PVC, XLPE  
 Insul. Wall Designator: THIN

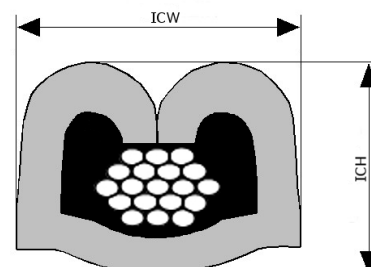

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1056  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,45 - 1,75  
 Seal(s): 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1056 0,35 / 15324974		1,60	60	0,90	0,05	1,80	0,10	3,50	0,10	3,90	0,10

## Cable type code legend:

1056:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NI  
 Insul. Material: FLUORPOLYM, PTFE  
 Insul. Wall Designator: THIN

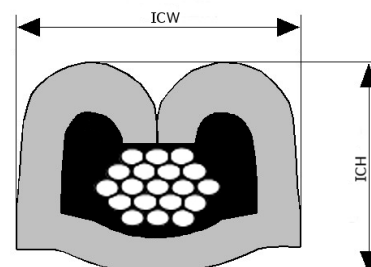

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1058  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,60 - 1,85  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1058 0,50 / 15324976		1,73	80	0,90	0,05	1,80	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

1058:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NI  
 Insul. Material: XLPE  
 Insul. Wall Designator: THIN

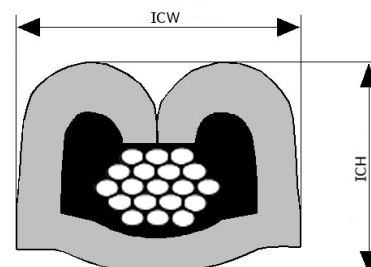

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1059  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,30  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1059 0,50 / 15324973		2,15	80	0,90	0,05	1,80	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

1059:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NI  
 Insul. Material: XLPE  
 Insul. Wall Designator: REGULAR

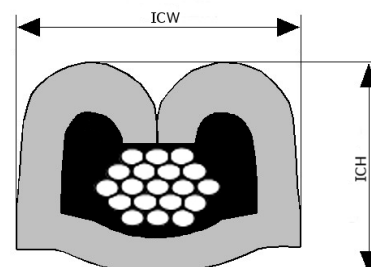



# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80 | 1,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1066  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 0,00 - 0,00  
 Seal(s): 12124669

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1066 0,80 / 12124669		0,00	90	1,05	0,05	1,85	0,10	3,80	0,10	4,00	0,10
1066 1,00 / 12124669		0,00	120	1,30	0,05	1,85	0,10	3,80	0,10	4,00	0,10

Cable type code legend:

1066:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: NONE  
 Insul. Wall Designator: NONE

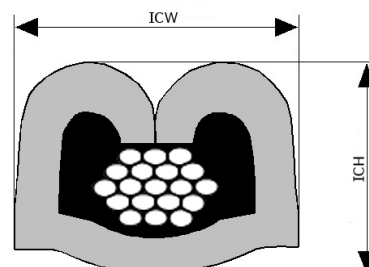

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1092  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,30  
 Seal(s): 15324979

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1092 0,50 / 15324979		2,15	80	1,10	0,05	1,85	0,10	3,80	0,10	4,00	0,10

## Cable type code legend:

1092:

Industry Designator: SAE  
 Conductor Material: ALLOY  
 Conductor Plating: NONE  
 Insul. Material: XLPE  
 Insul. Wall Designator: REGULAR

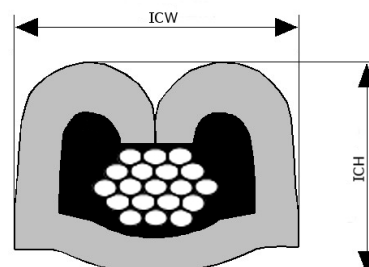

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1094  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,35 - 2,50  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 0,50 / 15324973		2,43	80	0,95	0,05	1,80	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

1094:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: HEAVY DUTY

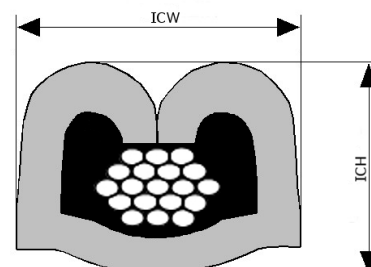

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1094  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 2,35 - 2,50  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 0,50 / 15324973		2,43	80	0,95	0,05	1,80	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

1094:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: HEAVY DUTY

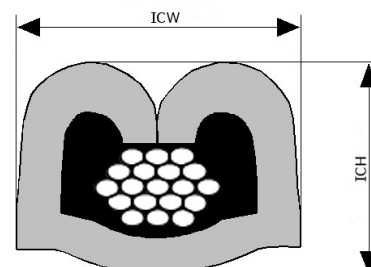

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1106  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,20  
 Seal(s): 15324979

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1106 0,50 / 15324979		2,10	80	1,10	0,05	1,85	0,10	3,80	0,10	4,00	0,10

## Cable type code legend:

1106:

Industry Designator: SAE  
 Conductor Material: ALLOY  
 Conductor Plating: NONE  
 Insul. Material: XLPE  
 Insul. Wall Designator: REGULAR

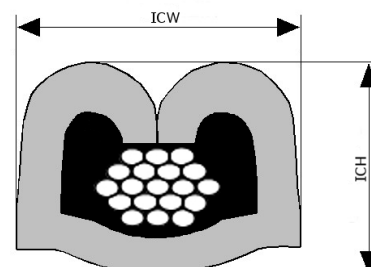

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2005  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,40 - 1,95  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2005 0,50 / 15324976		1,68	80	0,95	0,05	1,80	0,10	3,60	0,10	4,00	0,10

## Cable type code legend:

2005: FLR2X (SAAB C)  
 Industry Designator: ISO  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, TPE, XLPE  
 Insul. Wall Designator: THIN

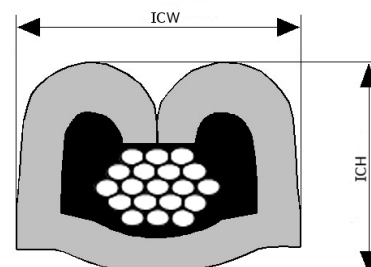

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35 | 0,50 | 0,75

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2010  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,20 - 1,90  
 Seal(s): 15324974 | 12089442 | 10737671

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,35 / 15324974		1,34	50	1,00	0,05	1,55	0,10	3,70	0,10	4,10	0,10
2010 0,50 / 15324974		1,50	80	1,10	0,05	1,60	0,10	3,80	0,10	4,10	0,10
2010 0,50 / 12089442		1,50	80	1,10	0,05	1,60	0,10	3,80	0,10	4,10	0,10
2010 0,50 / 10737671		1,50	80	1,10	0,05	1,60	0,10	3,10	0,10	4,10	0,10
2010 0,75 / 15324974		1,75	120	1,20	0,05	1,60	0,10	3,90	0,10	4,15	0,10

## Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

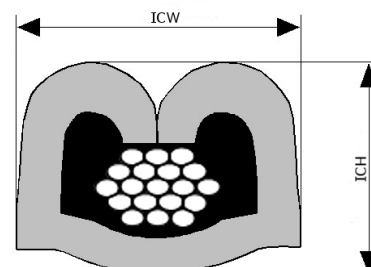

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35 | 0,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2011  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,79 - 2,30  
 Seal(s): 15393249 | 12052924

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2011 0,35 / 15393249		1,95	55	0,90	0,05	1,85	0,10	3,60	0,10	4,10	0,10
2011 0,50 / 12052924		2,15	101	0,95	0,05	1,80	0,10	3,60	0,10	4,00	0,10

## Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: P/EST, PE, PVC, XLPE  
 Insul. Wall Designator: REGULAR

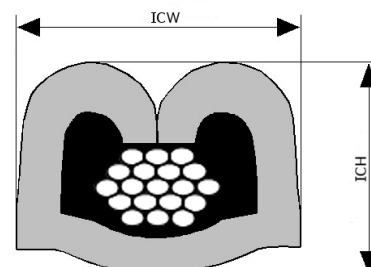



# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 2013  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,80 - 1,90  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2013 0,50 / 15324976		1,85	80	1,00	0,05	1,80	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

2013:

Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PUR, PVC, SYNTHRESIN, XLPE, XLPE/PVDF  
 Insul. Wall Designator: THIN

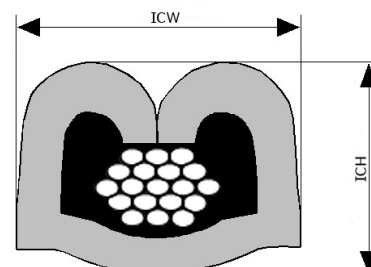

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.*

*For more information, please  
 consult your local sales office*



Cable Type codes: 2013  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 1,80 - 1,90  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2013 0,50 / 15324976		1,85	80	1,00	0,05	1,80	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

2013:

Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PUR, PVC, SYNTHRESIN, XLPE, XLPE/PVDF  
 Insul. Wall Designator: THIN

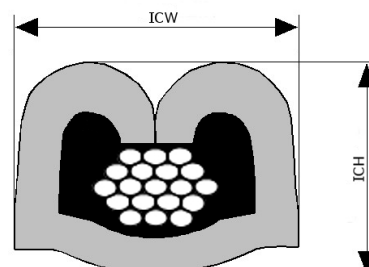

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2016  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 0,75 - 1,00  
 Seal(s): 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2016 0,50 / 15324974		0,88	75	0,95	0,05	1,80	0,10	3,50	0,10	4,10	0,10

## Cable type code legend:

2016: DIN-CORE  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: NONE  
 Insul. Wall Designator: NONE

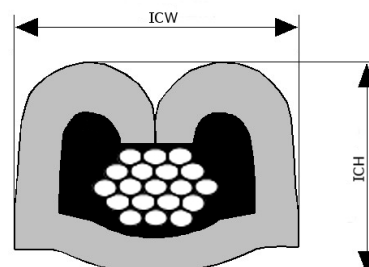

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2017  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,30 - 1,70  
 Seal(s): 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 0,50 / 15324974		1,50	80	1,10	0,05	1,60	0,10	3,80	0,10	4,10	0,10

## Cable type code legend:

2017: FLR41X-B, FLRY-A  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PA, PP, PVC, XLPE  
 Insul. Wall Designator: THIN

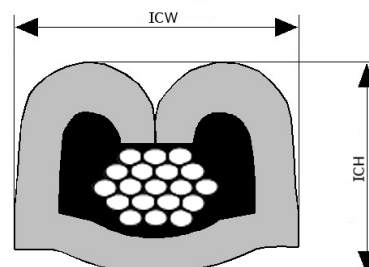

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2019  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,30 - 1,70  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2019 0,50 / 15324976		1,50	80	0,95	0,05	1,80	0,10	3,80	0,10	4,10	0,10

## Cable type code legend:

2019: FL7Y 179, FLR7Y, FLR7Y-A, FLR7Y-B, FLU7Y  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: ETFE  
 Insul. Wall Designator: THIN

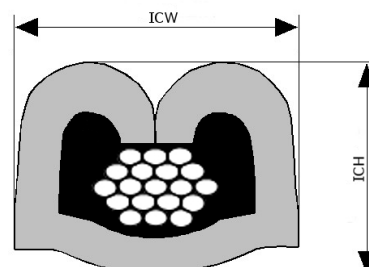

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35 | 0,50 | 0,60 | 0,75



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2044  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,25 - 1,90  
 Seal(s): 10737671 | 15324974 | 15344953

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2044 0,35 / 15344953		1,33	50	1,00	0,05	1,55	0,10	3,70	0,10	4,10	0,10
2044 0,50 / 10737671		1,50	80	1,10	0,05	1,60	0,10	3,20	0,10	4,10	0,10
2044 0,50 / 15324974		1,50	80	1,10	0,05	1,60	0,10	3,80	0,10	4,10	0,10
2044 0,50 / 15344953		1,50	80	1,10	0,05	1,60	0,10	3,80	0,10	4,10	0,10
2044 0,60 / 15344953		1,80	90	1,15	0,05	1,60	0,10	3,90	0,10	4,15	0,10
2044 0,75 / 15344953		1,78	120	1,20	0,05	1,60	0,10	4,00	0,10	4,15	0,10

## Cable type code legend:

2044: A3Z, F3Z, FL RENAULT A3Z  
 Industry Designator: NRA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: XLPA/PVDF, XLPE, X-POLY ZH  
 Insul. Wall Designator: THIN

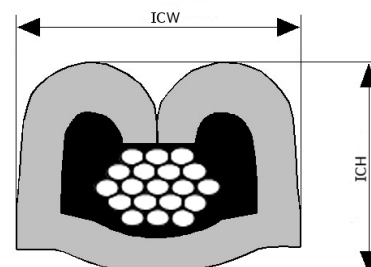

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 2050  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,00 - 2,30  
 Seal(s): 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2050 0,50 / 15324974		2,15	80	0,95	0,05	1,80	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

2050:

Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: EVA  
 Insul. Wall Designator: REGULAR

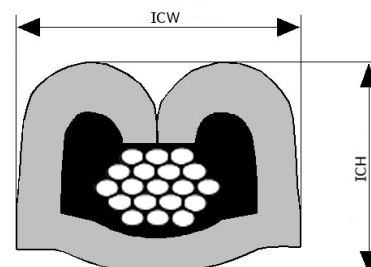

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2051  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,30 - 1,40  
 Seal(s): 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2051 0,50 / 15324974		1,35	75	0,95	0,05	1,80	0,10	3,40	0,10	4,10	0,10

## Cable type code legend:

2051: FLU7Y-A  
 Industry Designator: ISO  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: ETFE  
 Insul. Wall Designator: ULTRA THIN

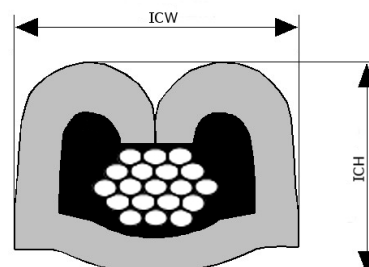



# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.*



*For more information, please  
 consult your local sales office*

Cable Type codes: 2053  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,40 - 1,60  
 Seal(s): 15327786 | 10737671

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2053 0,50 / 15327786		1,50	70	1,00	0,05	1,70	0,10	2,90	0,10	4,05	0,10
2053 0,50 / 10737671		1,50	70	1,00	0,05	1,70	0,10	2,90	0,10	4,05	0,10

## Cable type code legend:

2053: PSA T2 ZH ID, PSA T3 ZH ID, PSA T4 ZH ID  
 Industry Designator: PSA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: POLYOLEFIN, X-POLY  
 Insul. Wall Designator: ID

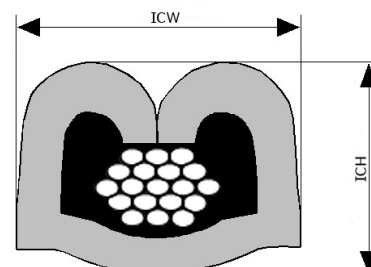

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2054  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,40 - 1,70  
 Seal(s): 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2054 0,50 / 15324974		1,55	70	1,00	0,05	1,70	0,10	3,30	0,10	4,15	0,10

## Cable type code legend:

2054: PSA T2 IR, PSA T3 IR, PSA T3 ZH IR, PSA T4 LH IR  
 Industry Designator: PSA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: POLYOLEFIN, PVC, X-POLY  
 Insul. Wall Designator: IR

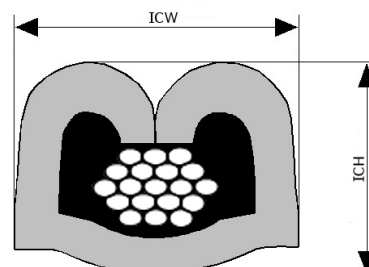

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,75



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2055  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,60 - 1,80  
 Seal(s): 15344953

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2055 0,75 / 15344953		1,70	120	1,20	0,05	1,60	0,10	4,00	0,10	4,15	0,10

## Cable type code legend:

2055: AGP0119, RENAULT F3Z  
 Industry Designator: NRA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: POLYOLEFIN  
 Insul. Wall Designator: THIN

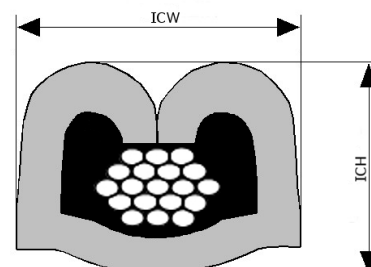

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35 | 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 2083  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,20 - 1,70  
 Seal(s): 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2083 0,35 / 15324974		1,30	55	0,90	0,05	1,85	0,10	3,60	0,10	4,10	0,10
2083 0,50 / 15324974		1,55	80	0,95	0,05	1,80	0,10	3,60	0,10	4,10	0,10

Cable type code legend:

2083:

Industry Designator: ISO  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC (YW)  
 Insul. Wall Designator: THIN

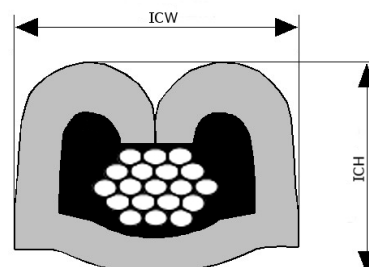

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 3000  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,40 - 2,50  
 Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3000 0,50 / 15324976		2,45	80	1,05	0,05	1,80	0,10	3,70	0,10	4,00	0,10

## Cable type code legend:

3000: AV  
 Industry Designator: JIS/JA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC  
 Insul. Wall Designator: REGULAR

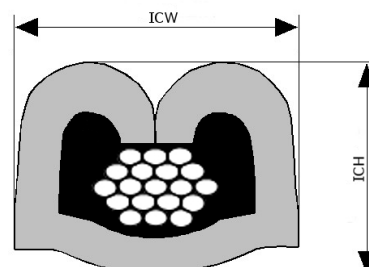

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,30 | 0,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 3004  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,30 - 1,70  
 Seal(s): 15324976 | 15324974 | 12052925

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 0,30 / 15324974		1,40	50	0,90	0,05	1,80	0,10	3,50	0,10	4,10	0,10
3004 0,30 / 15324976		1,40	50	0,90	0,05	1,80	0,10	3,20	0,10	4,00	0,10
3004 0,50 / 15324976		1,60	75	0,95	0,05	1,80	0,10	3,70	0,10	4,10	0,10
3004 0,50 / 15324974		1,60	75	0,95	0,05	1,80	0,10	3,40	0,10	4,00	0,10
3004 0,50 / 12052925		1,60	75	0,95	0,05	1,80	0,10	3,50	0,10	4,10	0,10

## Cable type code legend:

3004: AVSS  
 Industry Designator: JIS/JA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE, X-PVC  
 Insul. Wall Designator: THIN

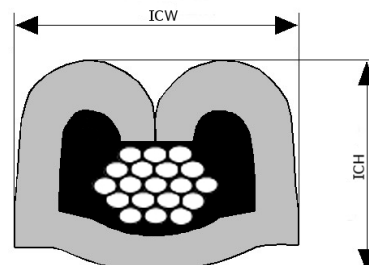

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 3004  
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED  
 Insulation Range  $\Phi$ [mm]: 1,50 - 1,70  
 Seal(s): 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 0,50 / 15324974		1,60	80	0,95	0,05	1,80	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

3004: AVSS  
 Industry Designator: JIS/JA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE, X-PVC  
 Insul. Wall Designator: THIN

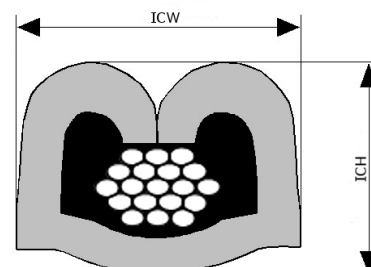

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 3022  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,80 - 2,20  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3022 0,50 / 15324973		2,00	75	0,95	0,05	1,80	0,10	3,60	0,10	4,10	0,10

## Cable type code legend:

3022:

Industry Designator: JIS/JA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: XLPE  
 Insul. Wall Designator: REGULAR

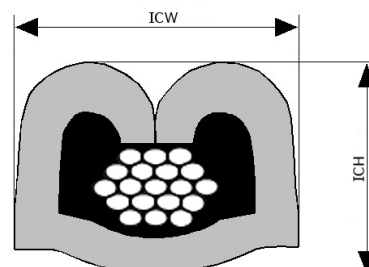



# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,30

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 3024  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 0,70 - 0,70  
 Seal(s): 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3024 0,30 / 15324974		0,70	50	0,90	0,05	1,80	0,10	3,50	0,10	4,10	0,10

## Cable type code legend:

3024:

Industry Designator: JIS/JA  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: NONE  
 Insul. Wall Designator: NONE

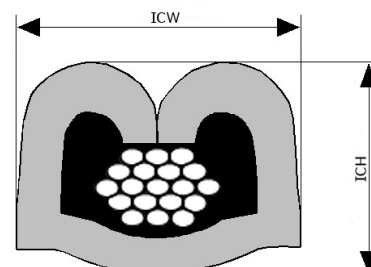

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35 | 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 8000  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,20 - 1,60  
 Seal(s): 15324974 | 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
8000 0,35 / 15324974		1,30	55	0,90	0,05	1,85	0,10	3,60	0,10	4,10	0,10
8000 0,50 / 15324976		1,50	80	0,95	0,05	1,80	0,10	3,80	0,10	4,10	0,10

Cable type code legend:

8000:

Industry Designator: N/G  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: SYNTHRESIN  
 Insul. Wall Designator: THIN

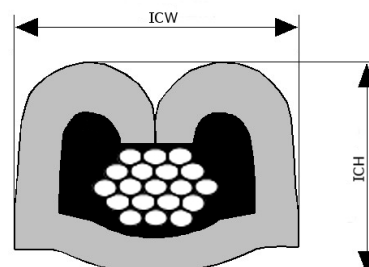

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 9000  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,90 - 2,05  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9000 0,50 / 15324973		1,98	80	0,95	0,05	1,80	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

9000:

Industry Designator: MISC  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVDF  
 Insul. Wall Designator: MIX

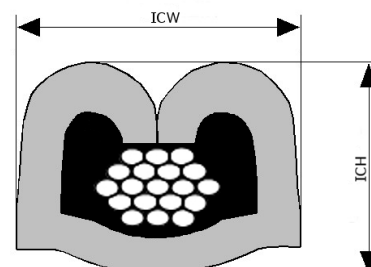

# Crimp Information Sheet

Terminal Part Number: 12084200  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 9003  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,92 - 2,06  
 Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 0,50 / 15324973		1,99	80	0,95	0,05	1,80	0,10	3,70	0,10	4,10	0,10

## Cable type code legend:

9003:

Industry Designator: N/G  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PVDF  
 Insul. Wall Designator: MIX

