



CIRCUIT BREAKER 3VA2 IEC FRAME 100 BREAKING CAPACITY CLASS C ICU=110KA @ 415 V 4POLE, LINE PROTECTION ETU550, LSI, IN=40A OVERLOAD PROTECTION IR=16A ...40A SHORT CIRCUIT PROTECTION ISD=0,6..10X IN, II=1,5..12X IN NEUTRAL PROTECTION ADJUSTABLE (OFF, UPTO 160%) CABLE CONNECTION

| Model                                                                                |   |                             |
|--------------------------------------------------------------------------------------|---|-----------------------------|
| product brand name                                                                   |   | SENTRON                     |
| Product designation                                                                  |   | Molded case circuit breaker |
| Design of the product                                                                |   | Line protection             |
| Product variations                                                                   |   | Selective Applications      |
| Ground fault monitoring version                                                      |   | Without                     |
| Design of the auxiliary release                                                      |   | without auxiliary release   |
| Design of the auxiliary switch                                                       |   | Without                     |
| Design of the operating mechanism                                                    |   | toggle handle               |
| Type of the driving mechanism / motor drive                                          |   | No                          |
| Design of the overcurrent release                                                    |   | ETU550                      |
| General technical data                                                               |   |                             |
| Number of poles                                                                      |   | 4                           |
| Trip class / of the L-trip / with I <sup>2</sup> t characteristic / initial value    |   | 0.5                         |
| Trip class / of the L-trip / with I <sup>2</sup> t characteristic / Full-scale value |   | 25                          |
| Electrical endurance (switching cycles)                                              |   | 12 000                      |
| • at AC-1 / at 380/415 V / at 50/60 Hz                                               |   |                             |
| circuit-breaker / Design                                                             |   | 3VA                         |
| Mechanical service life (switching cycles) / typical                                 |   | 20 000                      |
| Voltage                                                                              |   |                             |
| Insulation voltage / Rated value                                                     | V | 800                         |
| Protection class                                                                     |   |                             |

|                                                       |  |      |
|-------------------------------------------------------|--|------|
| <b>Protection class IP</b>                            |  | IP40 |
| Protection class IP / on the front                    |  | IP40 |
| <b>Protective function of the overcurrent release</b> |  | LSI  |

### Switching capacity

|                                                        |  |   |
|--------------------------------------------------------|--|---|
| <b>Switching capacity class of the circuit breaker</b> |  | C |
|--------------------------------------------------------|--|---|

### Dissipation

|                                                             |   |     |
|-------------------------------------------------------------|---|-----|
| <b>Active power loss</b>                                    |   |     |
| <ul style="list-style-type: none"> <li>• maximum</li> </ul> | W | 2.2 |

### Electricity

|                                                                                                |   |     |
|------------------------------------------------------------------------------------------------|---|-----|
| <b>Continuous current / Rated value / maximum</b>                                              | A | 100 |
| Continuous current / Rated value                                                               | A | 40  |
| Adjustable response value current / of the instantaneous short-circuit release / initial value | A | 1.5 |

### Main circuit

|                                                                                                                                                                                                                    |   |     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|-----|
| <b>Operating voltage</b>                                                                                                                                                                                           |   |     |
| <ul style="list-style-type: none"> <li>• with AC / at 50/60 Hz / Rated value</li> </ul>                                                                                                                            | V | 690 |
| <b>Operating current</b>                                                                                                                                                                                           |   |     |
| <ul style="list-style-type: none"> <li>• at 40 °C / Rated value</li> <li>• at 50 °C / Rated value</li> <li>• at 60 °C / Rated value</li> <li>• at 65 °C / Rated value</li> <li>• at 70 °C / Rated value</li> </ul> | A | 40  |
|                                                                                                                                                                                                                    | A | 40  |
|                                                                                                                                                                                                                    | A | 40  |
|                                                                                                                                                                                                                    | A | 40  |
|                                                                                                                                                                                                                    | A | 40  |

### Auxiliary circuit

|                                                       |  |   |
|-------------------------------------------------------|--|---|
| <b>Number of NC contacts / for auxiliary contacts</b> |  | 0 |
| <b>Number of NO contacts / for auxiliary contacts</b> |  | 0 |

### Suitability

|                            |  |                   |
|----------------------------|--|-------------------|
| <b>Suitability for use</b> |  | system protection |
|----------------------------|--|-------------------|

### Adjustable parameters

|                                                                                                                                                                                                                                                                                                                                                                                      |   |      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|------|
| <b>Adjustable response value current</b>                                                                                                                                                                                                                                                                                                                                             |   |      |
| <ul style="list-style-type: none"> <li>• of I-trip / Full-scale value</li> <li>• of the short-time delayed short-circuit release / initial value</li> <li>• of the short-time delayed short-circuit release / Full-scale value</li> <li>• of S-trip / with standard characteristic / initial value</li> <li>• of S-trip / with standard characteristic / Full-scale value</li> </ul> | A | 12   |
|                                                                                                                                                                                                                                                                                                                                                                                      | A | 0.6  |
|                                                                                                                                                                                                                                                                                                                                                                                      | A | 10   |
|                                                                                                                                                                                                                                                                                                                                                                                      | A | 0.6  |
|                                                                                                                                                                                                                                                                                                                                                                                      | A | 10   |
| <b>Adjustable delay time</b>                                                                                                                                                                                                                                                                                                                                                         |   |      |
| <ul style="list-style-type: none"> <li>• of S-trip / with I2t characteristic / initial value</li> </ul>                                                                                                                                                                                                                                                                              | s | 0.05 |

|                                                                                                      |   |      |
|------------------------------------------------------------------------------------------------------|---|------|
| • of S-trip / with I2t characteristic / Full-scale value                                             | s | 0.5  |
| • of S-trip / with standard characteristic / initial value                                           | s | 0.05 |
| • of S-trip / with standard characteristic / Full-scale value                                        | s | 0.5  |
| <b>Adjustable response value current / of the current-dependent overload release / initial value</b> | A | 0.4  |

### Product details

|                                                                                        |  |     |
|----------------------------------------------------------------------------------------|--|-----|
| <b>Product component</b>                                                               |  |     |
| • Trip indicator                                                                       |  | No  |
| • display                                                                              |  | Yes |
| • undervoltage release                                                                 |  | No  |
| <b>Product property</b>                                                                |  |     |
| • for neutral conductors / upgradeable/retrofitable / Short-circuit and overload proof |  | No  |
| Product expansion / optional / motor drive                                             |  | Yes |

### Product function

|                               |  |     |
|-------------------------------|--|-----|
| <b>Product function</b>       |  |     |
| • Intrinsic device protection |  | Yes |
| • communication function      |  | Yes |
| • Phase failure detection     |  | No  |
| • other measurement function  |  | No  |

### Accessories

|                                                                   |  |                                    |
|-------------------------------------------------------------------|--|------------------------------------|
| <b>Manufacturer article number / of the supplied basic switch</b> |  | <a href="#">3VA2040-7JP46-0AA0</a> |
|-------------------------------------------------------------------|--|------------------------------------|

### Short circuit

|                                                                  |    |     |
|------------------------------------------------------------------|----|-----|
| <b>Operational short-circuit current breaking capacity (Ics)</b> |    |     |
| • at 240 V / Rated value                                         | kA | 150 |
| • at 415 V / Rated value                                         | kA | 110 |
| • at 440 V / Rated value                                         | kA | 110 |
| • at 500 V / Rated value                                         | kA | 85  |
| • at 690 V / Rated value                                         | kA | 2   |
| <b>Maximum short-circuit current breaking capacity (Icu)</b>     |    |     |
| • at 240 V / Rated value                                         | kA | 150 |
| • at 415 V / Rated value                                         | kA | 110 |
| • at 440 V / Rated value                                         | kA | 110 |
| • at 500 V / Rated value                                         | kA | 85  |
| • at 690 V / Rated value                                         | kA | 2   |
| <b>Short-circuit current making capacity (Icm)</b>               |    |     |

- at 240 V / Rated value
- at 415 V / Rated value
- at 440 V / Rated value
- at 500 V / Rated value
- at 690 V / Rated value

|    |     |
|----|-----|
| kA | 330 |
| kA | 242 |
| kA | 242 |
| kA | 187 |
| kA | 3   |

### Connections

|                                                                                                |  |                              |
|------------------------------------------------------------------------------------------------|--|------------------------------|
| Arrangement of electrical connectors / for main current circuit                                |  | Front terminal               |
| Type of connectable conductor cross-section                                                    |  | 1 x (6-120 mm <sup>2</sup> ) |
| <ul style="list-style-type: none"> <li>• of the round conductor terminal / stranded</li> </ul> |  |                              |
| Type of electrical connection / for main current circuit                                       |  | Box terminal                 |

### Mechanical Design

|               |    |                |
|---------------|----|----------------|
| Height        | mm | 181            |
| Width         | mm | 140            |
| Depth         | mm | 107            |
| Mounting type |    | fixed mounting |

### Environmental conditions

|                                                                                |    |     |
|--------------------------------------------------------------------------------|----|-----|
| <b>Ambient temperature</b>                                                     |    |     |
| <ul style="list-style-type: none"> <li>• during operation / minimum</li> </ul> | °C | -25 |
| <ul style="list-style-type: none"> <li>• during operation / maximum</li> </ul> | °C | 70  |
| <ul style="list-style-type: none"> <li>• during storage / minimum</li> </ul>   | °C | -40 |
| <ul style="list-style-type: none"> <li>• during storage / maximum</li> </ul>   | °C | 80  |

### Certificates

|                                                                            |  |   |
|----------------------------------------------------------------------------|--|---|
| <b>Equipment marking</b>                                                   |  |   |
| <ul style="list-style-type: none"> <li>• acc. to DIN EN 61346-2</li> </ul> |  | Q |
| <ul style="list-style-type: none"> <li>• acc. to DIN EN 81346-2</li> </ul> |  | Q |

|                                 |            |                                  |                          |
|---------------------------------|------------|----------------------------------|--------------------------|
| <b>General Product Approval</b> | <b>EMC</b> | <b>Declaration of Conformity</b> | <b>Shipping Approval</b> |
|---------------------------------|------------|----------------------------------|--------------------------|



[other](#)



|                          |              |
|--------------------------|--------------|
| <b>Shipping Approval</b> | <b>other</b> |
|--------------------------|--------------|

[other](#)



GL

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA20407JP460AA0>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VA20407JP460AA0/all>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mfb=3VA20407JP460AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=3VA20407JP460AA0)

### CAX-Online-Generator

<http://www.siemens.com/cax>

### Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

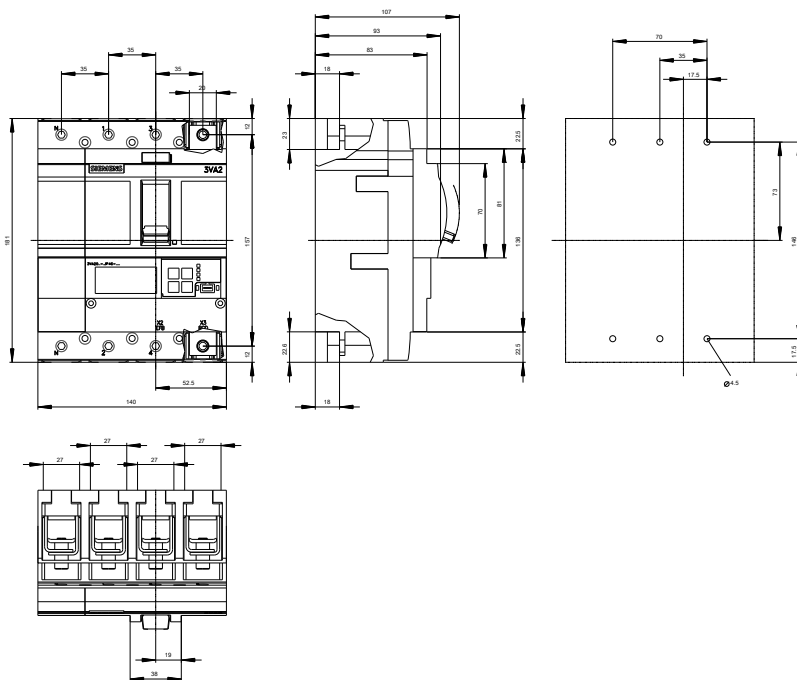



last modified:

11.03.2015