


# IEC Type U Glassfibre Insulated Flat Pair Cable / Wire with Stainless Steel Overbraid

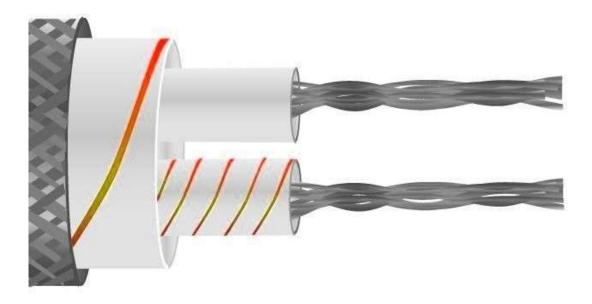

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockists of Thermocouple Cables. The Company has been trading since 1971 and is ISO 9001 accredited.

Labfacility have supplied Farnell for over 30 years, and an extensive range of our products are available to buy online, from stock, direct from Farnell.

# **Datasheet**



## **Specifications**

General Description Good strength to physical disturbance and high temper (up to 400°C). Will not prevent ingress of fluids.  Cable Length 10m, 25m, 50m, 100m  Cable Type Flat pair cable  Core / Strands 7/0.2mm  Conductor Cross Section 7/0.2 (mm2) + Colour Orange - Colour White  Drain Wire Insulation Material Glassfibre insulated extension cable with stainless steel overbraiding	ature			
Cable Length  Cable Type  Flat pair cable  Core / Strands  Conductor Cross Section  7/0.2 (mm2)  + Colour  Colour  Colour  Drain Wire  Insulation Material  Insulation Material  Insulation Material  Insulation Material  Communication Material  Insulation Material  Insulation Material  Communication Material  Insulation Material  Insulation Material  Communication Material  Insulation Material  Communication Material  Insulation Material  Communication Material  Insulation Material  Communication Material	Good strength to physical disturbance and high temperature			
Cable Type Flat pair cable  7/0.2mm  Conductor Cross Section 7/0.2 (mm2) Colour				
Core / Strands 7/0.2mm  Conductor Cross Section 7/0.2 (mm2)  + Colour Co	10m, 25m, 50m, 100m			
Conductor Cross Section 7/0.2 (mm2)  + Colour  - Colour  Drain Wire  Insulation Material  O.219  Orange  No  Glassfibre insulated extension cable with stainless steel				
7/0.2 (mm2) + Colour Orange - Colour White  Drain Wire No Insulation Material Glassfibre insulated extension cable with stainless steel				
+ Colour Orange  - Colour White  Drain Wire No  Insulation Material Glassfibre insulated extension cable with stainless steel				
- Colour White  Drain Wire No  Insulation Material Glassfibre insulated extension cable with stainless steel				
Drain Wire         No           Insulation Material         Glassfibre insulated extension cable with stainless steel				
Insulation Material Glassfibre insulated extension cable with stainless steel				
overbraiding				
Loop Resistance 7/0.2 0.2				
(Ohms per combined metre)				
Max. Temperature +350°C (short periods up to 400°C)				
Min. Temperature -60°C				
<b>+ Conductor</b> Copper				
- Conductor Copper Nickel				
<b>Screen</b> No				
Standards Met Colour code (cores & jacket) to IEC-584-3				
Thermocouple Type U				
Tolerance Class 2				

# **Ordering Information**

Туре	Colour Code	Cable Style	Strand Size	Length	Manufacturers Code	Farnell Order Code
U	IEC	GLASSFIBRE FLAT PAIR + SSOB	7/0.2mm	10m (32.8ft)	WU-105-D	3582386
U	IEC	GLASSFIBRE FLAT PAIR + SSOB	7/0.2mm	25m (82ft)	WU-105-D	4073316
U	IEC	GLASSFIBRE FLAT PAIR + SSOB	7/0.2mm	50m (164.1ft)	WU-105-D	4073341
U	IEC	GLASSFIBRE FLAT PAIR + SSOB	7/0.2mm	100m (328.1ft)	WU-105-D	4073301

TC Cable - 24 Nov-23



#### Thermocouple & PRT Cable

Thermocouple cables are available in IEC or ANSI colour codes. Insulation types include PFA, PTFE, PVC &

Fibreglass. Available spool lengths include 10, 25, 50, 100 and 200m.

## Best Sellers



**ANSI PTFE Insulated Twin Twisted** Farnell 2443696 Newark 73AC8304

**ANSI PFA Insulated** Twin Twisted Farnell 2443711 Newark 73AC8297

### **Fabricated and Specialist Thermocouples**

Styles include; Magnet, Washer, Nozzle, Leaf, Bayonet & Bolt thermocouple. Various lengths and calibration types available.


## **Best Sellers**



Washer Thermocouple Farnell 8597952 Newark 38K1555

**Bayonet** Thermocouple Farnell 2785115 Newark 37AC0993

> Magnet Thermocouple Farnell 2081298 Newark 88T2877



Including exposed junctions with fitted or moulded miniature plug and insulated leads, ideal for test and development applications.

1, 2, 3, 5 & 10m lengths available in IEC or ANSI colours.

## **Best Sellers**









#### Thermocouple Connectors

Range of miniature or standard thermocouple connectors. Available in thermocouple types K, J, T, E, N, RS, B, and copper. IEC, ANSI & JIS colour codes available.



**IEC Thermocouple PCB Socket** Farnell 2347056 **Newark 06X5514** 



**IEC Thermocouple** Plug

Farnell 7086362 Newark 67C1559



ANSI Thermocouple Socket

> Farnell 2347121 Newark 06X4819



#### **RTD Detectors**

Wire-wound type provides greater accuracy and stability but are vulnerable to shock.

Flat film type are resistant to shock and have quicker thermal response times.

Various lengths and diameters available, in class A, B and 1/10th Din.

## **Best Sellers**



Farnell 8598550 Newark 38K0883

#### PT100 Wire **Wound Detector**

Farnell 2770776 Newark 25AC2608

PT100 Class A Thin Film Detector Farnell 8598525

**Newark 38K0885** 

Mineral Insulated Thermocouples

Available in various calibration types with a variety of terminations.

These include; Thermocouple plugs, Terminal heads and Thermocouple cable.





IEC Thermocouple with Mini Plug

Farnell 4248338 Newark 19J1166

**IEC Melt Bolt** Thermocouple Farnell 2816490 Newark 44AC8638



Resistance Thermometer Detectors (RTD) / Platinum Resistance Thermometers (PRT)

To suit a wide range of applications and styles, available in class A or B.



Pt100 Heavy Duty Sensor Probe Farnell 8598096 Newark 38K0974

Pt100 Sensor in Stainless Steel Tube with Teflon Lead Farnell 2420300 Newark 53X3459

Pt100 Outdoor/ Cold Store Temperature Sensor Farnell 2816462

Newark 44AC8648

L60 Fine Wire

## Thermocouple Welder

The Thermocouple Welder is a compact, simple-to-use instrument designed for thermocouple and fine wire welding. Supplied with foot switch, spare electrodes, pliers & safety glasses, impact clip and pen plate.

## **Best Sellers**





L60+ Thermocouple & Fine Wire Welder and accessories Farnell 2897470 Newark 62AC8741

TC Cable - 24 Nov-23