SIEMENS

Data sheet 8WH9120-0AA00

PICK-OFF TERM. SECTION 10MM2 FOR HIGH-CURRENT TERMINALS, WITH 50 MM2, FULLY ISOL., ALLOWS A VOLTAGE TAP UP TO A NOM. VOLTAGE OF 1000 V, GRAY

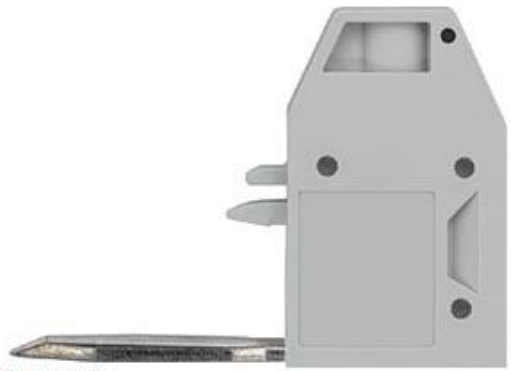

Figure similar

Model		
Design of terminal / Terminal levels internally linked		No
General technical data		
Insulation material		others
Protection class		
Combustibility class acc. to UL 94		others
Main circuit		
Operating current / Rated value	A	57
Appearance		
Color		grey
Product details		
Product component / required / connection plate		No
Number		
Number of terminal levels		1
Number of terminal points / per terminal level		1
Connections		
Connectable conductor cross-section		
• finely stranded		
— with core end processing / maximum	mm²	50
Type of electrical connection		
• 1		screw-type terminal
• 2		without

Position / of the terminal		others

Mechanical Design

Mounting type		others
Material / of the insulating body		Other

Environmental conditions

Ambient temperature		
• during operation / minimum	°C	-25
• during operation / maximum	°C	55

Certificates

General Product Approval			Declaration of Conformity
GOST	UL		EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8WH91200AA00

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/8WH91200AA00/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH91200AA00

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://ausschreibungstexte.siemens.com/tiplv

last modified: 11.03.2015