4mm connectors

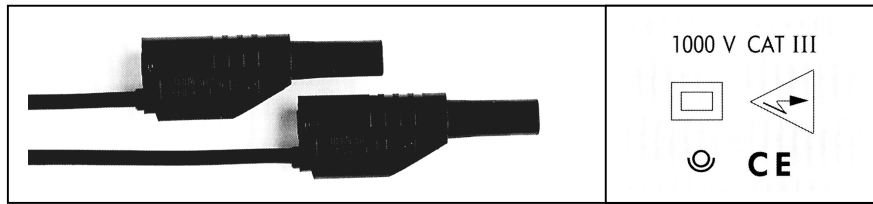| Order code	Manufacturer code	Description
17-2250	2612-IEC-25 RG	25CM RED STACKABLE SAFETY LEAD
17-2252	2612-IEC-50 RG	50CM RED STACKABLE SAFETY LEAD
17-2254	2612-IEC-100 RG	100CM RED STACK.SAFETY LEAD
17-2256	2612-IEC-200 RG	200CM RED STACK.SAFETY LEAD
17-2258	2612-IEC-25 NR	25CM BLACK STACK.SAFETY LEAD
17-2260	2612-IEC-50 NR	50CM BLACK STACK.SAFETY LEAD
17-2262	2612-IEC-100 NR	100CM BLACK STACK.SAFETY LEAD
17-2264	2612-IEC-200 NR	200CM BLACK STACK.SAFETY LEAD
17-2266	2612-IEC-100 BL	100CM BLUE STACK.SAFETY LEAD
17-2268	n/a	100CM GREEN STACK.SAFETY LEAD
17-2270	2612-IEC-100 JAU	100CM YELLOW STACK.SAFETY LEAD

Male to Male ∅ 4mm Stackable Safety Patchcord

4mm Stackable Safety Test Leads

Electro PJP – Standardised IEC 1010 Version

Photograph
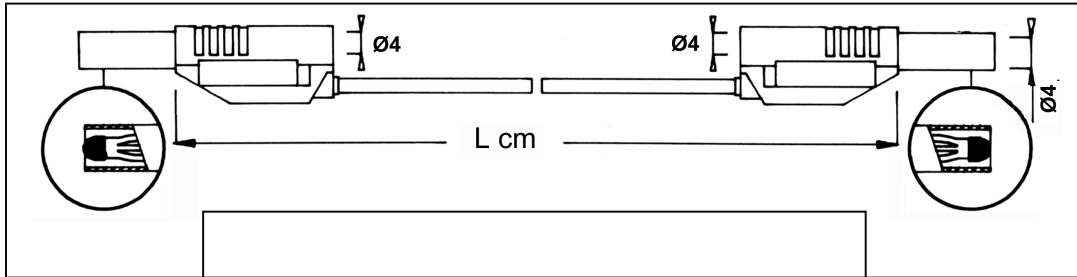

Specification

Cable insulation material	:	PVC
Connector insulation material	:	Polyamide
Connector contact material	:	Brass and bronze Ni
Cable cross sectional surface area	:	$1.00mm^2$
Voltage	:	1,000 V (Test 50/60 Hz 1mn > 7,400 V)
Maximum current	:	20 A
Overall contact resistance	:	25cm 12mΩ, 50cm 15mΩ, 100cm 20mΩ, 200cm 30mΩ
Temperature range	:	-20ºC to +80ºC

Technical Drawing

PJP Ref No.	Description	Length (cm)	Colour
2612-IEC-25-R	4mm Stackable Safety Test Lead	25	Red
2612-IEC-50-R	4mm Stackable Safety Test Lead	50	Red
2612-IEC-100-R	4mm Stackable Safety Test Lead	100	Red
2612-IEC-200-R	4mm Stackable Safety Test Lead	200	Red
2612-IEC-25-N	4mm Stackable Safety Test Lead	25	Black
2612-IEC-50-N	4mm Stackable Safety Test Lead	50	Black
2612-IEC-100-N	4mm Stackable Safety Test Lead	100	Black
2612-IEC-200-N	4mm Stackable Safety Test Lead	200	Black
2612-IEC-100-Bl	4mm Stackable Safety Test Lead	100	Blue
2612-IEC-100-V	4mm Stackable Safety Test Lead	100	Green
2612-IEC-100-J	4mm Stackable Safety Test Lead	100	Yellow