



### Model Number


**V19-G-BK5M-PVC-U**

Female cordset, M12, 8-pin, PVC cable

### Features

- UL Recognized Component
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold plated contacts
- Flame resistant cable
- Resistant to microbes and hydrolysis
- Degree of protection IP67 / IP68 / IP69K

### Dimensions

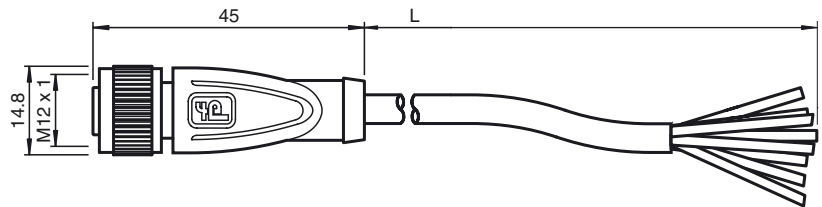

### Technical data

#### General specifications

Number of pins	8
UL File Number	E231213

#### Electrical specifications

Operating voltage	$U_B$	max. 30 V AC/DC
Operating current	$I_B$	max. 2 A
Volume resistance		< 5 m $\Omega$

#### Ambient conditions

Ambient temperature	Body: -40 ... 90 °C (-40 ... 194 °F) cable, flexing: -20 ... 80 °C (-4 ... 176 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F)
---------------------	---

Pollution degree	3
------------------	---

#### Mechanical specifications

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Degree of protection	IP67 / IP68 / IP69k
Material	
Contacts	CuSn / Au
Contact surface	Au
Body	TPU, black
Cable	PVC
Slotted nut	Diecast zinc
Seal	FKM
Core insulation	PP
Cable	extra-fine wire, flexible
Sheath diameter	$\varnothing$ 6.3 mm
Bending radius	> 10 x cable diameter, appropriate for conveyor chains > 5 x cable diameter, fixed
Color	black
Number of cores	8
Core cross-section	0.34 mm <sup>2</sup>
Conductor construction	42 x 0.1 mm $\varnothing$
Length	L 5 m
Flammability	
Contact carrier	HB
Housing	V-2


#### Compliance with standards and directives

Standard conformity	
Degree of protection	EN 60529:2000
Flammability	Grip: UL 94 Cable: UL 1581 Section 1100; IEC 60332-1-2:2004

#### Approvals and certificates

UL approval	UL Recognized General purpose
-------------	-------------------------------

### Electrical connection




1	.....	WH
2	.....	BN
3	.....	GN
4	.....	YE
5	.....	GY
6	.....	PK
7	.....	BU
8	.....	RD



Maximum permissible operating voltage  $\leq 30$  V

Maximum permissible ambient temperature  $\leq 80$  °C ( $\leq 176$  °F)



Release date: 2016-06-30 15:56 Date of issue: 2016-06-30 239998-0055\_eng.xml