

AMY-50-S-C

~18° spot beam. Assembly with holder C compatible with LEDiL HEKLA. Black version.

SPECIFICATION:

Dimensions	Ø 49.9 mm
Height	13 mm
Fastening	socket
ROHS compliant	yes 🛈



MATERIALS:

Component	Туре	Material	Colour	Finish
AMY-50-S	Single lens	PMMA		
AMY-50-HI D-C	Holder	PC	black	


ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CP17694_AMY-50-S-C	510	120	30	9.1

» Box size: 480 x 280 x 300 mm




PRODUCT DATASHEET CP17694_AMY-50-S-C

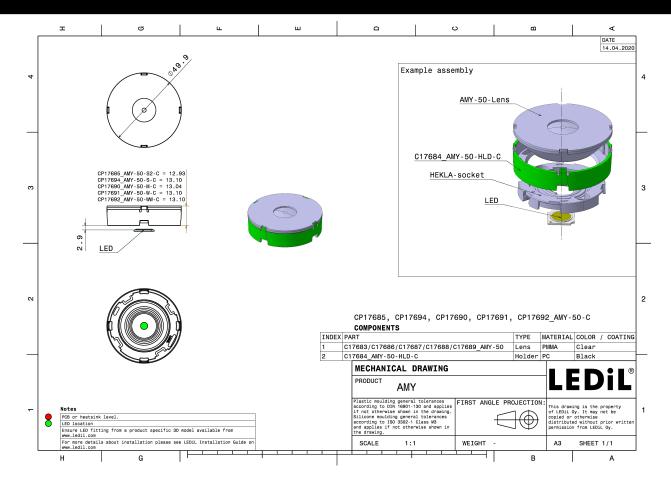


See also our general installation guide: www.ledil.com/installation_guide




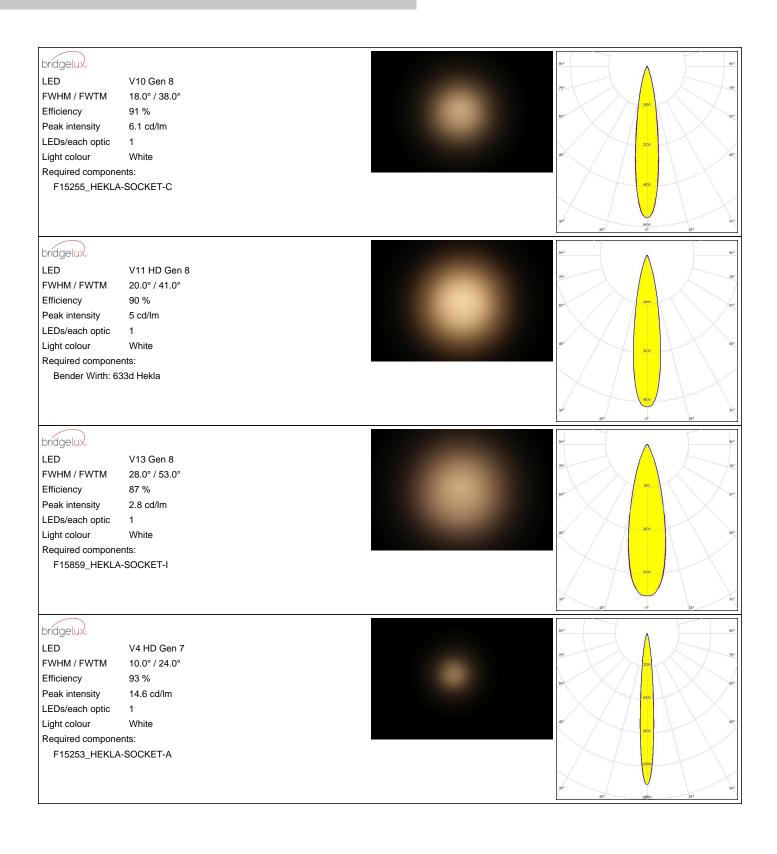




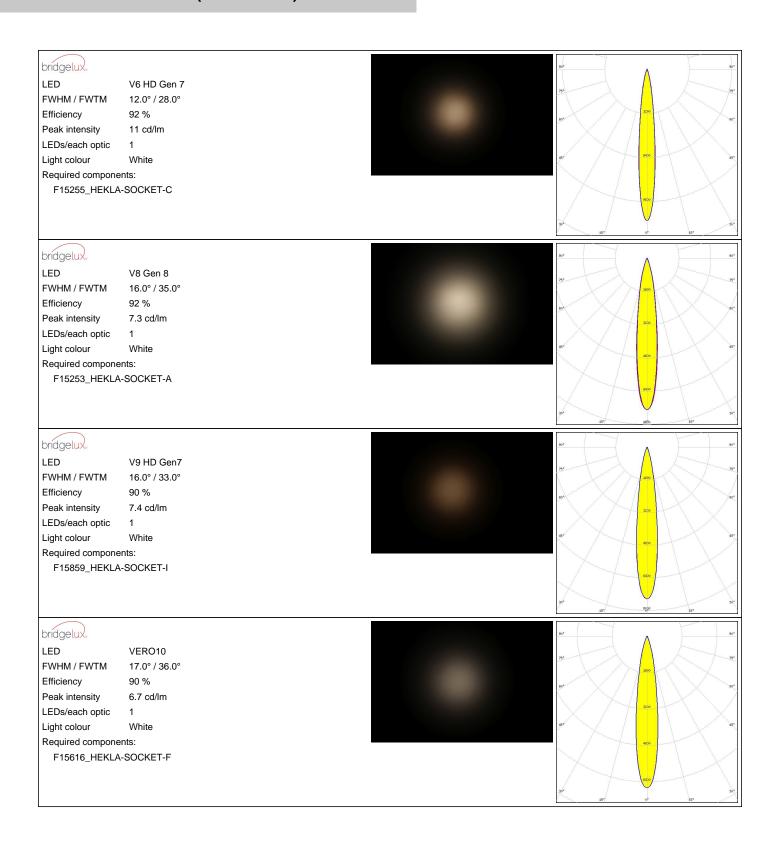



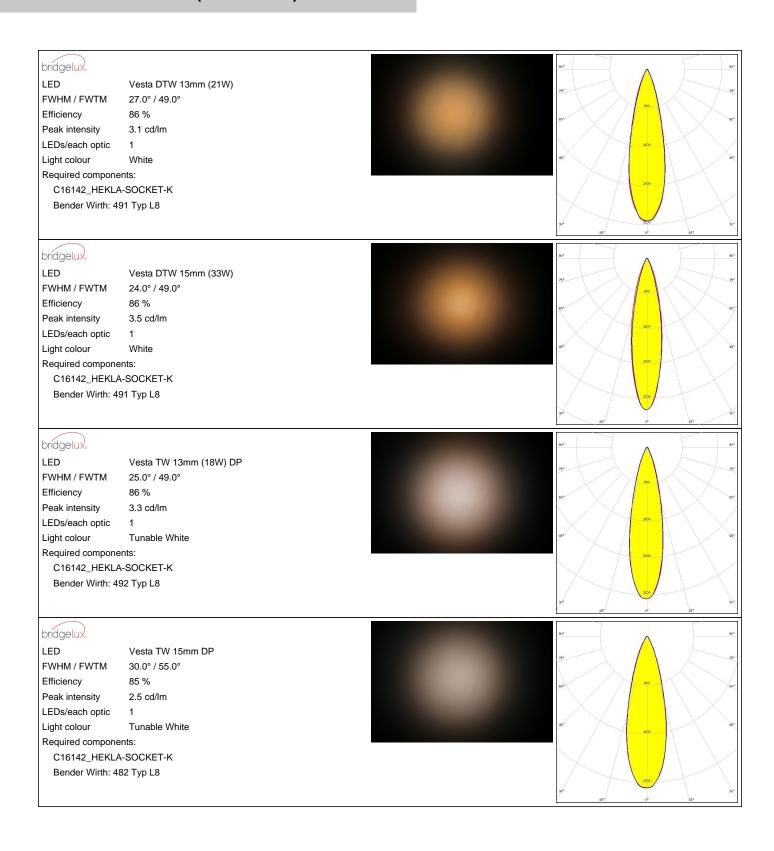




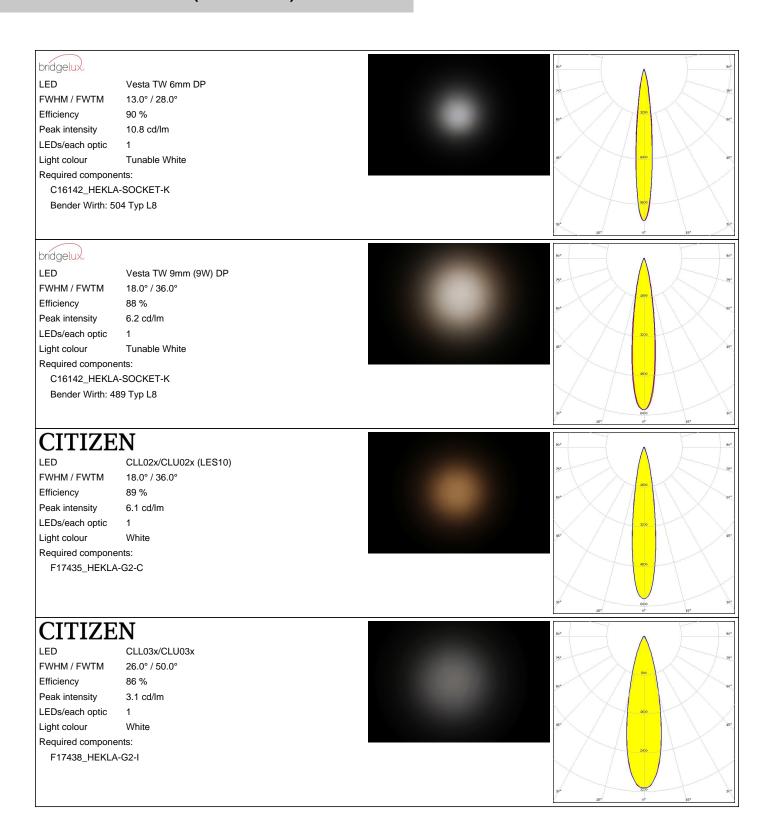




CITIZEN CLU700/701/702/703 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 13.0° / 28.0° Efficiency 90 % Peak intensity 11.2 cd/lm LEDs/each optic Light colour White Required components:



CITIZEN


F17435_HEKLA-G2-C

LED CLU7A2/7A3 FWHM / FWTM 10.0° / 23.0° Efficiency 91 % Peak intensity 15.3 cd/lm LEDs/each optic 1 White Light colour Required components: F17435_HEKLA-G2-C

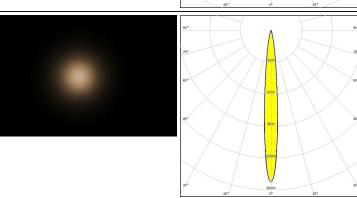

CITIZEN


CLU7B2 FWHM / FWTM 9.0° / 22.0° Efficiency 91 % Peak intensity 18.2 cd/lm LEDs/each optic Light colour White Required components: F17435_HEKLA-G2-C

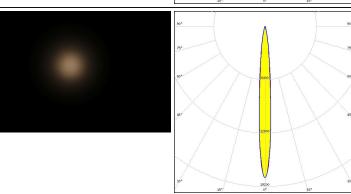


CREE - LED


CMA1516 FWHM / FWTM 17.0° / 35.0° Efficiency 90 % Peak intensity 6.7 cd/lm LEDs/each optic White Light colour Required components:

F17436_HEKLA-G2-D








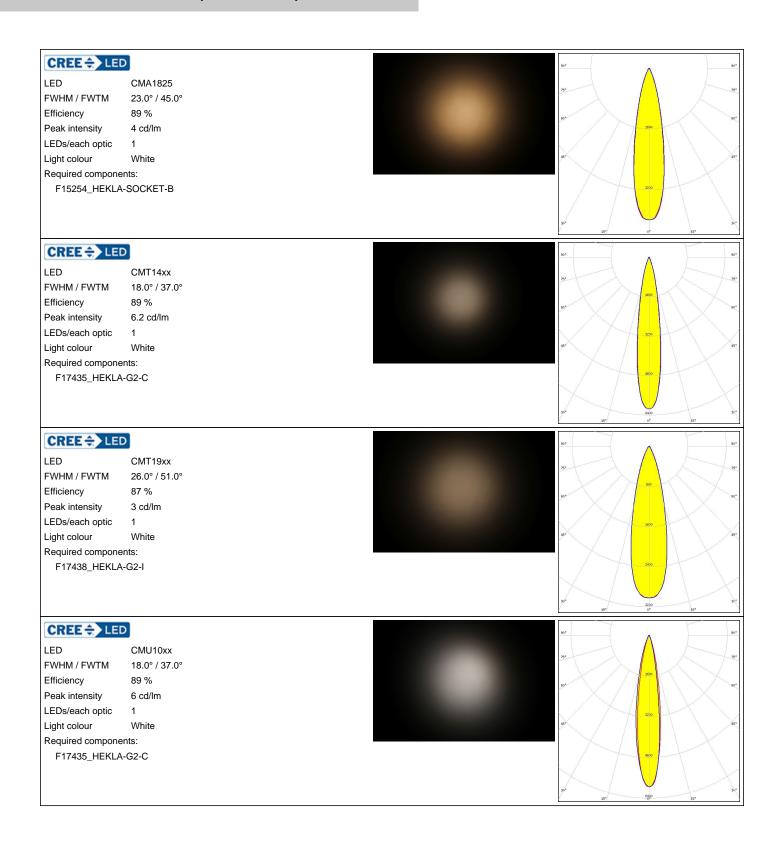


8/20




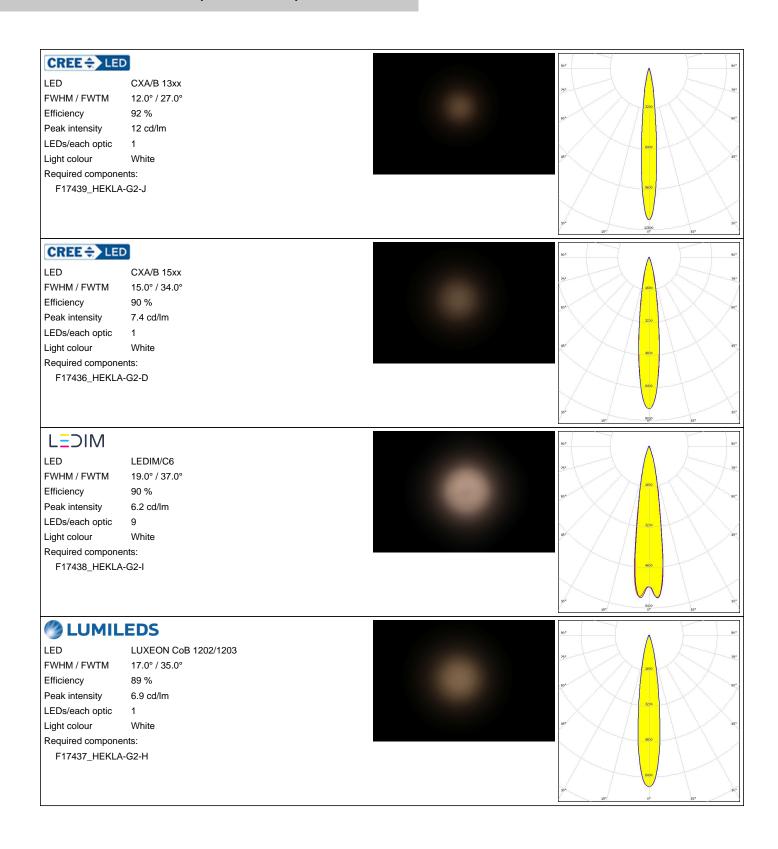




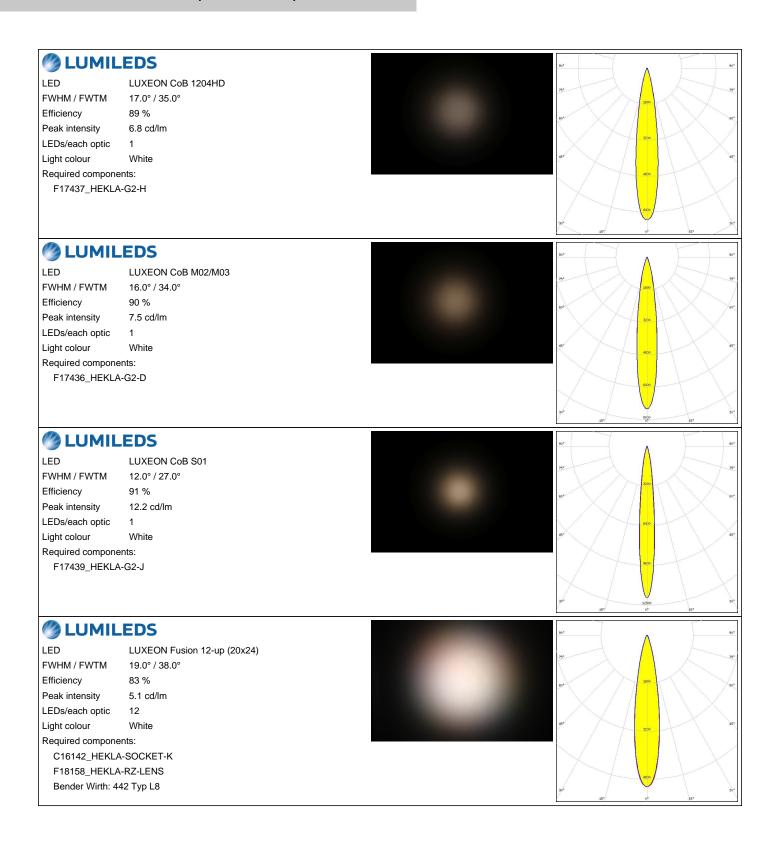



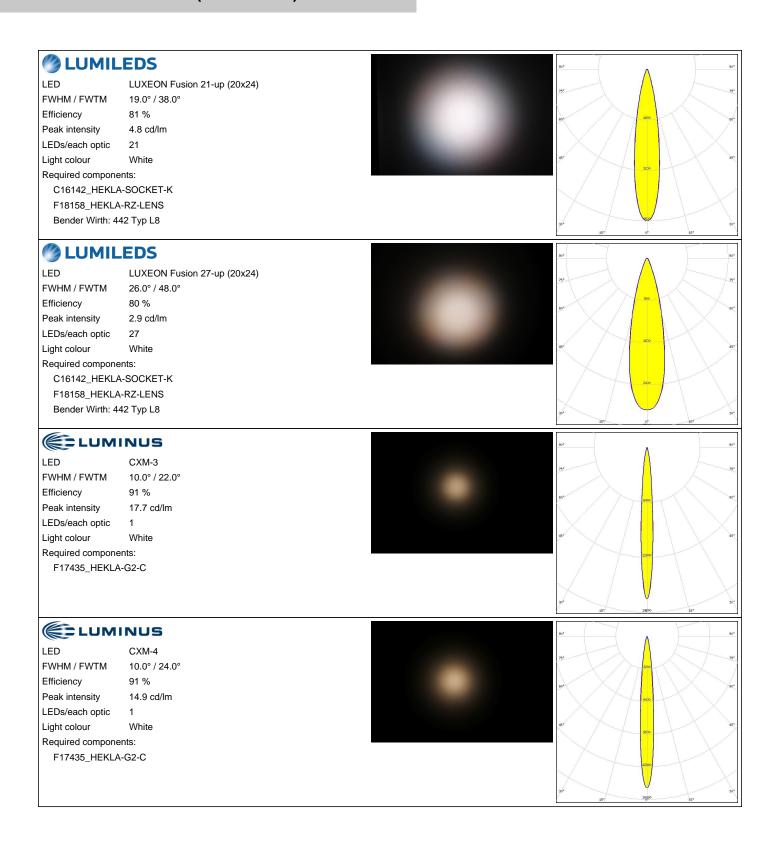



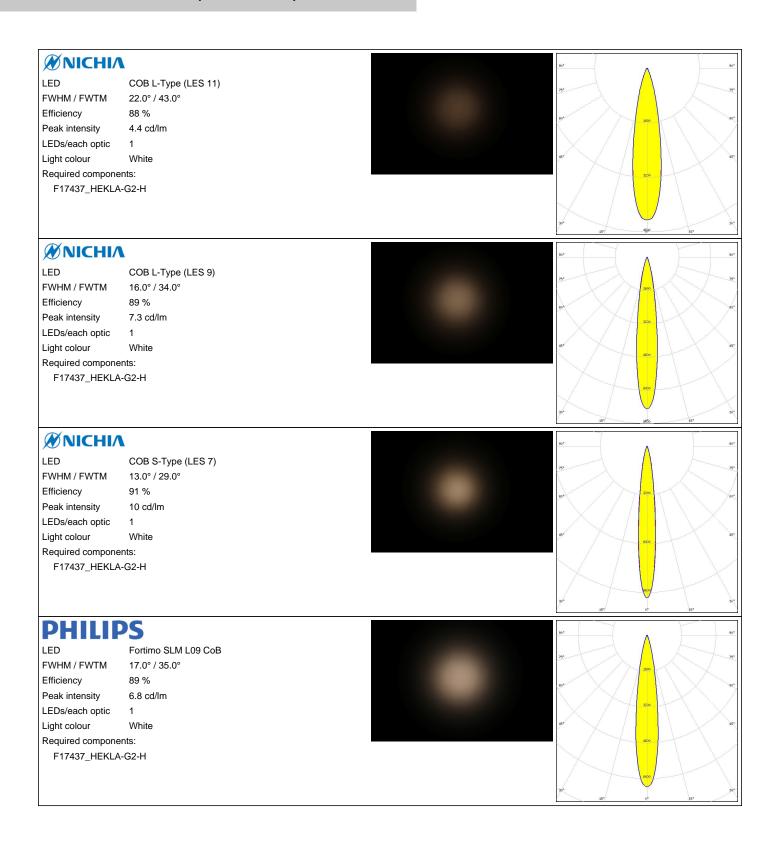




SAMSUNG

LC003D / LC006D / LC009D / LC013D

FWHM / FWTM 17.0° / 36.0° Efficiency 89 % Peak intensity 6.3 cd/lm LEDs/each optic Light colour White Required components:

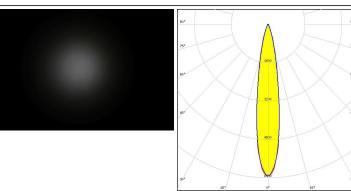


SAMSUNG

F17435_HEKLA-G2-C

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 28.0° / 55.0° Efficiency 86 % Peak intensity 2.7 cd/lm LEDs/each optic 1 White Light colour Required components:


F17438_HEKLA-G2-I

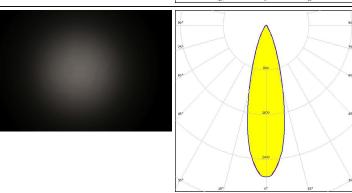

SAMSUNG

LED LC030C/040C G2 FWHM / FWTM 21.0° / 42.0° Efficiency 88 % Peak intensity 4.5 cd/lm

LEDs/each optic Light colour White Required components: F17438_HEKLA-G2-I

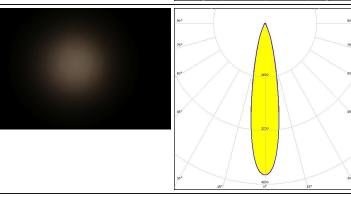


SEOUL SEOUL SEMICONDUCTOR


MJT COB LES 14.5 LED

FWHM / FWTM 28.0° / 53.0° Efficiency 86 % Peak intensity 2.7 cd/lm LEDs/each optic White Light colour

Required components: F17438_HEKLA-G2-I

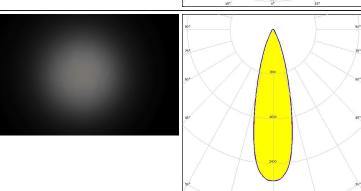



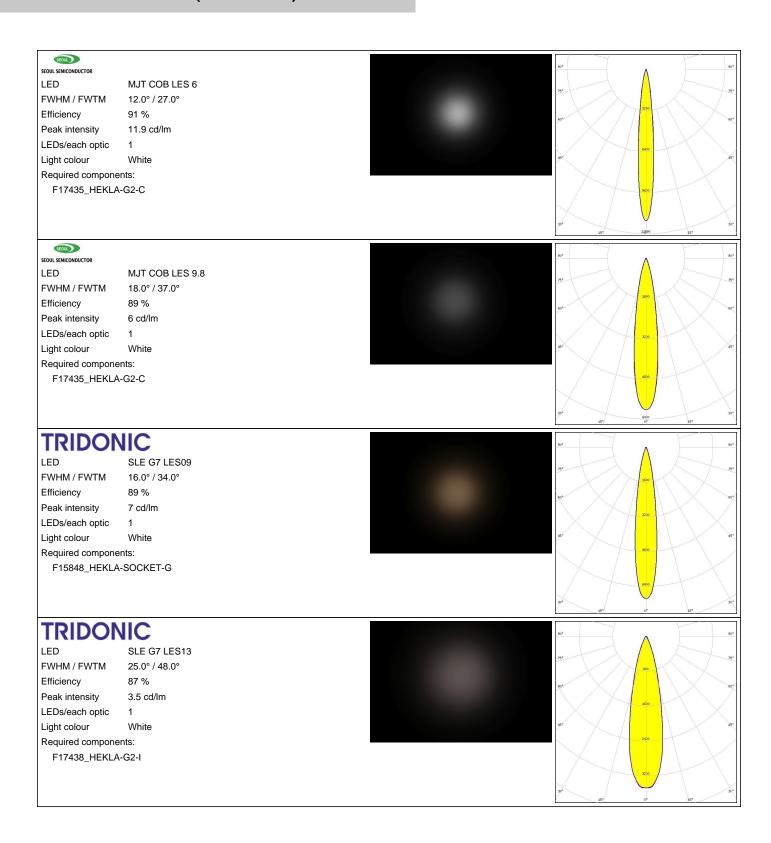



TRIDONIC LED SLE G7 LES15 FWHM / FWTM 27.0° / 53.0° Efficiency 86 % Peak intensity 2.9 cd/lm LEDs/each optic 1 Light colour White Required components: F17438_HEKLA-G2-I



bridgelux

LED V8 Gen7

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 16.0° / 34.0°


Efficiency 89 % Peak intensity 8 cd/lm

LEDs/each optic

Light colour White

Required components:

F15253_HEKLA-SOCKET-A



bridgelux.

LED Vero SE 13

FWHM / FWTM 26.0° / 44.0°


Efficiency 81 % Peak intensity

3.5 cd/lm

LEDs/each optic 1 White Light colour

Required components:

C16142_HEKLA-SOCKET-K



bridgelux

LED Vesta TW 9mm (12W) CSP


FWHM / FWTM 18.1° / 32.2 + 31.2°

Efficiency 81 % Peak intensity 7.1 cd/lm

LEDs/each optic 1

Light colour White Required components:

C16142_HEKLA-SOCKET-K



CITIZEN


CLL02x/CLU02x (LES10)

FWHM / FWTM 18.1° / 33.2 + 34.2°

Efficiency 87 % Peak intensity 6.8 cd/lm LEDs/each optic White Light colour

Required components:

F15255_HEKLA-SOCKET-C






CITIZEN

LED CLU700/701/702/703

FWHM / FWTM 11.3° / 22.1°
Efficiency 91 %
Peak intensity 15 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15255_HEKLA-SOCKET-C



CITIZEN

 LED
 CLU710/711


 FWHM / FWTM
 16.1° / 30.2°

 Efficiency
 89 %

 Peak intensity
 8.7 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15859_HEKLA-SOCKET-I



CITIZEN

 LED
 CLU712/713


 FWHM / FWTM
 16.0° / 34.0°

 Efficiency
 90 %

 Peak intensity
 8.1 cd/lm

LEDs/each optic 1
Light colour White

Required components: F17438_HEKLA-G2-I



CREE - LED

 LED
 CHA0304


 FWHM / FWTM
 10.0° / 22.0°

 Efficiency
 91 %

 Peak intensity
 17.5 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F17435_HEKLA-G2-C





CREE \$\text{LED}

LED CHA0612

FWHM / FWTM 12.0° / 28.0°


Efficiency 91 %

Peak intensity 11.8 cd/lm

LEDs/each optic 1

Light colour White

Required components: F17435_HEKLA-G2-C



CREE - LED

LED CHA0825

FWHM / FWTM 16.0° / 34.0°


Efficiency 90 %

Peak intensity 7.6 cd/lm LEDs/each optic 1

Light colour White

Required components:

F17438_HEKLA-G2-I



CREE - LED

LED CMA1306

FWHM / FWTM 12.0° / 26.0°


Efficiency 94 %

Peak intensity 13.5 cd/lm LEDs/each optic 1

Light colour White

Required components:

F15956_HEKLA-SOCKET-J



MUMILEDS

LED LUXEON CoB 1202/1203

FWHM / FWTM 16.1° / 30.2°


Efficiency 88 %

Peak intensity 8.2 cd/lm LEDs/each optic 1

Light colour White

Required components:

F15858_HEKLA-SOCKET-H






WNICHIA

LED COB S-Type (LES 7)

Assembly NULL
FWHM / FWTM 14.0° / 30.0°
Efficiency 89 %
Peak intensity 10.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Bender Wirth: 652a Hekla




SAMSUNG

LED LC003D / LC006D / LC009D / LC013D

FWHM / FWTM 16.1° / 32.2°
Efficiency 87 %
Peak intensity 7.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15255_HEKLA-SOCKET-C




TRIDONIC

LED SLE SNC8 LES06
FWHM / FWTM 12.0° / 28.0°
Efficiency 93 %
Peak intensity 12.2 cd/lm

LEDs/each optic 1
Light colour White

Required components: F17435_HEKLA-G2-C





PRODUCT DATASHEET CP17694_AMY-50-S-C

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

20/20

www.ledil.com/ where_to_buy