

## ToLEDo Superia T8 UNIVERSAL

ToLEDo Superia T8 Universal V3 4FT 2400LM 840  
0029275



### Product features

- 50,000 hours average rated life
- Last 2.5 times longer than 1200mm 36W fluorescent T8 Tri-phosphor lamp
- High switching cycles - 200,000X
- High lumen efficacy - 150lm/W
- Omni-directional light distribution and wide beam angle
- Minimum and maximum operating temperature: -20°C to 50°C
- Glass construction and polycarbonate end-caps
- Works only with compatible electronic ballast
- Must replace the fluorescent starter with LED dummy starter when used with magnetic/ CCG ballast
- Suitable for direct mains operation (AC 220-240V) with single-end AC input
- Ideal for factories, parking lots, supermarkets, department stores, schools and offices



## PRODUCT OVERVIEW

Product name	ToLEDo Superia T8 Universal V3 4FT 2400LM 840
Technology	LED
Watt (Rated) (W)	16
Lamp shape	Tube, double-ended
Type	LED exchangeable
Lamp finish	Opal
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC001959
E-number FI	4940795
Warranty	5 years
Luminous flux (lm)	2400
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	160
Photobiological Risk Group	RG0
Wattage (W)	16
Product Voltage (V)	230
Dimmable	No
Average life (Nominal) (h)	50000
IP rating	IP20
Product EAN number	5410288292755

## DATA TABLE

### General data

Product name	ToLEDo Superia T8 Universal V3 4FT 2400LM 840
Technology	LED

## ToLEDo Superia T8 UNIVERSAL

ToLEDo Superia T8 Universal V3 4FT 2400LM 840

0029275

Watt (Rated) (W)	16
Lamp shape	Tube, double-ended
Type	LED exchangeable
Lamp finish	Opal
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4940795
Warranty	5 years

### Optical data

Luminous flux (lm)	2400
Luminous flux (Rated) (lm)	2400
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	160
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

### Electrical data

Wattage (W)	16
Product Voltage (V)	230
Lamp power factor	0.9
Control gear required	No
No. Of switching cycles before premature failures	>100000
Transformer required	No
Dimmable	No
Inrush Current (A)	5.3
Inrush Duration (µs)	49
Lamp Energy Label (class)	D
Max. Luminaires per 16A C Breaker	52
Max. Luminaires per 16A B Breaker	85

### Lifetime data

Lifespan L70 B50	50000
Average life (Nominal) (h)	50000
Average life (Rated) (h)	50000

### Physical data

IP rating	IP20
Nominal Product Length (mm)	1213
Nominal Product Diameter (mm)	28

## ToLEDo Superia T8 UNIVERSAL

ToLEDo Superia T8 Universal V3 4FT 2400LM 840  
0029275

Weight (kg) 0.18


### Packaging

Single packaging type	Carton
Product EAN number	5410288292755
Packaging single length / height (cm)	121.0
Packaging single width (cm)	3.0
Packaging single depth (cm)	3.0
DUN14 (outer)	15410288292752
Units per outer package	10
Packaging outer length / height (cm)	120.7
Packaging outer width (cm)	21.0
Packaging outer depth (cm)	11.5


### Safety data

Optimal operating condition (°C)	-20-45
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Suitable for household illumination	Yes
Safety message	None

## PHOTOMETRY

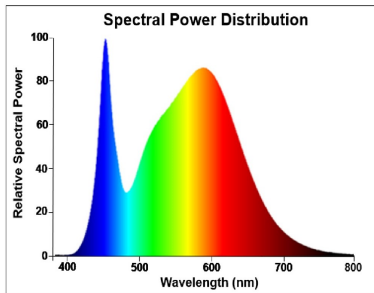

## TECHNICAL DRAWINGS




# SYLVANIA

ToLEDo Superia T8 UNIVERSAL  
*ToLEDo Superia T8 Universal V3 4FT 2400LM 840*  
0029275



SYLVANIA

0029275

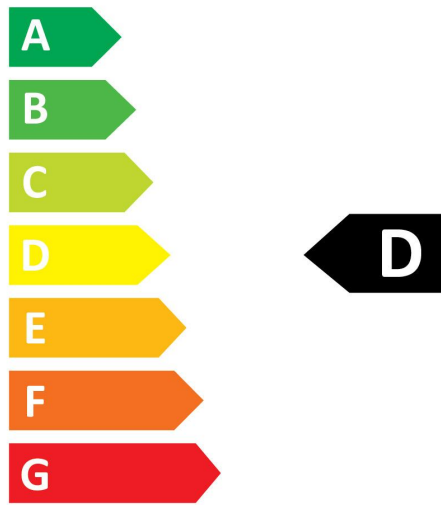

**16**  
kWh/1000h




2019/2015

# SYLVANIA

ToLEDo Superia T8 UNIVERSAL  
*ToLEDo Superia T8 Universal V3 4FT 2400LM 840*  
0029275



0029275

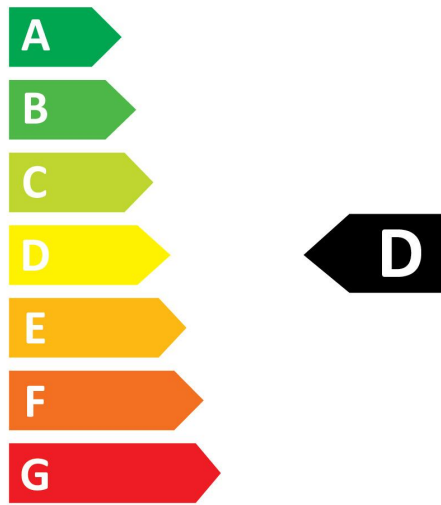

**16**  
kWh/1000h



2019/2015