# T4110002031-000 - ACTIVE

### M12 Connector

TE Internal #: T4110002031-000 M12 Connector, Standard Circular Connectors, Wire-to-Wire, 3 Position, Sealable, Wire & Cable, 4A Contact Current Rating (Max), Signal, PBT

#### View on TE.com >



#### Connectors > Circular Connectors > Standard Circular Connectors > M12 Field Installable Unshielded



Connector System: Wire-to-Wire Number of Positions: **3** Sealable: Yes Connector & Contact Terminates To: Wire & Cable Contact Current Rating (Max): **4**A

#### All M12 Field Installable Unshielded (102)

# Features

## **Product Type Features**

Prewired	No			
Product Type	Connector			
Accessory Color	Black			
Assembly Type	Electrical Connector			
Connector System	Wire-to-Wire			
Sealable	Yes			
Connector & Contact Terminates To	Wire & Cable			
Circular Connector Type	Receptacle			
Shell Type	Plastic			
Configuration Features				
Factory Installed Backshell	No			
Keying	A			
Number of Positions	3			

**C** For support call+1 800 522 6752

M12 Connector, Standard Circular Connectors, Wire-to-Wire, 3 Position, Sealable, Wire & Cable, 4A Contact Current Rating (Max), Signal, PBT



Number of Power Positions	0				
Number of Signal Positions	3				
Contacts Preloaded	Yes				
Electrical Characteristics					
Operating Voltage	250 VAC				
Body Features					
Peripheral Seal Material	Silicone				
Environmental Protection	IP67				
O-Ring Material	Silicone				
Environmental Protection Type	Elastomer Sealed				
Shell Base Material	PBT				
Circular Connector Insulation Material Type	Polyamide 66 GF25				
Contact Features					
Contact Current Rating (Max)	4 A				
Reverse Gender	No				
Circular Connector Contact Type	Socket				

# Mechanical Attachment

Mating Retention Type	Threaded Coupling			
Mating Alignment	With			
Polarization Code	A			
Mating Alignment Type	Keyed			
Housing Features				
Circular Connector Shell Size	20			
Dimensions				
Wire Size	.82 – .2 mm²			
Usage Conditions				
IP Dust Sealing Level	6			
IP Water Sealing Level	IP67			
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F][-40 – 185 °F]			
Operation/Application				
Durability Rating	100 Cycles			

M12 Connector, Standard Circular Connectors, Wire-to-Wire, 3 Position, Sealable, Wire & Cable, 4A Contact Current Rating (Max), Signal, PBT



Circuit Application	Signal
Shielded	No
Industry Standards	
UL Flammability Rating	HB
Packaging Features	
Packaging Quantity	1
Other	
Field Serviceable	Yes
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold:

#### Pb (4% in Alloy in Copper)

#### Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Yet Reviewed for halogen content

#### Halogen Content

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**

M12 Connector, Standard Circular Connectors, Wire-to-Wire, 3 Position, Sealable, Wire & Cable, 4A Contact Current Rating (Max), Signal, PBT





# Also in the Series | M12 Connector

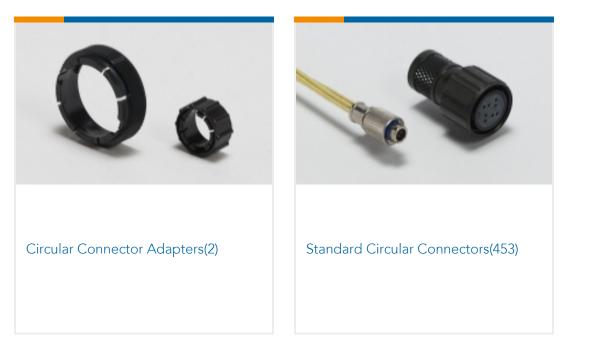

# Customers Also Bought



		= TE	
art #1-2308323-2 STRAIGHT D4 PG CLAMP	TE Part #1-1393243-1 RTE24048	TE Part #2-2176329-5 CRGP 1210 1K0 1%	TE Part #T4171310004-001 M12 Panel Mount Wire
TE STREET	TE	222 E	
art #1622206-1 04 1% 27K	TE Part #1-1337433-0 BNC RM BHJ Hex 50Ohm Nickel Pltd RG58C/U	TE Part #1-1625873-4 RS 0402 1% RESISTOR KIT	TE Part #1SNA290311R0600 FED5.I.3L



M12 Connector, Standard Circular Connectors, Wire-to-Wire, 3 Position, Sealable, Wire & Cable, 4A Contact Current Rating (Max), Signal, PBT



# Documents

**Product Drawings** M12, FEMALE, STRAIGHT, A CODE, 3P, PG9, GOLD

English

# **CAD** Files

3D PDF

3D

**Customer View Model** ENG\_CVM\_CVM\_T4110002031-000\_A.2d\_dxf.zip

English

Customer View Model ENG\_CVM\_CVM\_T4110002031-000\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_T4110002031-000\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages M8 / M12 Connector System Catalog

English

**Product Specifications** Application Specification

English