
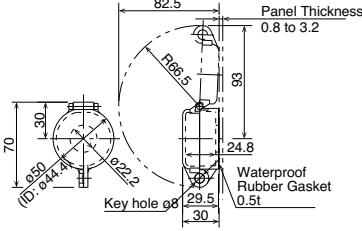







Accessories

All dimensions in mm

When ordering, specify the Ordering No.

Name / Shape	Material	Part No.	Remarks
<p>Padlock Cover</p> 	<p>Polyarylate</p> <p>Gasket: Nitrile rubber</p>	<p>HW9Z-KL1</p>	<ul style="list-style-type: none"> Used to protect pushbuttons, selector switches, and key selector switches. 
<p>Rubber Boot for Dual Pushbutton Switches</p> 	<p>Clear Silicon Rubber</p>	<p>HW9Z-D7D</p>	<ul style="list-style-type: none"> IP65 
<p>Ring Adapter</p> 	<p>Nitril rubber</p>	<p>HW9Z-A25</p>	<ul style="list-style-type: none"> Used to install the HW series units into ø25 mm mounting holes. Degree of protection: IP65 Cannot be used with anti-rotation and nameplate. Mounting panel thickness: 1.2 to 6.0 mm See page 62 for details.
<p>Ring Adapter</p> 	<p>Gasket: polyamide</p> <p>Washer: metal (brass)</p>	<p>HW9Z-A30</p>	<ul style="list-style-type: none"> Used to install the HW series units (round type) into ø30 mm mounting holes (except HW1P-5, HW1E, HW1B-M5/V5, HW7D). Degree of protection: IP65 Cannot be used with anti-rotation ring and nameplate. Cannot be used on full shroud illuminated pushbuttons, selector pushbuttons, and mono-lever switches. Mounting panel thickness: 1.6 to 4.0 mm
<p>For Illuminated Buzzer Terminal Rubber Boot</p> 	<p>Nitrile rubber</p>	<p>HW9Z-CZ1</p>	<ul style="list-style-type: none"> Applicable cable: ø4.5 to 8.5 mm Cut the end of rubber boot to fit the cable size (see dimensions on page 66). Weight: 10 g (approx.)