
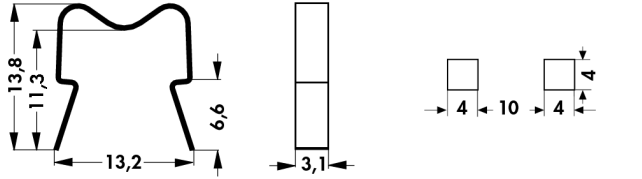
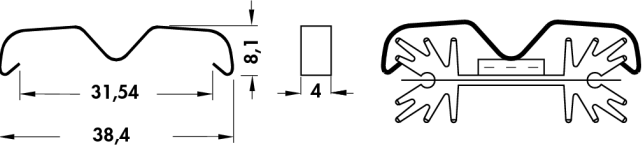
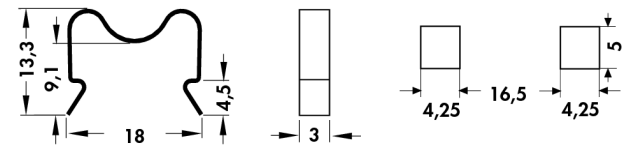
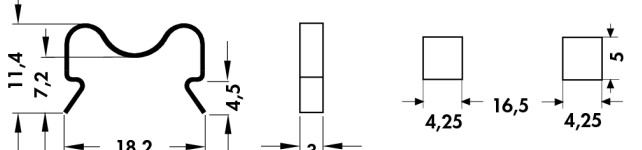
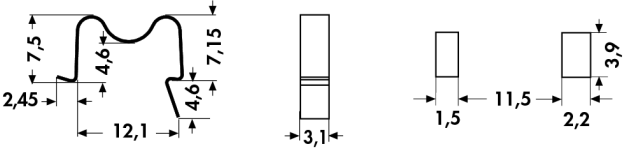
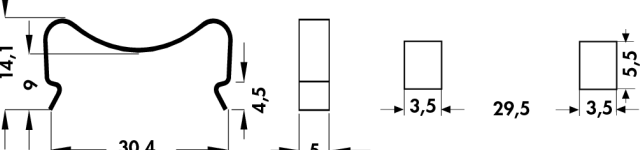
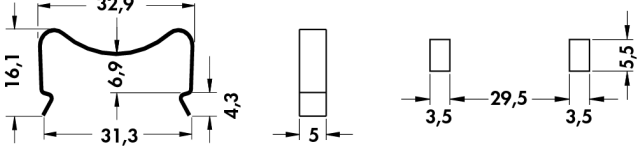
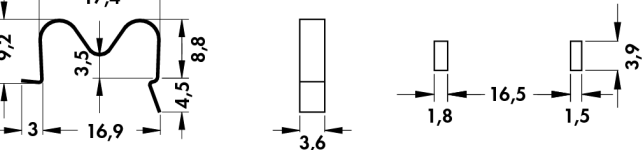


Retaining springs for transistors

art. no.	for transistor-housing	suitable for heatsinks	plate thickness [mm]		
THF 129 TO 220	TO 220	SK 129 FK 219 FK 222	1 - 2	FS	
THF 104	TO 220 TO 3 P TO 247 TO 248	SK 104	1 - 2	FS	
THF 409 TO 220	TO 220 TO 3 P TO 247 TO 248	SK 409 UK 35	1.5 - 3	RS	
THF 409 SOT 32	SOT 32 TO 126 SOT 82	SK 409	2 - 3	RS	
THF 220	TO 220	FK 219 FK 222	1 - 2	FS	
THF 247	TO 220 TO 3 P TO 247 TO 248	SK 484	2	RS	
THF 247 4	TO 218 TO 220 TO 3 P TO 247 TO 248	SK 460	4	RS	
THF 220 17	TO 218 TO 220 TO 3 P TO 247 TO 248	UK 35	1 - 1.5	RS	

material: RS = stainless steel, FS = spring steel, corrosion protected

A 113

Mica wafers
Kapton insulator washers
Insulator caps
Mounting material for semiconduct.

→ E 11
 → E 8
 → E 43
 → E 37 - 41

Silicone wafers
Thermal conductive foil
Thermal conductive paste
Aluminium oxide wafers

→ E 2 - 4
 → E 5
 → E 13
 → E 9 - 10